


# Manual motor starter MS132

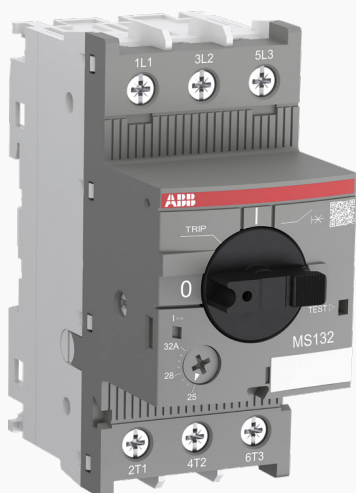

Manual motor starters (also known as motor protection circuit breakers or manual motor protectors) are electromechanical protection devices for the main circuit mainly used to switch motors manually ON/OFF and protect them fuseless against short-circuits, overloads and phase failures.

Fuseless protection with a manual motor starter saves costs, space and ensures a quick reaction under short-circuit condition, by switching off the motor within milliseconds. Fuseless starter combinations are setup together with contactors.

## Description

- Overload protection – trip class 10
- Phase loss sensitivity
- Disconnect function
- Temperature compensation from -25 ... +60 °C
- Adjustable current setting for overload protection
- Suitable for three- and single-phase application
- Trip-free mechanism
- Status indication for short-circuit trip
- Clear switch position indication ON/OFF/TRIP
- Lockable handle




## Order data

MS132 screw terminal

Setting range	Rated operational power 400 V AC-3, AC-3e kW	Type	Order code	Weight Pkg (1 pce) kg
A				
0.10...0.16	0.03	MS132-0.16	1SAM350000R1001	0.215
0.16...0.25	0.06	MS132-0.25	1SAM350000R1002	0.215
0.25...0.40	0.09	MS132-0.4	1SAM350000R1003	0.215
0.40...0.63	0.18	MS132-0.63	1SAM350000R1004	0.215
0.63...1.00	0.25	MS132-1.0	1SAM350000R1005	0.215
1.00...1.60	0.55	MS132-1.6	1SAM350000R1006	0.265
1.60...2.50	0.75	MS132-2.5	1SAM350000R1007	0.265
2.50...4.00	1.50	MS132-4.0	1SAM350000R1008	0.265
4.00...6.30	2.20	MS132-6.3	1SAM350000R1009	0.265
6.30...10.0	4.00	MS132-10	1SAM350000R1010	0.265
8.00...12.0	5.50	MS132-12	1SAM350000R1012	0.310
10.0...16.0	7.50	MS132-16	1SAM350000R1011	0.310
16.0...20.0	7.50	MS132-20	1SAM350000R1013	0.310
20.0...25.0	11.0	MS132-25	1SAM350000R1014	0.310
25.0...32.0	15.0	MS132-32	1SAM350000R1015	0.310

Note: MS132 with pre-assembled auxiliary contact HKF1-11, please order as follow 1SAM350005Rxxxx

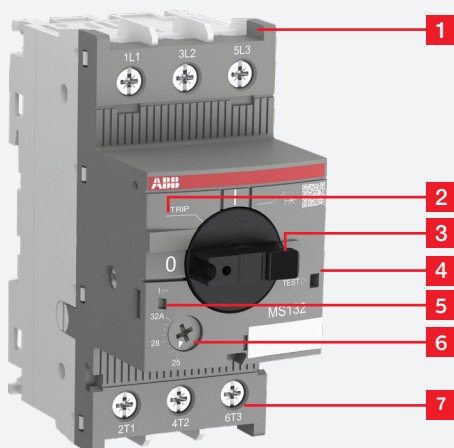

### Functional description


1. Terminals 1L1, 3L2, 5L3
2. Switch position TRIP
3. Lockable handle
4. Test function
5. Status indication for short-circuit
6. Current setting range / Adjustable current setting for overload protection
7. Terminals 2T1, 4T2, 6T3

### Application


Manual motor starters (also known as motor protection circuit breakers or manual motor protectors) protect the load and the installation against short-circuits and overloads. They are three pole protection devices with thermal tripping elements for overload protection and electromagnetic tripping elements for short-circuit protection. Furthermore, they provide a disconnect function for safe isolation of the installation and the supply and

they can be used for manual switching of loads. Manual motor starters have a setting scale in amperes, which allows direct adjusting of the device without any additional calculation. In compliance with international and national standards, the setting current is the rated current of the motor and not the tripping current (no tripping at  $1.05 \times I$ , tripping at  $1.2 \times I$ ;  $I =$  setting current).


### Operation mode

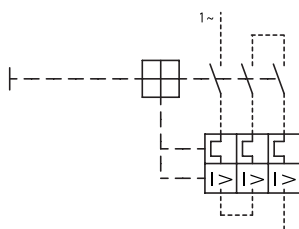

Single-phase operation

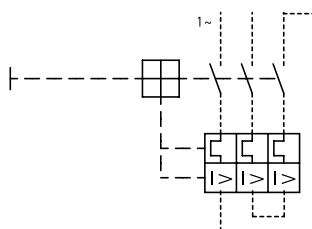


Single-phase operation

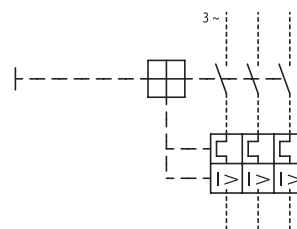


Three-phase operation

### Wiring diagram

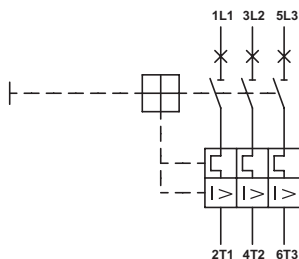

**Resistance and power loss per pole**


Type	Setting range		Resistance per pole	Power loss per pole	
	lower value	upper value		at lower value	at upper value
	A	A	$\Omega$	W	W
MS132-0.16	0.10	0.16	66.00	0.7	1.7
MS132-0.25	0.16	0.25	25.50	0.7	1.6
MS132-0.4	0.25	0.40	10.38	0.6	1.7
MS132-0.63	0.40	0.63	4.36	0.7	1.7
MS132-1.0	0.63	1.00	1.605	0.6	1.6
MS132-1.6	1.00	1.60	0.648	0.6	1.7
MS132-2.5	1.60	2.50	0.292	0.7	1.8
MS132-4.0	2.50	4.00	0.114	0.7	1.8
MS132-6.3	4.00	6.30	0.046	0.7	1.8
MS132-10	6.30	10.0	0.020	0.8	2.0
MS132-12	8.00	12.0	0.016	1.0	2.3
MS132-16	10.0	16.0	0.011	1.1	2.8
MS132-20	16.0	20.0	0.0057	1.5	2.3
MS132-25	20.0	25.0	0.0045	1.8	2.8
MS132-32	25.0	32.0	0.0030	1.9	3.1

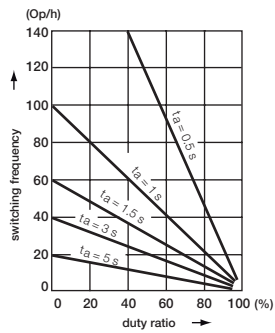


Intermittent periodic duty,  $t_a$ : Motor starting time

**Main Dimensions**


in mm / inches

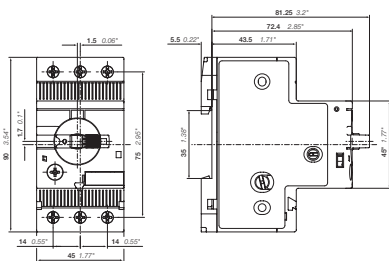


MS132 ≤ 10 A

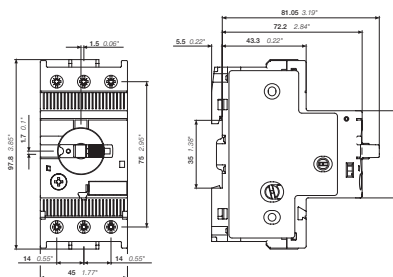

MS132 > 10 A

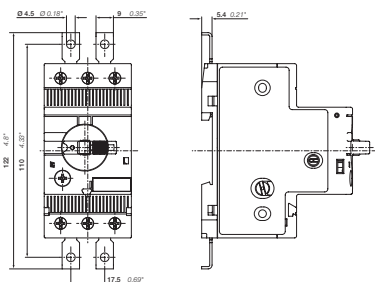

MS132 ≤ 10 A with screw fixing kit FS116 (accessory)

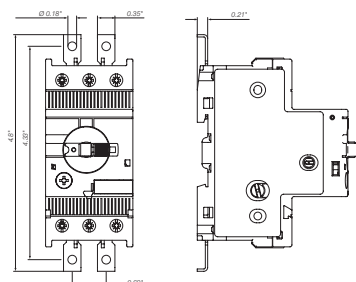

MS132 > 10 A with screw fixing kit FS116 (accessory)

## Technical data IEC/EN

Data at Ta = 40 °C and at rated values, if nothing else indicated





### Main circuit

<b>Terminal marking</b>	1L1-3L2-5L3 2T1-4T2-6T3
Rated operational voltage Ue	690 V AC / 250 V DC (3 poles in series)
Setting range - thermal overload protection	see table "Order data" on page 1
Rated operational current Ie	see table below
Rated operational current DC-5 Ie 3 poles in series, up to 250 V DC	see "Rated operational current Ie"
Rated instantaneous short-circuit current setting Ii	see table below
Rated service short-circuit breaking capacity Ics	see table below
Rated ultimate short-circuit breaking capacity Icu	see table "Short-circuit breaking capacity and back-up fuses" on page 6
Rated service short-circuit breaking capacity DC Ics (250 V DC) 3 poles in series	10 kA
Trip class	10
Rated frequency	DC, 50/60 Hz
Frequency range	0 ... 400 Hz
Number of poles	3
Resistance per pole	see table "Resistance and power loss per pole" on page 3
Power loss per pole	

### Isolation data

Rated impulse withstand voltage Uimp	6 kV
Rated insulation voltage Ui	690 V
Pollution degree	3

### Electrical connection

Type		MS132 ≤ 10 A	MS132 ≥ 12 A
Connecting capacity			
 Rigid	1 or 2 x	1 ... 4 mm <sup>2</sup>	1 ... 2.5 mm <sup>2</sup> 2.5 ... 6 mm <sup>2</sup>
 Flexible with ferrule	1 or 2 x	0.75 ... 2.5 mm <sup>2</sup>	0.75 ... 6 mm <sup>2</sup>
 Flexible with insulated ferrule	1 or 2 x	0.75 ... 2.5 mm <sup>2</sup>	0.75 ... 6 mm <sup>2</sup>
 Flexible	1 or 2 x	0.75 ... 2.5 mm <sup>2</sup>	1 ... 2.5 mm <sup>2</sup> 2.5 ... 6 mm <sup>2</sup>
Stripping length		9 mm	10 mm
Tightening torque		0.8 ... 1.2 Nm / 10 ... 12 lb.in	2.0 Nm / 18 lb.in
Recommended screwdriver		Pozidriv 2	Pozidriv 2

Type	Rated instantaneous short-circuit current setting Ii	Rated operational current Ie
	A	A
MS132-0.16	2.00	0.16
MS132-0.25	3.13	0.25
MS132-0.4	5.00	0.40
MS132-0.63	7.88	0.63
MS132-1.0	12.50	1.00
MS132-1.6	20.00	1.60
MS132-2.5	31.25	2.50
MS132-4.0	50.00	4.00
MS132-6.3	78.75	6.30
MS132-10	150	10.0
MS132-12	180	12.0
MS132-16	240	16.0
MS132-20	300	20.0
MS132-25	375	25.0
MS132-32	480	32.0

**General data**

Mechanical durability	100 000	
Electrical durability	50 000	
Duty time	100%	
Operating frequency without early tripping	up to 15 operations/h or 60 operations/h with 40 % duty ratio, if the motor breaking current $6 \times I_n$ and the motor starting time does not exceed 1 s	
Dimensions (W x H x D)	see drawing "Dimensions" on page 3	
Weight	see table "Order data" on page 1	
Mounting on DIN rail	TH35-15 (35 x 15 mm Mounting Rail) acc. to IEC 60715 TH35-7.5 (35 x 7.5 mm Mounting Rail) acc. to IEC 60715	
Mounting position	position 1-6 (optional for single mounting)	
Group mounting	on request	
Minimum distance to other units same type	horizontal	0 mm
	vertical	150 mm
Minimum distance to electrical conductive board	horizontal, up to 400 V	0 mm
	horizontal, up to 690 V	> 1.5 mm
	vertical	75 mm
Degree of protection	housing	IP20
	main circuit terminals	IP10
Utilization category	A	
Maximum operating altitude permissible	2000 m	
Maximum operating frequency	170 cycles/h	

**Environmental data**

Ambient air temperature Operation	open - compensated	-25 ... +60 °C
	open	-25 ... +70 °C
	enclosed (IB132)	0 ... +40 °C
Storage		-50 ... +80 °C
Ambient air temperature compensation	acc. to IEC/EN 60947-4-1	
Resistance to vibrations acc. to IEC 60068-2-6	5g / 3 ... 150 Hz	
Resistance to shock acc. to IEC 60068-2-27	25g / 11 ms	

**Standards / directives**

Standards	IEC/EN 60947-1 IEC/EN 60947-2 IEC/EN 60947-4-1 UL 60947-1 UL 60947-4-1 CSA-C22.2 No. 60947-1 CSA-C22.2 No. 60947-4-1
Low Voltage Directive	2014/35/EU
RoHS Directive	2011/65/EU incl. 2015/863/EU

## Short-circuit breaking capacity and back-up fuses

Ics Rated service short-circuit breaking capacity

Icu Rated ultimate short-circuit breaking capacity

Iq (Icc) Rated conditional short-circuit current

- No back-up fuse required, because short-circuit proof up to Icu (for Icu see table below)

Type	250 V DC <sup>(2)</sup>			230 V AC			400 V AC			440 V AC			500 V AC			690 V AC		
	Icu kA	Ics kA	gG A	Ics kA	Icu kA	gG A	Ics kA	Icu kA	gG A	Ics kA	Icu kA	gG A	Ics kA	Icu kA	gG A	Ics kA	Icu kA	gG A
MS132-0.16	10	10	-	100	100	-	100	100	-	100	100	-	100	100	-	100	100	-
MS132-0.25	10	10	-	100	100	-	100	100	-	100	100	-	100	100	-	100	100	-
MS132-0.4	10	10	-	100	100	-	100	100	-	100	100	-	100	100	-	100	100	-
MS132-0.63	10	10	-	100	100	-	100	100	-	100	100	-	100	100	-	100	100	-
MS132-1.0	10	10	-	100	100	-	100	100	-	100	100	-	100	100	-	100	100	-
MS132-1.6	10	10	-	100	100	-	100	100	-	100	100	-	100	100	-	100	100	-
MS132-2.5	10	10	-	100	100	-	100	100	-	100	100	-	100	100	-	100	100	-
MS132-4.0	10	10	-	100	100	-	100	100	-	30	30	35 (1)	20	20	35 (1)	3	3	32 (1)
MS132-6.3	10	10	-	100	100	-	100	100	-	30	30	63 (1)	20	20	63 (1)	3	3	50 (1)
MS132-10	10	10	-	100	100	-	100	100	-	30	30	100 (1)	20	20	100 (1)	3	3	50 (1)
MS132-12	10	10	-	100	100	-	100	100	-	30	30	100 (1)	20	20	100 (1)	3	3	63 (1)
MS132-16	10	10	-	100	100	-	100	100	-	30	30	125 (1)	20	20	125 (1)	3	3	63 (1)
MS132-20	10	10	-	100	100	-	100	100	-	30	30	125 (1)	20	20	125 (1)	3	3	80 (1)
MS132-25	10	10	-	50	50	125 (1)	50	50	125 (1)	30	30	125 (1)	10	10	125 (1)	3	3	100 (1)
MS132-32	10	10	-	30	50	125 (1)	30	50	125 (1)	30	30	125 (1)	10	10	125 (1)	3	3	100 (1)

(1) Maximum rated current of the back-up fuse for short circuit up to 100kA if Icc > Ics



(2) 3 poles in series

## Technical data UL/CSA

### Main circuit

Maximum operational voltage	600 V
Manual Motor Controller ratings	see table below
Motor ratings	Horsepower
	Full Load Amps (FLA)
	Locked Rotor Amps (LRA)
	see table below

### Electrical connection

Type		MS132 ≤ 10 A	MS132 ≥ 12 A
	stranded	1 or 2 x AWG 16 ... 12	AWG 16 ... 8
	flexible without ferrule	1 or 2 x AWG 16 ... 12	AWG 16 ... 8
Stripping length		9 mm	10 mm
Tightening torque		10 ... 12 lb-in	18 lb-In
Recommended screwdriver		Pozidriv 2	

Note: For UL listed, use 75°C stranded Cu wire only.

**UL/CSA Motor ratings, single phase**

hp Horse power

FLA Full load amps

LRA Locked rotor amps

Type	110 - 120 VAC			200 Vac			208 Vac			220-240 V ac			440-480 VAC		
	hp	FLA	LRA	hp	FLA	LRA	hp	FLA	LRA	hp	FLA	LRA	hp	FLA	LRA
MS132-0.16	-	0.16	0.96	-	0.16	0.96	-	0.16	0.96	-	0.16	0.96	-	0.16	0.96
MS132-0.25	-	0.25	1.5	-	0.25	1.5	-	0.25	1.5	-	0.25	1.5	-	0.25	1.5
MS132-0.4	-	0.4	2.4	-	0.4	2.4	-	0.4	2.4	-	0.4	2.4	-	0.4	2.4
MS132-0.63	-	0.63	3.78	-	0.63	3.78	-	0.63	3.78	-	0.63	3.78	-	0.63	3.78
MS132-1.0	-	1	6	-	1	6	-	1	6	-	1	6	-	1	6
MS132-1.6	-	1.6	9.6	-	1.6	9.6	-	1.6	9.6	1/10	1.6	9.6	-	1.6	9.6
MS132-2.5	-	2.5	15	1/6	2.5	15	1/6	2.5	15	1/6	2.5	15	1/2	2.5	15
MS132-4.0	1/8	4	24	1/4	4.0	24	1/3	4	24	1/3	4	24	1	4	24
MS132-6.3	1/4	6.3	37.8	1/2	6.3	37.8	1/2	6.3	37.8	1/2	6.3	37.8	2	6	36
MS132-10	1/2	9.8	58.8	1	10	60	1	8.8	52.8	1 1/2	10	60	3	8.5	51
MS132-12	1/2	9.8	58.8	1 1/2	12	72	1 1/2	12	72	2	12	72	3	8.5	51
MS132-16	1	16	96	2	13.8	82.8	2	13.2	79.2	2	12	72	5	14	84
MS132-20	1 1/2	20	120	3	19.6	118	3	18.7	112	3	17	102	5	14	84
MS132-25	2	24	144	3	19.6	118	3	18.7	112	3	17	102	7 1/2	21	126
MS132-32	2	24	144	3	19.6	118	5	30.8	185	5	28	168	10	26	156

**UL/CSA Motor ratings, three phase**

	110-120 VAC			200 VAC			208 VAC			220-240 VAC			440-480 VAC			550-600 VAC		
	hp	FLA	LRA	hp	FLA	LRA	hp	FLA	LRA	hp	FLA	LRA	hp	FLA	LRA	hp	FLA	LRA
MS132-0.16	-	0.16	0.96	-	0.16	0.96	-	0.16	0.96	-	0.16	0.96	-	0.16	0.96	-	0.16	0.96
MS132-0.25	-	0.25	1.5	-	0.25	1.5	-	0.25	1.5	-	0.25	1.5	-	0.25	1.5	-	0.25	1.5
MS132-0.4	-	0.4	2.4	-	0.4	2.4	-	0.4	2.4	-	0.4	2.4	-	0.4	2.4	-	0.4	2.4
MS132-0.63	-	0.63	3.78	-	0.63	3.78	-	0.63	3.78	-	0.63	3.78	-	0.63	3.78	-	0.63	3.78
MS132-1.0	-	1	6	-	1	6	-	1	6	-	1	6	-	1	6	1/2	1	6
MS132-1.6	-	1.6	9.6	-	1.6	9.6	-	1.6	9.6	-	1.6	9.6	3/4	1.6	9.6	3/4	1.6	9.6
MS132-2.5	-	2.5	15	1/2	2.5	15	1/2	2.5	15	1/2	2.5	15	1	2.5	15	1 1/2	2.5	15
MS132-4.0	-	4	24	3/4	4	24	3/4	4	24	3/4	4	24	2	4	24	3	3.9	25.6
MS132-6.3	1/2	6.3	37.8	1	6.3	37.8	1	6.3	37.8	1 1/2	6.3	37.8	3	4.8	32	5	6.1	36.8
MS132-10	1	10	60	2	7.8	57.5	2	7.5	55	3	9.6	64	5	7.6	46	7 1/2	9	50.8
MS132-12	1 1/2	12	72	3	11	73.6	3	10.6	71	3	9.6	64	7 1/2	11	63.5	10	11	64.8
MS132-16	2	16	84	3	11	73.6	3	10.6	71	5	15.2	92	10	14	81	10	11	64.8
MS132-20	3	19.2	128	5	17.5	105.8	5	16.7	102	5	15.2	92	10	14	81	15	17	93
MS132-25	3	19.2	128	5	17.5	105.8	7 1/2	24.2	140	7 1/2	22	127	15	21	116	20	22	116
MS132-32	5	30.4	184	7 1/2	25.3	146	10	30.8	179	10	28	162	20	27	145	25	27	146

**UL/CSA Maximum short-circuit current ratings – MS132**

Type	Manual Motor Controllers								Manual self-protected Combination Motor Controllers (Type E) (2)	
	Branch circuit protection, max. size per NEC/CEC (1)		for motor disconnect		for group installations		for tap conductor protection in group installations			
	Fuses	Circuit breaker	480 V	600 V	480 V	600 V	480Y / 277 V	600Y / 347 V	480Y / 277 V	600Y / 347 V
A	A	kA	kA	kA	kA	kA	kA	kA	kA	
MS132-0.16	Any Listed fuses. Size per NEC/CEC	Any Listed UL489 / CSA C22.2 No.5 circuit breaker. Size per NEC/CEC	65	47	65	47	65	47	65	47
MS132-0.25			65	47	65	47	65	47	65	47
MS132-0.4			65	47	65	47	65	47	65	47
MS132-0.63			65	47	65	47	65	47	65	47
MS132-1.0			65	47	65	47	65	47	65	47
MS132-1.6			65	47	65	47	65	47	65	47
MS132-2.5			65	47	65	47	65	47	65	47
MS132-4.0			65	47	65	47	65	47	65	47
MS132-6.3			65	18	65	18	65	18	65	18
MS132-10			65	18	65	18	65	18	65	18
MS132-12			30	18	30	18	30	18	30	18
MS132-16			30	18	30	18	30	18	30	18
MS132-20			30	18	30	18	30	18	30	18
MS132-25			30	18	30	18	30	18	30	18
MS132-32			30	18	30	18	30	18	30	18

(1) NEC: NFPA®70 National Electrical Code®; CEC: CSA C22.1 Canadian Electrical Code.

(2) In combination with feeder block S1-M3-xx or terminal spacer TS1-M3-S1 (for 0.16...10 A) / TS1-M3-S2 (for 12...32 A).

**UL/CSA Maximum short-circuit current ratings – MS132 with AF contactors**

Type	Combination Motor Controllers (Type F) (1)		
	Coordination type 1 Minimum contactor size	480Y / 277 V kA	600Y / 347 V kA
MS132-0.16	AF09 ... AF38	100	50
MS132-0.25	AF09 ... AF38	100	50
MS132-0.40	AF09 ... AF38	100	50
MS132-0.63	AF09 ... AF38	100	50
MS132-1.0	AF09 ... AF38	100	50
MS132-1.6	AF09 ... AF38	100	50
MS132-2.5	AF09 ... AF38	100	50
MS132-4.0	AF09 ... AF38	100	50
MS132-6.3	AF09 ... AF38	100	47
MS132-10	AF09 ... AF38	100	30
MS132-12	AF09 ... AF38	65	30
MS132-16	AF12 ... AF38	65	30
MS132-20	AF26 ... AF38	65	-
MS132-25	AF26 ... AF38	50	-
MS132-32	AF38	50	-
	Coordination type 2		
MS132-0.16	AF26 ... AF38	65	47
MS132-0.25	AF26 ... AF38	65	47
MS132-0.40	AF26 ... AF38	65	47
MS132-0.63	AF26 ... AF38	65	47
MS132-1.0	AF26 ... AF38	65	47
MS132-1.6	AF26 ... AF38	65	47
MS132-2.5	AF26 ... AF38	65	47
MS132-4.0	AF26 ... AF38	65	47
MS132-6.3	AF26 ... AF38	65	47
MS132-10	AF26 ... AF38	65	47
MS132-12	AF26 ... AF38	30	-
MS132-16	AF26 ... AF38	30	-
MS132-20	AF26 ... AF38	30	-
MS132-25	AF26 ... AF38	30	-
MS132-32	AF26 ... AF38	30	-

**Self-Protected Combination Motor Controller (Type E) and Combination Motor Controller (Type F) in combination with current limiter S803W-SCLxxx-SR**

Type	Self-Protected Combination Motor Controller (Type E) in combination with current limiter S803W-SCLxxx-SR (1)	Combination Motor Controller (Type F) in combination with current limiter S803W-SCLxxx-SR (1)	
	Maximum short-circuit current rating 480Y / 277 V kA	Maximum short-circuit current rating 480Y / 277 V kA	Minimum contactor size
MS132-0.16	65	65	AF26...AF38
MS132-0.25	65	65	AF26...AF38
MS132-0.4	65	65	AF26...AF38
MS132-0.63	65	65	AF26...AF38
MS132-1.0	65	65	AF26...AF38
MS132-1.6	65	65	AF26...AF38
MS132-2.5	65	65	AF26...AF38
MS132-4.0	65	65	AF26...AF38
MS132-6.3	65	65	AF26...AF38
MS132-10	65	65	AF26...AF38
MS132-12	65	-	-
MS132-16	65	-	-
MS132-20	65	-	-
MS132-25	65	-	-
MS132-32	65	-	-

(1) In combination with feeder block S1-M3-xx or terminal spacer TS1-M3-S1 (for 0.16 ... 10 A) / TS1-M3-S2 (for 12 ... 32 A).

NOTE : More coordination tables are available in our SOC (selected optimized coordination) tool:  
<https://applications.it.abb.com/SOC/Motor>.





---

**ABB STOTZ-KONTAKT GmbH**  
Eppelheimer Straße 82  
69123 Heidelberg, Germany  
Phone: +49 (0) 6221 7 01-0  
Fax: +49 (0) 6221 7 01-13 25  
E-Mail: [info.desto@de.abb.com](mailto:info.desto@de.abb.com)

[abb.com/contacts](http://abb.com/contacts)

We reserve the right to make technical changes or modify the contents of this document without prior notice. With regards to purchase orders, the agreed particulars shall prevail. ABB AG does not accept any responsibility whatsoever for potential errors or possible lack of information in this document.

We reserve all rights in this document and in the subject matter and illustrations contained therein. Any reproduction, disclosure to third parties or utilization of its contents – in whole or in parts – is forbidden without prior written consent of ABB AG.

Copyright© 2024 ABB - All rights reserved