

# COMPACT SIZE PANEL MOUNT INDICATOR, NON-RELAMPABLE LED TECHNOLOGY

MOUNTING HOLE, Ø 0.310"

PART NO.	LENS COLOR	VOLTAGE	CURRENT [mA]	RATED LIFE HOURS
<b>LED 6V SERIES</b>				
WL-2191SU1-6V	RED	5V-6V	20mA	100,000
WL-2191SU5-6V	GREEN	5V-6V	20mA	100,000
WL-2191SU6-6V	BLUE	5V-6V	20mA	100,000
WL-2191SU7-6V	YELLOW	5V-6V	20mA	100,000
<b>LED 12V SERIES</b>				
WL-2191SU1-12V	RED	12V-14V	20mA	100,000
WL-2191SU5-12V	GREEN	12V-14V	20mA	100,000
WL-2191SU6-12V	BLUE	12V-14V	20mA	100,000
WL-2191SU7-12V	YELLOW	12V-14V	20mA	100,000
<b>LED 24V SERIES</b>				
WL-2191SU1-24V	RED	24V-28V	20mA	100,000
WL-2191SU5-24V	GREEN	24V-28V	20mA	100,000
WL-2191SU6-24V	BLUE	24V-28V	20mA	100,000
WL-2191SU7-24V	YELLOW	24V-28V	20mA	100,000


## NOTES

1. Minimum panel thickness 0.030"
2. 6" leads with 1/2" strip are standard
3. Due to compact size, components (resistors, diodes) will be installed in the leads
4. Storage temperature  
 $T_{STG}: -25^{\circ}\text{C} - +80^{\circ}\text{C}$
5. Ambient temperature  
 $T_A: -20^{\circ}\text{C} - +60^{\circ}\text{C}$
6. Voltage tolerance  
 $V_{OP}: \pm 10\%$
7. Body material  
Nylon, white
8. Lens material  
Polycarbonate
9. Bezel material  
Chrome
10. Wire gauge  
20 AWG
11. Wire strip  
1/2"
12. Anode(+)  
Red lead
13. Tinnerman clips available separately

## CERTIFICATIONS

**RoHS**  
COMPLIANT

## DIMENSIONAL CHARACTERISTICS

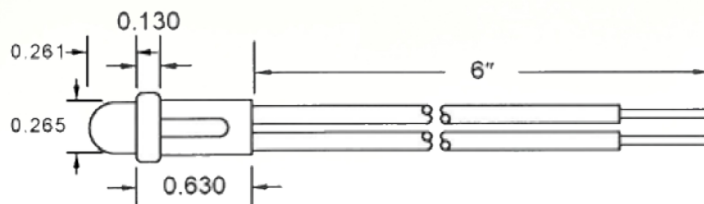

unless otherwise specified, all dimensions are in inches



## OPTIONS

Additional options and lens styles available. Please contact Wamco for more information.

