

# SGX-41F

## SOLID STATE RELAY 4 AMPS 48 TO 400 VRMS



### FEATURES

- Photo isolation
- Up to 800V blocking voltage
- Both zero cross or random turn-on
- High surge capability
- Built-in snubber
- UL, CUR file E43203
- SCR or Triac Output Circuitry
- RoHS compliant

### INPUT

| Type                  | 1D              | 2D              |
|-----------------------|-----------------|-----------------|
| Control Voltage Range | 3 to 15 VDC     | 15 to 32 VDC    |
| Turn On Voltage       | 3 VDC max.      | 15 VDC max.     |
| Turn Off Voltage      | 1 VDC min.      | 1 VDC min.      |
| Max. Input Current    | 40 mA at 15 VDC | 20 mA at 32 VDC |
| Max. Reverse Voltage  | -15 VDC         | -32 VDC         |

### OUTPUT

| Type                                 | 240  | 380           |
|--------------------------------------|--|---------------|
| Output Voltage Range                 | 48 to 264 VAC  | 48 to 400 VAC |
| Blocking Voltage                     | 600 Vpk  | 800 Vpk       |
| Max. Leakage Current (off)           | 5 mA   | 5 mA          |
| Max. Voltage Drop (at rated current) | 1.7 VRMS   |               |
| Max. Turn-On Time                    | Random Turn On (DC input): 1 ms<br>Zero Cross Turn On (DC input): 1/2 cycles + 1 ms<br>AC Input: 20 ms |               |
| Max. Turn-Off Time                   | DC Input: 1/2 cycle + 1 ms<br>AC Input: 40 ms  |               |
| Min. Off-State (dv/dt)               | Triac: 200 V/us / SCR: 500 V/us  |               |

### GENERAL

|                       |   |
|-----------------------|---|
| Dielectric Strength   | 4000 Vrms min. (at 50/60 Hz, 1 min.)  |
| Insulation Resistance | 1000 Min. (at 500 VDC)  |
| Ambient Temperature   | Operating: -30°C (-22°F) to 80°C (176°F)<br>Storage: -30°C (122°F) to 100°C (212°F) |
| Termination           | PCB   |
| Weight                | 15g   |



**AMERICAN ZETTLER, INC.**

[www.azettler.com](http://www.azettler.com)

75 COLUMBIA • ALISO VIEJO, CA 92656 • PHONE: (949) 831-5000 • FAX: (949) 831-8642 • E-MAIL: SALES@AZETTLER.COM

1/11/06W

# SGX-41F

## RELAY ORDERING DATA

| SGX-41F | 1D                                  | 240                                      | A          | 4            | Z  | S                    | G        |
|---------|-------------------------------------|--|------------|--------------|--|----------------------|----------|
| MODEL   | INPUT VOLTAGE                       | OPERATING VOLTAGE RANGE                  | LOAD TYPE  | LOAD CURRENT | ZERO CROSS OR RANDOM                       | OUTPUT DEVICE        | PACKAGE  |
|         | 1D: 3 TO 15 Vdc<br>2D: 15 to 32 Vdc | 240: 48 TO 264 Vac<br>380: 48 to 400 Vac | A: AC LOAD | 4: 4A        | Z: Zero cross turn on<br>P: Random turn on | S: SCR<br>Nil: Triac | G: epoxy |

## MECHANICAL DATA

|                             |                          |
|-----------------------------|--------------------------|
| <h3>Outline Dimensions</h3> | <h3>PC Board Layout</h3> |
| <h3>Wiring Diagram</h3>     |                          |

Dimensions in inches with metric equivalents in parentheses. Tolerance:  $\pm .010$ "

## INSTALLATION

- When mounting the relays side by side, provide a space equivalent to the width of a single SSR between two adjacent SSRs. Otherwise, reduce the load current flow to 1/2 to 1/3 of the rated current.

## PRECAUTIONS

- Before connecting a load that generates a high surge current, such as a lamp load to the SSR, make sure that the SSR can withstand the surge current of the load.
- The product data sheet shows the non-repetitive peak value of the surge current that flows through the SSR. Normally, use 1/2 of the non-repetitive peak surge current as the standard value. If a surge current exceeding that value is expected, connect a quick-blowing fuse to protect the SSR.



**AMERICAN ZETTLER, INC.**

[www.azettler.com](http://www.azettler.com)

75 COLUMBIA • ALISO VIEJO, CA 92656 • PHONE: (949) 831-5000 • FAX: (949) 831-8642 • E-MAIL: SALES@AZETTLER.COM

1/11/06W

# SGX-41F

## CHARACTERISTIC CURVES

Figure 1 Maximum load current vs. ambient temperature



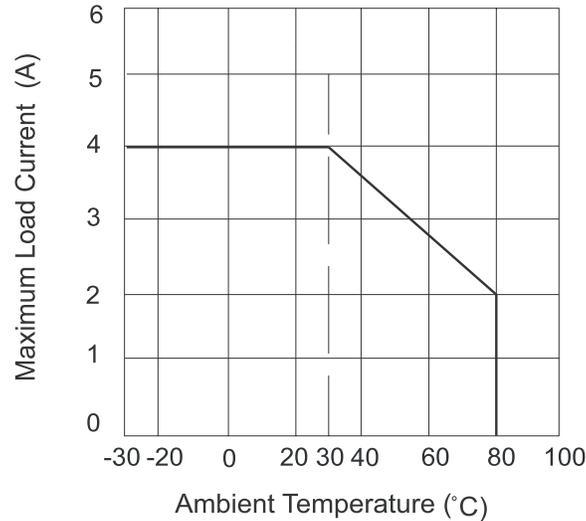


Figure 2 Maximum permissible non-repetitive peak surge current vs. Number of cycles

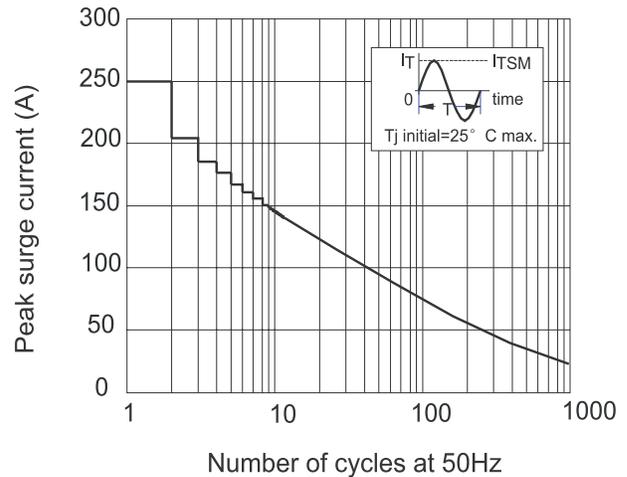

TRIAC AC switch output Maximum permissible non-repetitive peak surge current vs. Number of cycles

SCR AC switch Output Maximum permissible non-repetitive peak surge current vs. Number of cycles

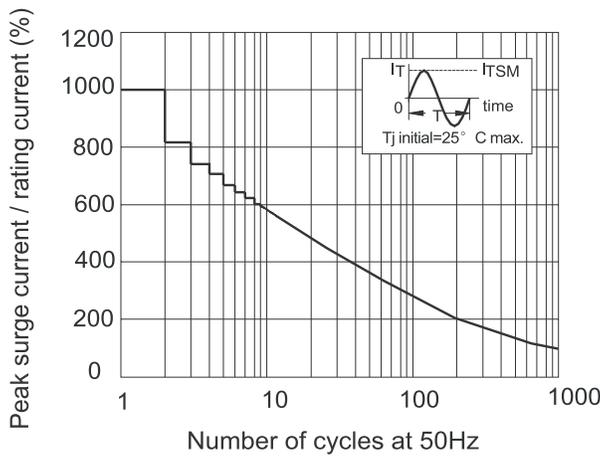

**AMERICAN ZETTLER, INC.**

[www.azettler.com](http://www.azettler.com)

75 COLUMBIA • ALISO VIEJO, CA 92656 • PHONE: (949) 831-5000 • FAX: (949) 831-8642 • E-MAIL: SALES@AZETTLER.COM