

COMPACT SIZE PANEL MOUNT INDICATOR, NON-RELAMPABLE NEON AND INCANDESCENT TECHNOLOGY MOUNTING HOLE, Ø 0.310"

PART NO.	LENS COLOR	VOLTAGE	CURRENT [mA]	RATED LIFE HOURS
NEON 115VAC SERIES				
WL-2150SA1	RED	105-125VAC	1.5mA	25,000
WL-2150SA2	CLEAR	105-125VAC	1.5mA	25,000
WL-2150SA3	AMBER	105-125VAC	1.5mA	25,000
WL-2152SA5	GREEN	105-125VAC	1.5mA	25,000
WL-2152SA6	BLUE	105-125VAC	1.5mA	25,000
NEON 230VAC SERIES				
WL-2151SA1	RED	208-250VAC	1.5mA	25,000
WL-2151SA2	CLEAR	208-250VAC	1.5mA	25,000
WL-2151SA3	AMBER	208-250VAC	1.5mA	25,000
WL-2153SA5	GREEN	208-250VAC	1.5mA	25,000
WL-2153SA6	BLUE	208-250VAC	1.5mA	25,000
INCANDESCENT 12V SERIES				
WL-2194SA1-12V	RED	12V-14V	80mA	25,000
WL-2194SA2-12V	CLEAR	12V-14V	80mA	25,000
WL-2194SA3-12V	AMBER	12V-14V	80mA	25,000
WL-2194SA5-12V	GREEN	12V-14V	80mA	25,000
INCANDESCENT 28V SERIES				
WL-2194SA1-28V	RED	24V-28V	40mA	25,000
WL-2194SA2-28V	CLEAR	24V-28V	40mA	25,000
WL-2194SA3-28V	AMBER	24V-28V	40mA	25,000
WL-2194SA5-28V	GREEN	24V-28V	40mA	25,000


NOTES

1. Minimum panel thickness 0.030"
2. 6" leads with 1/2" strip are standard
3. Due to compact size, components (resistors, diodes) will be installed in the leads
4. Storage temperature
 T_{STG} : -25°C - +80°C
5. Ambient temperature
 T_A : -20°C - +60°C
6. Voltage tolerance
 V_{OP} : ±10%
7. AC operation only for neon type
8. AC/DC operation for incandescent type
9. Body material
Nylon, white
10. Lens material
Polycarbonate
11. Bezel finish
Chrome
12. Wire gauge
20 AWG
13. Wire strip
1/2"
14. Tinnerman clips available separately

CERTIFICATIONS

RoHS
COMPLIANT

DIMENSIONAL CHARACTERISTICS

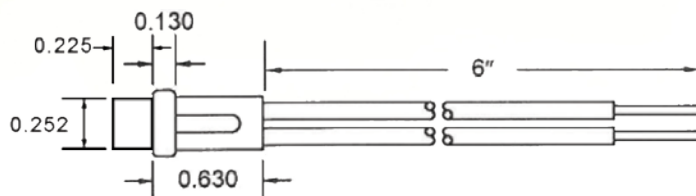

unless otherwise specified, all dimensions are in inches

OPTIONS

Additional options and lens styles available. Please contact Wamco for more information.

