

PANEL MOUNT INDICATOR, NON-RELAMPABLE NEON TECHNOLOGY

MOUNTING HOLE, Ø 0.380"

PART NO.	LENS COLOR	VOLTAGE	CURRENT [mA]	RATED LIFE HOURS
NEON 115VAC SERIES				
WL-6010M1	RED	105-125VAC	1.5mA	25,000
WL-6010M3	AMBER	105-125VAC	1.5mA	25,000
WL-6012M5	GREEN	105-125VAC	1.5mA	25,000
NEON 230VAC SERIES				
WL-6011M1	RED	208-250VAC	1.5mA	25,000
WL-6011M3	AMBER	208-250VAC	1.5mA	25,000
WL-6013M5	GREEN	208-250VAC	1.5mA	25,000

NOTES


1. Recommended panel thickness
0.030" to 0.250"
2. 6" leads with 1/2" strip are standard
3. Storage temperature
 T_{STG} : -25°C - +100°C
4. Ambient temperature
 T_A : -20°C - +100°C
5. Voltage tolerance
 V_{OP} : ±10%
6. Body material
Nylon, white
7. Lens material
Polycarbonate
8. Bezel material
Stainless steel
9. Wire gauge
18 AWG
10. Gaskets
Buna-N
11. Mounting hardware (nut, lock washer, and gasket) included

CERTIFICATIONS

UL (E340667), RoHS



DIMENSIONAL CHARACTERISTICS

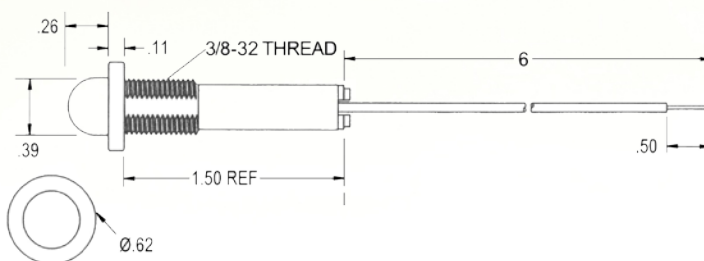

unless otherwise specified, all dimensions are in inches



- ▶ Splash proof
- ▶ Outdoor applications
- ▶ NEMA 3-R

OPTIONS

Additional options and lens styles available. Please contact Wamco for more information.

