## **ZCS1-120**

#### WATER RESISTANT SOLENOID

#### **FEATURES**

- Water resistant
- Capable of handling low and high current requirements
- Versatile mounting and termination

#### ORDERING INFORMATION

ZCS1-120 A 1 DC6V C 1 1 1 1 2 3 4 5 6 7 8

- 1. Part number: ZCS1-120
- 2. Contact arrangement: A: 1A (SPNO)
- 3. Coil termination (15in lb torque spec.)
  - 1. Isolated w/#10-32 terminal (0.22 min. length)
  - 2: Grounded w/#10-32 terminal (0.22 min. length)
  - 3: Isolated w/1/4" Q.C terminal
  - 4: Grounded w/1/4" Q.C terminal
  - 6: Grounded w/#8-32 tapered terminal
  - 7: iSOLATED w/#10-32 terminal (0.45 min. length)
  - 8: Grounded w/#10-32 terminal (0.45 min. length)
- 4. Coil Voltage: 6,12,14,15, 24, 36, 48
- 5. Coil Type:
  - C: Continuous
  - I: Intermittent
- 6. Contact Material and termination (55 in-lb torque spec.):
  - 1: AgCdO with 5/16" -24 terminal (0.38" min. length)
  - 3: Cu with 5/16" -24 terminal (0.38" min. length)
  - 4: Cu with 1/4" -20 terminal (0.50" min length
  - 5: AgCdO with 5/16" -24 terminal (0.50" min. length)
- 7. Mounting Bracket: 1: Standard
  - 2: "L" shaped bracket
- 8. Factory Assigned Special's: (where undefined contact factory)
  - 1: Without hardware
  - 2: Extra hardware loosely mounted to solenoid
  - 5: Zinc plated mounting bracket
  - 7: No hardware, zinc plated mounting bracket

#### **CONTACT DATA**

- Contact Arrangement: 1A (SPNO)
- Contact Material: AgCd0, or Copper
- Termination; 5/16" -24 UNF-2A thread or 1/4" -20 UNC-2A thread

Coil Voltage	Ratings			
(VDC)	Cont. (A)	In-rush (A)	<b>Contact Material</b>	
12	80	400	10000*	Copper
12	100	400	50,000*	AgCdO
36	100	400	25,000*	AgCdO

<sup>\*</sup>Number of operations



#### **COIL PARAMETERS**

- Termination; #8 -32 UNC 2A, #10-32 UNF-2A thread or 1/4" quick connect
- Connections:
  - 1. Coil isolated (two terminals)
  - 2. One coil lead grounded to bracket (one terminal)
- · Coil data:

Coil Voltage (VDC)		Coil Resistance (ohm)		Must-Operate Voltage (VDC)		Coil Power (W)	
Rated	Max	Int.	Cont.	Int.	Cont.	Int.	Cont.
6	6.6	*	4.0	*	4.5		
12	13.2	6.0	16.0	8.04	9.0		
14	15.4	*	26.0	*	10.5		
15	16.5	9.4	23.0	10.05	11.3	24.0	9.0
24	26.4	24.0	64.0	16.08	18.0		
36	39.6	54.0	160.0	24.12	27.0		
48	52.8	*	256.0	*	26.0		


<sup>\*</sup>Special coils available upon request

# **ZCS1-120**

#### **GENERAL DATA**

Dielelectric Strength	500 Volts		
Temperature Range	-20°F~150°F (-28.9°C~65.6°C) - Intermittent		
Temperature hange	-20°F~120°F (-28.9°C~48.9°C) - Continuous		
Mechanical Life (no load)	250,000 cycles		
Mounting position (Recommended)	Plunger vertical with cap down		
Duty Cycle	Continuous; Intermittent: 10sec "on" maximum and minimum 60sec "off". 60sec "on" max and minimum 6min "off."		
Hardward Torque specification	44-55 in*lbs (Contact terminal); 12-18 in*lbs (Coil terminal)		
Weight	170.5 grams		

#### **MECHANICAL DATA**

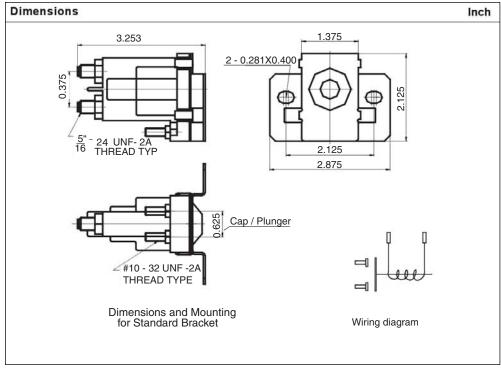

#### **APPLICATION NOTES:**

- 1.) Not all number combinations are available. Please contact your Sales Representative for available part numbers.
- 2.) Solenoid applied in battery charging circuits should be protected from higher than rated voltage during charging. The service life may be affected by this condition and the solenoid may or may not operate the circuit as intended.
- 3.) Circuits should be designed to provide safe operation should the solenoid fail in either the open or closed position.
- 4.) A back-up wrench must be used to hold the bottom nut stationary during installation.

AMERICAN ZETTLER, INC.

www.azettler.com

# ZCS1-70/71

#### HIGH CURRENT SOLENOIDS

#### **FEATURES**

- High current handling capability
- · Isolated or grounded coils
- Enclosed in dust-resistant case



#### **ORDERING INFORMATION**

ZCS1-70 A 1 DC6V C 2

1. Series Number: ZCS1-70, ZCS1-71

**2. Contact Form:**  $\underline{A} = 1A$  (SPNO);  $\underline{C} = 1C$  (SPDT)

3. Coil Termination:

1. = Isolated coil, Ag contacts

2. = Coil grounded to case, all Ag contacts

3. = Isolated coil, Cu NO & Ag NC contacts

 $\underline{4.}$  = Coil grounded to case, Cu NO & Ag NC

contacts

5. = Coil common to NO, Cu NO & Ag NC contacts

4. Coil Voltage: DC6V; DC12V; DC18V;

DC24V; DC36V

**5. Coil Type:**  $\underline{C}$  = Continuous

6. Hardware:

2. Hardware loosely assembled

5. Hardware bulk packed

7. No Hardware included

#### **COIL PARAMETERS**

- Termination; #10-32 UNF 2A thread
- Connections:
  - 1. Coil isolated (two terminals)
  - 2. One coil lead grounded to case (one terminal)
  - 3. One coil lead common to NO terminal marked "BAT" (one terminal)
- · Coil data:

Part	Coil Voltage (VDC)		Coil Resistance (ohm)		Must-Operate Voltage (VDC)		Coil Power (W)	
	Rated	Max	Int.	Cont.	Int.	Cont.	Int.	Cont.
	6	6.6	1.5	4.0	4.02	4.5	23	9
	12	13.2	6.2	16.0	8.04	9.0		
ZCS1-70	18	19.8	20.3	37.4	12.06	13.5		
	24	26.4	23.9	60.4	16.08	18.0		
	36	39.5	60.4	114.0	24.12	27.0		
	6	6.6	1.4	3.5	4.02	4.5	25	10
	12	13.2	4.9	13.5	8.04	9.0		
ZCS1-71	18	19.8	13.5	38.0	12.06	13.5		
	24	26.4	20.1	57.1	16.08	18.0		
	36	39.8	57.1	131.0	24.12	27.0		

#### **CONTACT DATA**

Contact Arrangement: 1A (SPNO), 1C (SPDT)

• Contact Material: 1A- Cu or Ag; 1C- Cu and Ag, or all Ag

UL Pending

Part	Coil Voltage (VDC)		Ily Open ntact	Normally Closed Contact		
		Cont. (A)	In-rush (A)	Cont. (A)	In-rush (A)	
	6	80	800	60	100	
ZCS1-70	12	80	400	60	60	
	18, 24 & 36	50	200	30	30	
ZCS1-71	6	80	1000	60	100	
	12	80	500	60	60	
	18, 24 & 36	50	250	30	30	



AMERICAN ZETTLER, INC.


www.azettler.com

# ZCS1-70/71

#### **GENERAL DATA**

Dielelectric Strength	500 Volts		
Temperature Range	-40°F~122°F (-40°C~50°C)		
Mechanical Life (no load)	250,000 cycles		
Electrical Life (rated load)	100,000 cycles		
Mounting position (Recommended)	Plunger vertical with cap down		
	Continuous;		
Duty Cycle	Intermittent: At 10 sec "on" maximum requires minimum of 60 sec "off". With a 60 sec "on" max there is a minimum of 6 min "off."		
Hardward Torque specification	44-55 in-lbs (Contact terminal); 12-18 in-lbs (Coil terminal)		
Weight	398g (ZCS1-70); 483g (ZCS1-71)		

#### **MECHANICAL DATA**

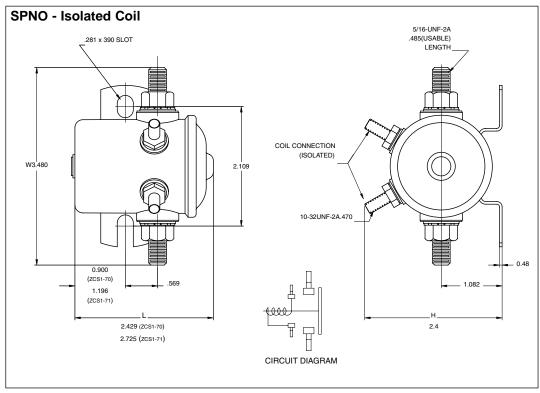


#### **APPLICATION NOTES:**

- 1.) Not all number combinations are available. Please contact your Sales Representative for available part numbers.
- 2.) Solenoid applied in battery charging circuits should be protected from higher than rated voltage during charging. The service life may
- be affected by this condition and the solenoid may or may not operate the circuit as intended.
- 3.) Circuits should be designed to provide safe operation should the solenoid fail in either the open or closed position.
- 4.) A back-up wrench must be used to hold the bottom nut stationary during installation.



### AMERICAN ZETTLER, INC.

# **ZCS1-70/71**

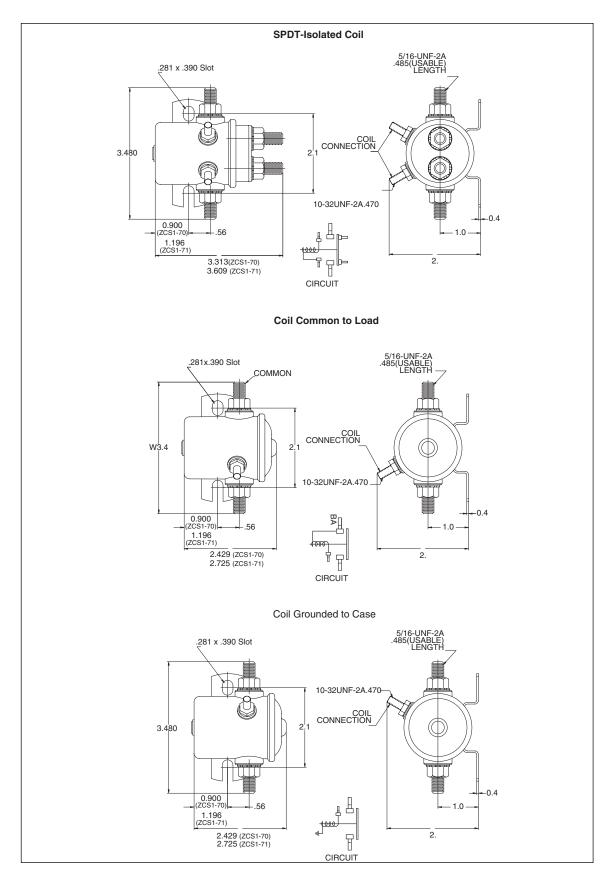



### AMERICAN ZETTLER, INC.