


AZ2250

30 AMP MINIATURE POWER RELAY

FEATURES

- 1 Form A, B and C contacts available
- AC and DC coils available
- High dielectric strength version available
- Epoxy sealed versions available
- UL Class F (155°C) standard
- UL, CUR file E44211
- VDE 40049064 (DC coil only)



CONTACTS

Arrangement	SPST (1 Form A, or B) SPDT (1 Form C)
Ratings	Resistive load: Max. switched power: 1100 W or 7200 VA Max. switched current: 30 A (Form A) 15 A (Form B) Max. switched voltage: 250 VAC, 110 VDC
UL, CUR	1 Form A 30 A at 277 VAC, General Use [1][2] 28 A at 277 VAC, General Use, 100k cycles [1] 2 Hp at 250 VAC [1][2] 1 HP at 125 VAC [1][2] 30 A at 28 VDC [1] 20/60 (FLA/LRA) at 277 VAC 30k cycles [1] 1 Form B 15 A at 277 VAC, General Use [1] 10 A at 28 VDC [1] 0.5 HP at 250 VAC [1] 0.25 HP at 125 VAC [1] 10/33 (FLA/LRA) at 277 VAC 30k cycles [1] 1 Form C 30/20 A (N.O./N.C.) at 277 VAC, General Use [1][2] 20/10 A (N.O./N.C.) at 28 VDC[1] 2/0.5 HP (N.O./N.C.) at 250 VAC[1][2] 1/0.25 HP (N.O./N.C.) at 125 VAC[1][2] 20/60 (FLA/LRA) at 277 VAC 30k cycles N.O. [1] 10/33 (FLA/LRA) at 277 VAC 30k cycles N.C. [1]
VDE	Contact factory for ratings.
Material	Silver cadmium oxide [1], silver tin oxide [2]
Resistance	< 50 milliohms initially (24 V, 1 A voltage drop method)

COIL

Power	
At Pickup Voltage (typical)	DC: 500 mW AC: 1.4 VA
Max. Continuous Dissipation	DC: 1.7 W at 20°C AC: 2.7 VA at 20°C
Max. Temperature	155°C (311°F)

GENERAL DATA

Life Expectancy	Minimum operations
Mechanical	1 x 10 ⁷
Electrical	1 x 10 ⁵ at 30 A 120 VAC Res.
Operate Time	15 msec max. at nominal coil voltage
Release Time	10 msec max. at nominal coil voltage (without suppression)
Dielectric Strength (at sea level for 1 min.)	1500 Vrms contact to contact 2500 Vrms contact to coil 4000 Vrms contact to coil "T" version
Insulation Resistance	1000 megohms min. at 20°C, 500 VDC 50% RH
Dropout	DC: > 10% of nominal coil voltage AC: > 20% of nominal coil voltage
Ambient Temperature	
Operating	-55°C (-67°F) to 85°C (185°F), DC Coils -55°C (-67°F) to 60°C (140°F), AC Coils
Storage	-55°C (-67°F) to 155°C (311°F)
Vibration	0.062" DA at 10–55 Hz
Shock	10 g
Enclosure	P.B.T. polyester
Terminals	Tinned copper alloy, P.C.,
Max. Solder Temp.	270°C (518°F)
Max. Solder Time	5 seconds
Max. Solvent Temp.	80°C (176°F)
Max. Immersion Time	30 seconds
Weight	36 grams

NOTES

1. All values at 20°C (68°F).
2. Relay may pull in with less than "Must Operate" value.
3. Specifications subject to change without notice.

AMERICAN ZETTLER, INC.


AZ2250

RELAY ORDERING DATA

COIL SPECIFICATIONS – DC Coil					ORDER NUMBER*
Nominal Coil VDC	Must Operate VDC	Max. Continuous VDC	Nominal Current mA $\pm 10\%$	Coil Resistance $\pm 10\%$	
3	2.25	3.9	300	10	AZ2250-1A-3DF
5	3.75	6.5	185	27	AZ2250-1A-5DF
6	4.50	7.8	150	40	AZ2250-1A-6DF
9	6.75	11.7	93	90	AZ2250-1A-9DF
12	9.01	15.6	77	160	AZ2250-1A-12DF
15	11.25	19.5	59	250	AZ2250-1A-15DF
18	13.5	23.4	47	360	AZ2250-1A-18DF
24	18.0	31.2	36	640	AZ2250-1A-24DF
48	36.0	62.4	19	2,560	AZ2250-1A-48DF
110	82.50	143	8	13,445	AZ2250-1A-110DF
COIL SPECIFICATIONS – AC Coil 50/60 Hz					ORDER NUMBER*
Nominal Coil VAC	Must Operate VAC	Max. Continuous VAC	Nominal Coil Power VA	Coil Resistance $\pm 10\%$	
12	9	15.6	2.3	25	AZ2250-1A-12AF
24	18	31.2	2.1	100	AZ2250-1A-24AF
120	90	156	2.3	2,500	AZ2250-1A-120AF
220	165	286	2.2	13,490	AZ2250-1A-220AF

*Substitute "-1B" or "-1C" in place of "-1A" for 1 Form B or 1 Form C respectively. For silver tin oxide contacts substitute "-1AE" or "-1CE" in place of "-1A" or "-1C." Add "T" to "-1A", "-1AE", "-1B", "-1C" or "-1CE" for extended life contacts. Substitute "DEF" or "AEF" in place of "DF" or "AF" for epoxy sealed version. For 4000 Vrms dielectric strength change "F" to "TF".

MECHANICAL DATA

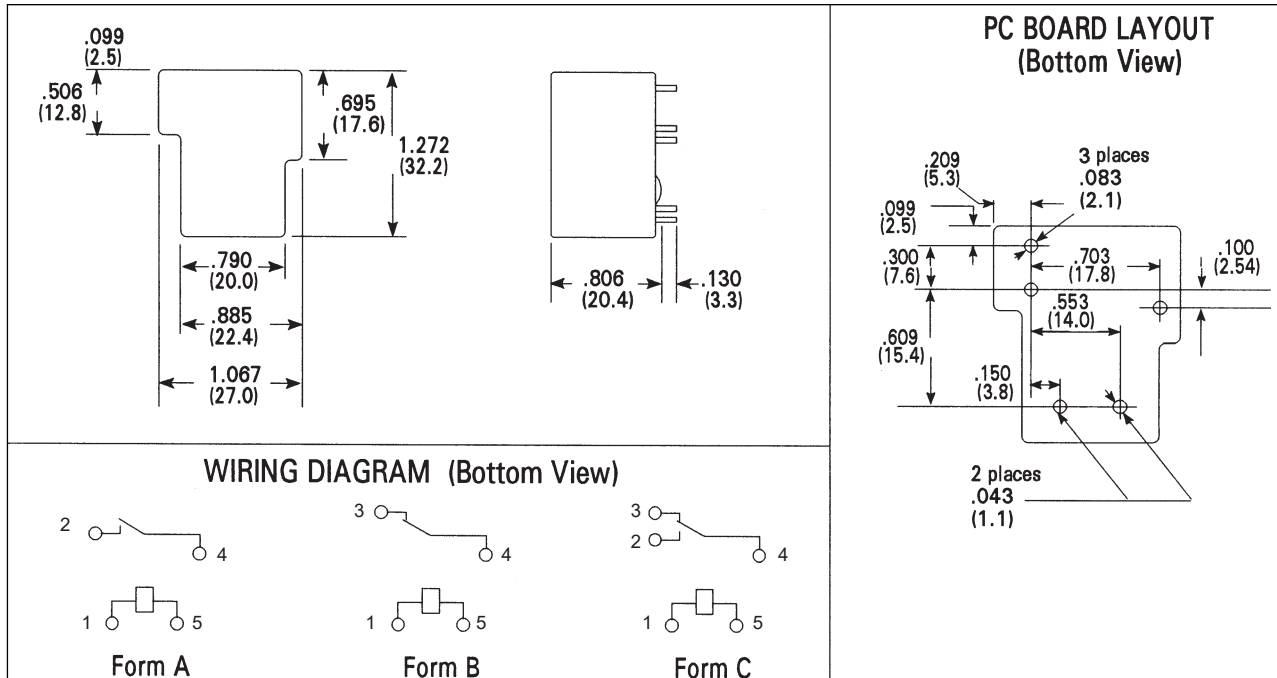

Dimensions in inches with metric equivalents in parentheses. Tolerance: $\pm .010$ "

AMERICAN ZETTLER, INC.

8/10/20

PHONE: (949) 831-5000

www.azettler.com

E-MAIL: SALES@AZETTLER.COM

This specification provides an overview of the most significant part features. Any individual applications and operating conditions are not taken into consideration. It is recommended to test the product under application conditions. Responsibility for the application remains with the customer. Proper operation and service life cannot be guaranteed if the part is operated outside the specified limits.