

AZ951/AZ952

SUBMINIATURE POWER RELAY

FEATURES

- Subminiature size for high density packaging
- Low cost relay, SPDT contact arrangement
- 2 different pinnings available
- 1 Amp, 3 Amp and 5 Amp versions available
- Standard and sensitive coils up to 24 VDC available
- Sensitive coils with low pickup power of 116 mW
- Epoxy sealed
- Life expectancy of up to 10 million operations
- UL, CUR file E43203



CONTACTS

Arrangement	SPDT (1 Form C)
Ratings (max.) (resistive load)	
Light duty version	
switched power	30 W or 125 VA
switched current	1 A
switched voltage	60 VDC* or 220VAC
Medium duty version	
switched power	90 W or 375 VA
switched current	3 A
switched voltage	60 VDC* or 220VAC
Heavy duty version	
switched power	150 W or 625 VA
switched current	5 A
switched voltage	60 VDC* or 220VAC

* Note: If switching voltage is greater than 30 VDC, special precautions must be taken. Please contact the factory.

UL Rated Loads

Light duty version	1 A at 125 VAC 1 A at 30 VDC
Medium duty version	3 A at 125 VAC 3 A at 30 VDC 270 VA, 125 VAC, Pilot Duty, 30k cycles (N.O.), 6k cycles (N.C.)
Heavy duty version	5 A at 125 VAC 5 A at 30 VDC

Contact materials

Light duty version	Silver (Ag + Au), gold plated
Medium duty version	Silver (Ag + Au), gold plated
Heavy duty version	Silver nickel (AgNi + Au), gold plated

Initial resistance ≤ 50 mΩ

NOTES

1. All values at 20°C (68°F).
2. Relay may pull in with less than "Must Operate" value.
3. Specifications subject to change without notice.

GENERAL DATA

Life Expectancy	(minimum operations)
mechanical	1×10^7
electrical	1×10^5 at 3 A 120 VAC resistive
Operate Time	5 ms (typ.) at nominal coil voltage
Release Time	1 ms (typ.) at nominal coil voltage, without coil suppression
Dielectric Strength	(at sea level for 1 min.) 1000 V _{RMS} coil to contact 500 V _{RMS} between open contacts
Insulation Resistance	1000 MΩ (min.) at 20°C, 500 VDC, 50% RH
Temperature Range	(at nominal coil voltage)
operating	
standard coil versions	-25°C (-13°F) to 60°C (149°F)
sensitive coil versions	-25°C (-13°F) to 85°C (185°F)
Vibration resistance	1.5 mm (0.062") DA at 10–55 Hz
Shock	10 g operating
Enclosure	P.B.T. polyester
Terminals	Tinned copper alloy, P. C.
Soldering	
Max. Temperature	270°C (518°F)
Max. Time	5 seconds
Cleaning	
Max. Solvent Temp.	80°C (176°F)
Max. Immersion Time	30 seconds
Dimensions	
length	15.75 mm (0.620")
width	10.75 mm (0.423")
height	11.81 mm (0.465")
Weight	3.5 grams (approx.)
Packing unit in pcs	25 per plastic tray / 2000 per carton box
Compliance	UL 508, RoHS

AZ951/AZ952

COIL

Nominal coil DC voltages	see coil voltage specifications tables
Dropout	≥ 10% of nominal coil voltage
Power	(typ.)
nominal	
standard coil	450 mW
sensitive coil	200 mW
at pickup voltage	
standard coil	253 mW
sensitive coil	113 mW
Temperature Rise	(at nominal coil voltage)
standard coil	54 K (97°F)
sensitive coil	30 K (54°F)
Max. temperature	Class F insulation - 155°C (311°F)

COIL VOLTAGE SPECIFICATIONS

Standard Coil


Nominal Coil VDC	Must Operate VDC	Max. Continuous VDC	Resistance Ohm ± 10%
3	2.25	3.3	20
5	3.75	5.5	56
6	4.5	6.6	80
12	9.0	13.2	320
18	13.5	19.8	720
24	18.0	26.4	1280

Sensitive Coil - Light and Medium duty versions only

Nominal Coil VDC	Must Operate VDC	Max. Continuous VDC	Resistance Ohm ± 10%
3	2.25	3.3	45
5	3.75	5.5	125
6	4.5	6.6	180
9	6.75	9.9	405
12	9.0	13.2	720
18	13.5	19.8	1620
24	18.0	26.4	2880

ORDERING DATA

AZ95□ - 1C□ - □□ D□ E

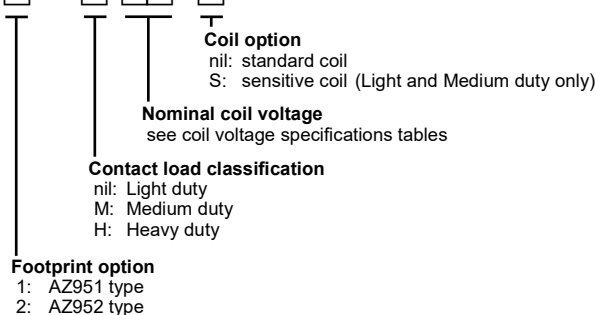


Example ordering data

AZ951-1C-5DE	AZ951, Light duty, 5 VDC coil voltage, standard coil
AZ952-1CM-12DSE	AZ952, Medium duty, 12 VDC coil voltage, sensitive coil
AZ952-1CH-24DE	AZ952, Heavy duty, 24 VDC coil voltage, standard coil



MECHANICAL DATA

Dimensions in inches with metric equivalents in parentheses. Tolerance: ± .010"

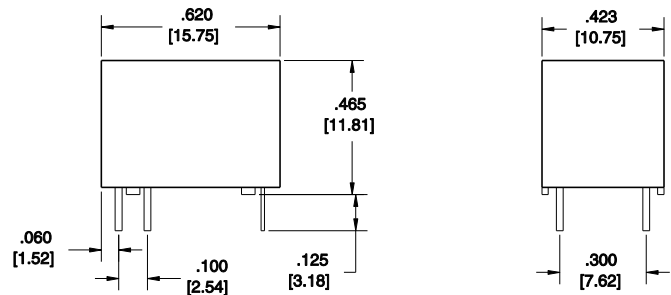


PC BOARD LAYOUT

Viewed towards terminals.

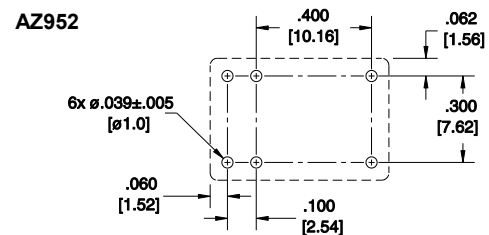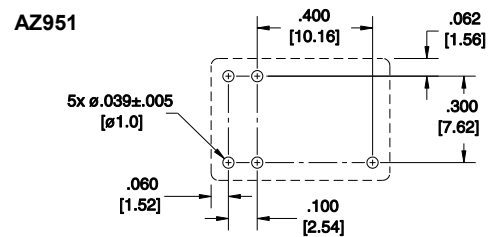

WIRING DIAGRAMS

Viewed towards terminals.

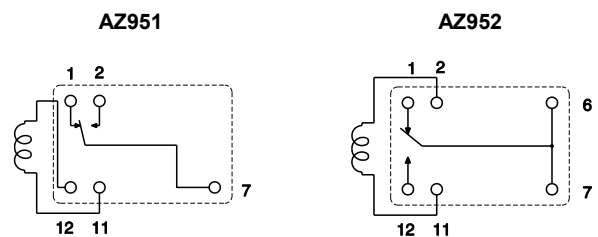

AZ951/AZ952

DISCLAIMER

This product specification is to be used in conjunction with the application notes which can be downloaded from the regional ZETTLER relay websites. The specification provides an overview of the most significant part features. Any individual applications and operating conditions are not taken into consideration. It is recommended to test the product under application conditions. Responsibility for the application remains with the customer. Proper operation and service life cannot be guaranteed if the part is operated outside the specified limits.

ZETTLER GROUP

Building on a foundation of more than a century of expertise in German precision engineering, ZETTLER Group is a world-class enterprise, engaged in the design, manufacturing, sales and distribution of electronic components. Our industry leadership is based on a unique combination of engineering competence and global scale.

For more information on other ZETTLER Group companies, please visit zettler-group.com. For support on this product or other ZETTLER relays, please visit one of the group sites below.

SITES FOR ZETTLER RELAYS

NORTH AMERICA

American Zettler, Inc.
www.azettler.com
sales@azettler.com

EUROPE

Zettler Electronics, GmbH
www.zettlerelectronics.com
office@zettlerelectronics.com

Zettler Electronics, Poland
www.zettlerelectronics.pl
office@zettlerelectronics.pl

CHINA

Zettler Group, China
www.zettlercn.com
relay@zettlercn.com

ASIA PACIFIC

Zettler Electronics (HK) Ltd.
www.zettlerhk.com
sales@zettlerhk.com



ZETTLER