

AZSR126

26 AMP MINIATURE POWER RELAY

FEATURES

- Dielectric strength 4500Vrms
- 31 Amp switching
- Contact gap > 1.8mm
- Clearance / creepage > 6.4 / 7.5mm
- UL, CUR E44211
- VDE pending



CONTACTS

Arrangement	SPST (1 Form A)
Ratings	Resistive load: Max. switched power: 8587VA Max. switched current: 31A Max. switched voltage: 277 VAC
Rated Load UL	26A at 277 VAC, resistive, 75°C, 50k cycles 26A at 250 VAC, resistive, 75°C, 50k cycles 22A at 277 VAC, resistive, 85°C, 100k cycles 22A at 250 VAC, resistive, 85°C, 100k cycles
VDE	31A at 277 VAC, cos phi 0.8, 85°C, 50k cycles * 31A at 250 VAC, cos phi 0.8, 85°C, 50k cycles * 26A at 277 VAC, resistive, 85°C, 50k cycles 26A at 250 VAC, resistive, 85°C, 50k cycles 22A at 277 VAC, resistive, 85°C, 100k cycles 22A at 250 VAC, resistive, 85°C, 100k cycles * duty factor: 0.1 seconds on / 10 seconds off
Material	Silver tin oxide
Resistance	< 100 milliohms initially (at 6V, 1A, voltage drop method)

COIL

Power At Pickup Voltage (typical)	690mW
Max. Continuous Dissipation	2.0W at 20°C (68°F) ambient
Temperature Rise	90°C (194°F) at nominal coil voltage
Temperature	Max. 155°C (311°F)

GENERAL DATA

Life Expectancy Mechanical Electrical	Minimum operations 2 x 10 ⁵ 5 x 10 ⁴ at 26A 250 VAC Res.
Operate Time	20ms max. at nominal coil voltage
Release Time	10ms max. at nominal coil voltage (with no coil suppression)
Dielectric Strength (at sea level for 1 min.)	4500Vrms coil to contact 2500Vrms between open contacts
Insulation Resistance	1000 megaohms min. at 20°C, 500 VDC 50% RH
Holding Voltage	Greater than 35% of nominal coil voltage
Dropout	Greater than 10% of nominal coil voltage
Ambient Temperature Operating	at nominal coil voltage -40°C (-40°F) to 60°C (140°F) at max. 80% of nominal coil voltage -40°C (-40°F) to 85°C (185°F)
Storage	-40°C (-40°F) to 105°C (221°F)
Vibration	1.5mm DA at 10-55 Hz
Shock	20 g
Enclosure	P.B.T. polyester
Terminals	Tinned copper alloy, P.C.
Max. Solder Temp.	260°C (500°F)
Max. Solder Time	5 seconds
Max. Solvent Temp.	80°C (176°F)
Max. Immersion Time	30 seconds
Weight	25 grams

NOTES

1. All values at 20°C (68°F)
2. Relay may pull in with less than "Must Operate" value.
3. Specifications subject to change without notice.

AMERICAN ZETTLER, INC.


8/17/15

AZSR126

RELAY ORDERING DATA

COIL SPECIFICATIONS					
Nominal Coil VDC	Must Operate VDC	Min. Holding VDC	Max. Continuous VDC	Coil Resistance Ohm $\pm 10\%$	ORDER NUMBER
9	6.3	3.2	10.8	58	AZSR126-1AE-9D
12	8.4	4.2	14.4	103	AZSR126-1AE-12D
18	12.6	6.3	21.6	230	AZSR126-1AE-18D
24	16.8	8.4	28.8	410	AZSR126-1AE-24D

MECHANICAL DATA

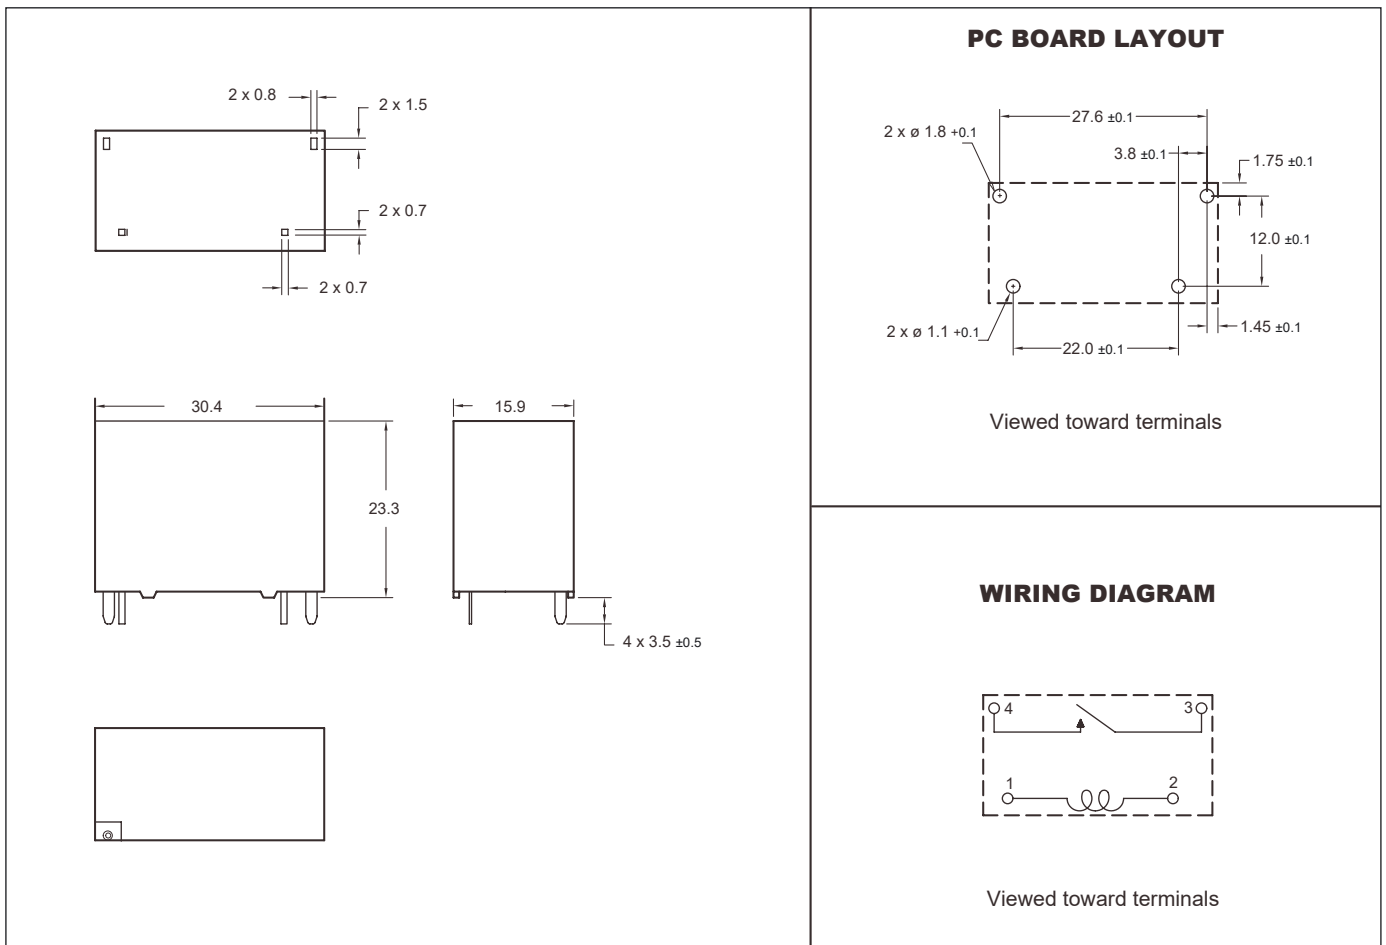

Tolerance: ± 0.3 mm

AMERICAN ZETTLER, INC.

8/17/15

PHONE: (949) 831-5000

www.azettler.com

E-MAIL: SALES@AZETTLER.COM

This specification provides an overview of the most significant part features. Any individual applications and operating conditions are not taken into consideration. It is recommended to test the product under application conditions. Responsibility for the application remains with the customer. Proper operation and service life cannot be guaranteed if the part is operated outside the specified limits.