


Rail Mount Terminal Blocks

NDN63

Inches (Millimeters)

SPECIFICATIONS

Rating: 65A, 600V; UL/CSA
Center spacing: .375" (9.52)
Number of poles: 3
Circuits per foot: 30
Circuit jumper: JN3, 2 circuits
Wire size: AWG #6-18 CU
Screw size: #10-32
Mounting options: 35mm DIN rail, C-rail
Marking tape: MT12-1/2
Torque rating: 35 in/lb max.
Operating temperature: 105°C

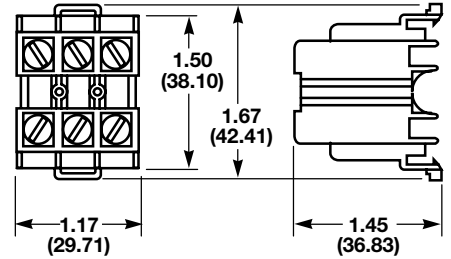


NDN1

Inches (Millimeters)

SPECIFICATIONS

Rating: 90A, 600V
Center spacing: .635" (16.13)
Number of poles: 1
Circuits per foot: 18
Wire size: AWG #2-18 CU
Screw size: 1/4-28
Mounting options: 35mm DIN rail, C-rail
* Dove-tail option is available for mounting side-by-side. Order part no. NDN1-A.
Marking tape: MT12-1/2
Torque rating: 32 in/lb max.
Operating temperature: 105°C

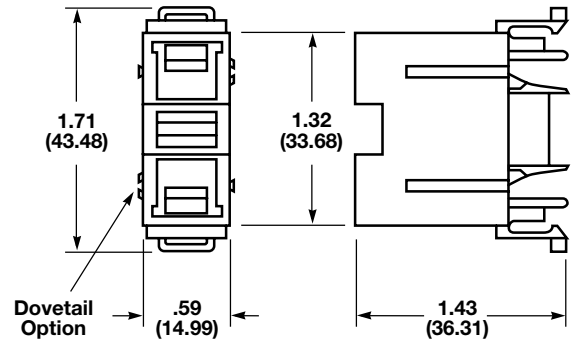

NDN111

Inches (Millimeters)

SPECIFICATIONS

Rating: 90A, 600V; UL/CSA
Center spacing: .635" (16.13)
Number of poles: 3
Circuits per foot: 18
Circuit jumper: JN1, 2 circuits
Wire size: AWG #2-18 CU
Screw size: 1/4-28
Mounting options: 35mm DIN rail, C-rail, Base Mount. * Dove tail option is available for mounting side-by-side. Order part no. NDN111-A.
Marking tape: MT12-1/2
Torque rating: 32 in/lb max.
Operating temperature: 105°C

