



socket **TRAC**

Description

8 and 14 Pin Miniature Sockets, DIN Rail Mountable

Electrical Rating

- 300 Volts, 10 Amps

Construction

- Contacts** • Brass, Nickel Plated
- Screws** • M3 x .5 x 6.5 mm Steel, Zinc Plated, Wire Range #14 - #22 Solid or Stranded
- Molding** • Break Resistant Thermoplastic Black Standard, Grey Available

Agency Approvals

- UL recognized, File No. E60008
- CSA certified, File No. LR29513
- CE
- ROHS




MT Series Ordering Code

Part #	Description	Terminal Type
MT08-PC	DPDT, 8 Pin Miniature	Pressure Clamp Screws
MT14-PC	4PDT, 8 Pin Miniature	Pressure Clamp Screws

Accessories

Part #	Description
	(Refer to the accessories pages 24-31)
C-103-PM	Prepunched Aluminum DIN Rail (1 Meter Lengths)
C-108-PM	Prepunched Raised Aluminum DIN Rail (1 Meter Lengths)
C-108-2PM	Prepunched Raised Aluminum DIN Rail (2 Meter Lengths)
HDB-4	Hold Down Spring

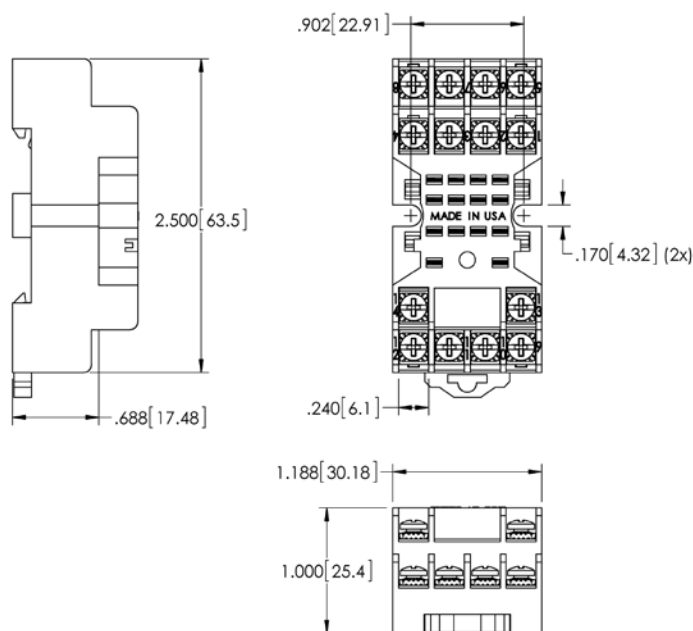

MT Series Note:

MT Series Note: terminals 2, 3, 6, 7, 10 and 11 omitted on DPDT MT08-PC model.

TERMINAL LOCATIONS

