

SS Series Relay Sockets

Description 8 and 11 Pin Square Base Sockets

Electrical Rating

- 300 Volts, 10 Amps
- 150 Volts, 15 Amps

Construction

Contacts • Brass, Nickel Plated

Screws • Binder Head, 6 - 32 x 1/4" Steel, Zinc Plated

• Pressure Clamp, 6 - 32 x 5/16" Steel, Zinc Plated,
Wire Range #12 - #20 Solid or Stranded

Molding • Break Resistant Thermoplastic

Agency Approvals

- UL recognized, File No. E60008
- CSA certified, File No. LR29513
- CE
- ROHS






SS Series Ordering Code

Part #	Description	Terminal Type
SS08-PC	DPDT, 8 Pin Square	Pressure Clamp Screws
SS11-PC	3PDT, 11 Pin Square	Pressure Clamp Screws

Accessories

Part #	Description
	(Refer to the accessories pages 24-31)
HDB-8	Hold Down Spring

TERMINAL LOCATIONS

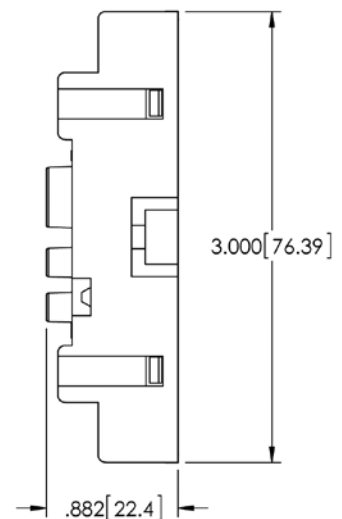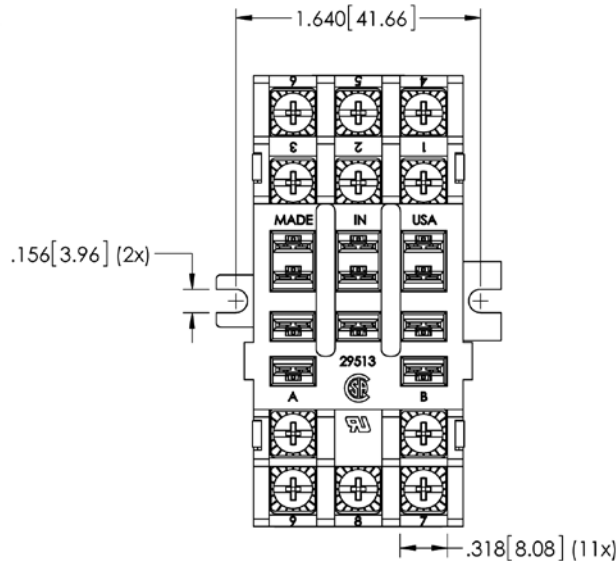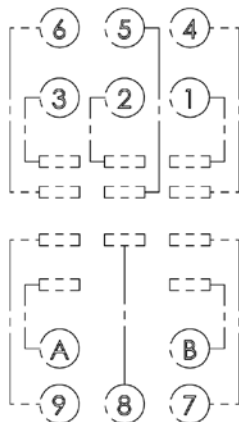

SS Series Note:

Terminals 2, 5 and 8 omitted on DPDT SS08-PC model

