



HALF SIZE CRYSTAL CAN RELAY 5 AMPERE DPDT

FS5-2A-124P

Product Description

A proven variation of our standard half size crystal can relay incorporates improved current carrying paths to provide 5 ampere switching.

The design is supported by our standard qualified military relays and their continued testing programs, together with the latest metallurgical innovations in contact materials and current carrying members. Reliability, product consistency and low cost are maintained through our volume production techniques.

The following construction features ensure the highest reliability in extreme environments:

- All welded relay construction
- Cleaning and sealing techniques ensures maximum internal cleanliness
- 5 amperes switching
- 2 form C, DPDT contacts, special metal alloy with gold plating
- Frame, armature designs and force / mass ratio provides exceptional immunity to shock and vibration.

Series Type

- **FS5-2A-124P** 2 form C, DPDT

Environmental and Physical Specifications

Temperature (Ambient)	- 55°C to + 85°C
Shock	30 g, 6 msec.
Vibration (sinusoidal)	10 g, 500 Hz
Acceleration	30 g
Sealing	All welded, Hermetic
Weight	0,35 oz. (10,0 grams) max.


Electrical Characteristics (over the Temperature range. Unless otherwise noted)

Coil Data	See Typical Characteristics chart		
Contact Rating	Type Load	Contact Load	Cycles min.
(Note: All ratings with grounded case)	Resistive	5 A / 28 Vdc 1 A / 115Vac, 400 Hz	100.000 100.000
Contact Resistance	0,05 Ω max. initial		
Operate Time	5,0 msec. max. at 25°C		
Release Time	3,0 msec. max. at 25°C		
Dielectric Strength	500 Vrms min., 60 Hz, all points, at sea level		
Insulation Resistance	500 MΩ min. all points at 500 Vdc		
Intercontact Capacitance	2,5 pF between contacts		
Sensitivity	725 mW at pick-up, 1,4 W at nominal rated coil voltage, at 25 °C		

Typical Characteristics

Voltage Code	Coil Voltage		Coil Resistance ± 10% at 25°C	Pick-up Vdc Max. at 25°C	Drop-out Vdc Min. at 25°C
	Nominal	Max.			
124	24,0	29,0	400	17,0	1,4


Terminal & Mounting Styles

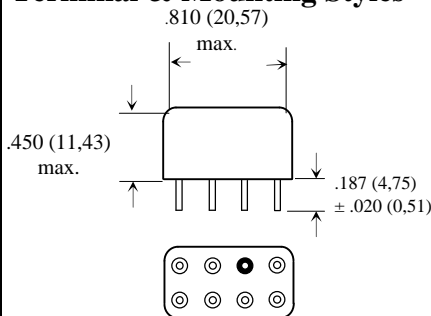

Note:
 - Dimensions are shown in inches (millimetres)
 - Terminal spacing is .200 (5,08). Terminal diameter is .030 (0,76) + .003 (0,08) - .002 (0,05)


Insulating Pad

Relays can be supplied with a insulating pad epoxied to the relay header, to prevent the possible shorting of printed circuit board land lines and to facilitate circuit board cleaning. To order relay with pad add. "P" to Part Number. Example: **FS5-2A-126 P**

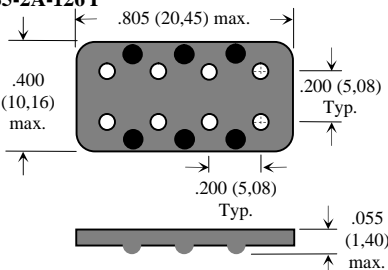

Note:
 -Dimensions are shown in inches (millimetres)

Schematic Diagram



Note:
 - Schematics are viewed from terminals