



RoHS

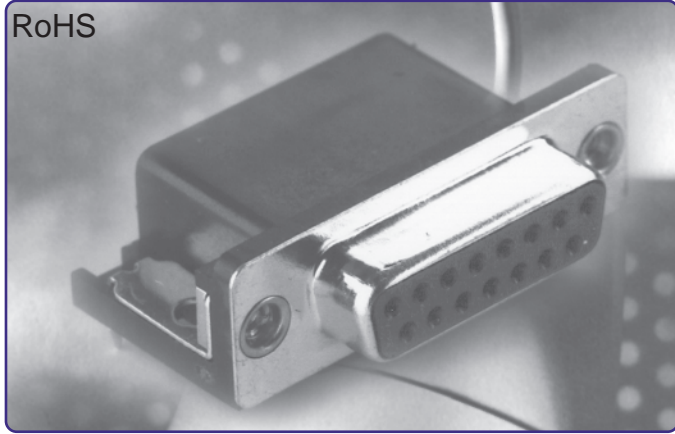

K44X Series Right Angle PCB Mount .590" Footprint

Pictured with Board Lock Option, Dimensions in mm [In]

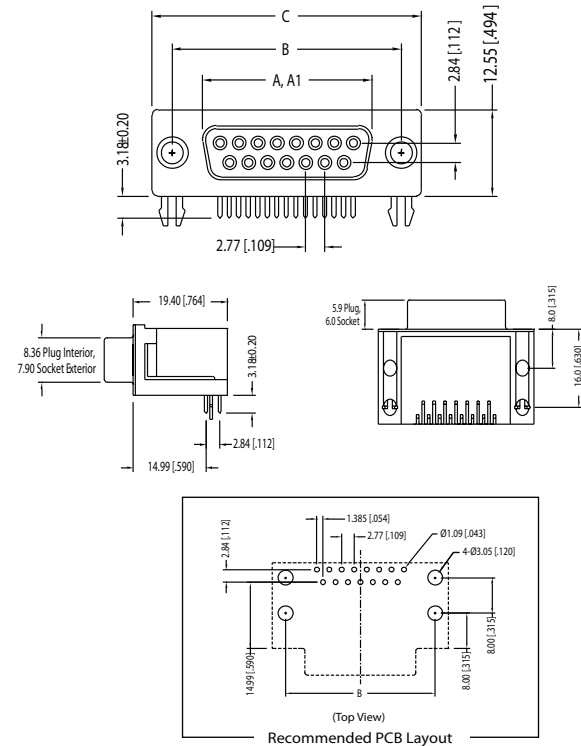

Shell Size	A				A1				B				C			
	In		mm		In		mm		In		mm		In		mm	
9 (E)	±0.10	±0.25	±0.10	±0.25	±0.05	±0.13	±0.15	±0.38	.643	16.33	.666	16.92	.984	24.99	1.213	30.81
15 (A)	.971	24.66	.994	25.25	1.312	33.32	1.541	39.14	.971	24.66	.994	25.25	1.312	33.32	1.541	39.14
25 (B)	1.511	38.38	1.534	38.96	1.852	47.04	2.088	53.04	1.511	38.38	1.534	38.96	1.852	47.04	2.088	53.04
37 (C)	2.159	54.84	2.182	55.42	2.500	63.50	2.729	69.32	2.159	54.84	2.182	55.42	2.500	63.50	2.729	69.32

A = Exterior of Female Shell (S) A1 = Interior of Male Shell (P)

D-SUBMINIATURE CONNECTORS

K44X Series

Documentation & Ordering Information

Kycon Part #

Part Builder

Series	Shell Size	Contact Type	PCB Mounting Options	Front Panel Mounting Options	Plating Option
--------	------------	--------------	----------------------	------------------------------	----------------

Series

K44X - D-Subminiature Connector, Right Angle, PCB Termination, 590 Footprint

Shell Size-Contact Option


- E - 9 Contacts
- A - 15 Contacts
- B - 25 Contacts
- C - 37 Contacts

Contact Type


- P - Pin Contact (Plug)
- S - Socket Contact (Receptacle)

PC Board Mounting Option


P Option




Q Option




T Option



S Option




L Option




Front Panel Mounting Option


Standard J Option




R Option



T Option



JM Option



- Blank - Gold Flash
- 15 - 15µ" Gold
- 30 - 30µ" Gold