


# Product data sheet

Specifications

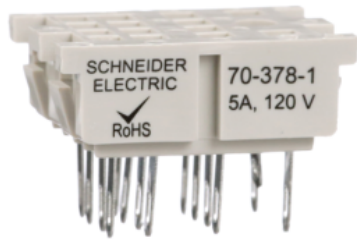

Socket, SE Relays, 5A, 14 pins, solder terminals, separate contact, for 782H / 792 relays

70-378-1

## Main

Product Range	Harmony Electromechanical Relays
Product Type	Socket
Product Compatibility	relay 792XDX relay 782XDXH
Number of Terminals	14
Switch Function	4PDT
Contact Composition	4 C/O

## Complementary

Rated Current	5 A
[Ue] rated operational voltage	120 V
Contact Terminal Arrangement	Mixed
Connections Terminals	Output solder terminalsolid Output solder terminalstranded
Tightening Torque	Chassis 1 N.m, AWG 18, copper
Fixing Mode	By screw, M3.5 chassis
Product Weight	0.22 oz (6.2 g)
Width	0.86 in (21.8 mm)
Depth	2.24 in (57 mm)

## Environment

Ambient Air Temperature for Storage	-40...221 °F (-40...105 °C)
Ambient Air Temperature for Operation	-40...131 °F (-40...55 °C)
Flame Retardance	UL94-V0
Product Certifications	UL CSA CE


## Ordering and shipping details

GTIN	3606480277894
------	---------------

## Offer Sustainability

<b>California proposition 65</b>	WARNING: This product can expose you to chemicals including: Nickel compounds, which is known to the State of California to cause cancer, and Di-isodecyl phthalate (DIDP), which is known to the State of California to cause birth defects or other reproductive harm. For more information go to <a href="http://www.P65Warnings.ca.gov">www.P65Warnings.ca.gov</a>
<b>REACH Regulation</b>	<a href="#">REACH Declaration</a>
<b>REACH free of SVHC</b>	Yes
<b>EU RoHS Directive</b>	Pro-active compliance (Product out of EU RoHS legal scope) <a href="#">EU RoHS Declaration</a>
<b>Toxic heavy metal free</b>	Yes
<b>Mercury free</b>	Yes
<b>RoHS exemption information</b>	<a href="#">Yes</a>
<b>China RoHS Regulation</b>	<a href="#">China RoHS declaration</a>
<b>WEEE</b>	The product must be disposed on European Union markets following specific waste collection and never end up in rubbish bins.


Dimensions

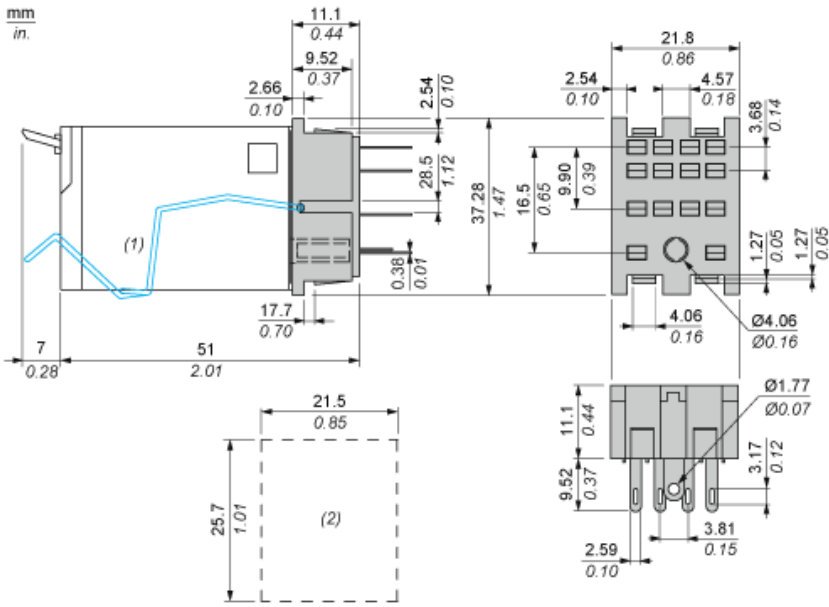

- (1) : Metal hold-down clip
- (2) : Recommended chassis cutout top view

Wiring Diagram

---

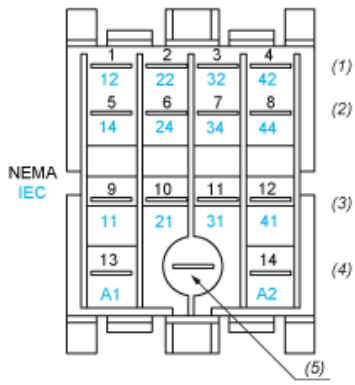

- (1) : N.C.
- (2) : N.O.
- (3) : COM
- (4) : Input
- (5) : Ground lug