

Product data sheet

Specifications



Socket, SE Relays general purpose relay accessory, DPDT, 12A, 300 V, 8 pins, lift terminals, 750/750H series

70-750E8-1

Main

| | |
|-----------------------|--|
| Product Range | Legacy |
| Product Type | Socket |
| Product Compatibility | relay 750XCXR relay 750XCXH diode 70-ASMD suppressor module 70-ASMM signalling device 70-ASMLG suppressor module 70-ASMR jumper wire 16-750CBJ-1 |
| Number of Terminals | 8 |
| Switch Function | DPDT |
| Contact Composition | 2 NO + 2 NC |

Complementary

| | |
|--------------------------------|---|
| Rated Current | 12 A |
| [Ue] rated operational voltage | 300 V |
| Contact Terminal Arrangement | Separate |
| Connections Terminals | lift terminalsflexible lift terminalssolid |
| Tightening Torque | < 0.8 N.m |
| Fixing Mode | By screw M3.5, M3.5 panel Clip-on 35 mm DIN rail |
| Shape of Screw Head | Combination roundhead |
| Product Weight | 3.00 oz (85 g) |
| Width | 1.50 in (38 mm) |
| Depth | 2.24 in (57 mm) |

Environment

| | |
|---------------------------------------|-----------------------------|
| Ambient Air Temperature for Storage | -40...221 °F (-40...105 °C) |
| Ambient Air Temperature for Operation | -40...131 °F (-40...55 °C) |
| IP Degree of Protection | IP20 |
| Flame Retardance | UL94-V0 |
| Product Certifications | UL CSA |

Ordering and shipping details

| | |
|-----------------------|----------------|
| GTIN | 3606480278020 |
| Nbr. of units in pkg. | 1 |
| Package weight(Lbs) | 3.00 oz (85 g) |


Packing Units


| | |
|------------------------------|----------------------|
| Unit Type of Package 1 | PCE |
| Package 1 Height | 2.24 in (57 mm) |
| Package 1 width | 1.50 in (38 mm) |
| Package 1 Length | 2.24 in (57 mm) |
| Unit Type of Package 2 | BB1 |
| Number of Units in Package 2 | 10 |
| Package 2 Weight | 29.98 oz (850 g) |
| Package 2 Height | 3.11 in (7.9 cm) |
| Package 2 width | 3.15 in (8 cm) |
| Package 2 Length | 5.63 in (14.3 cm) |
| Unit Type of Package 3 | CAR |
| Number of Units in Package 3 | 200 |
| Package 3 Weight | 37.48 lb(US) (17 kg) |
| Package 3 Height | 7.48 in (19 cm) |
| Package 3 width | 11.42 in (29 cm) |
| Package 3 Length | 16.14 in (41 cm) |

Offer Sustainability

| | |
|----------------------------|--|
| Sustainable offer status | Green Premium product |
| California proposition 65 | WARNING: This product can expose you to chemicals including: Nickel compounds, which is known to the State of California to cause cancer, and Di-isodecyl phthalate (DIDP), which is known to the State of California to cause birth defects or other reproductive harm. For more information go to www.P65Warnings.ca.gov |
| REACH Regulation | REACH Declaration |
| REACH free of SVHC | Yes |
| EU RoHS Directive | Pro-active compliance (Product out of EU RoHS legal scope) EU RoHS Declaration |
| Toxic heavy metal free | Yes |
| Mercury free | Yes |
| RoHS exemption information | Yes |
| China RoHS Regulation | China RoHS declaration |
| Environmental Disclosure | Product Environmental Profile |
| WEEE | The product must be disposed on European Union markets following specific waste collection and never end up in rubbish bins. |

Approximate Dimensions

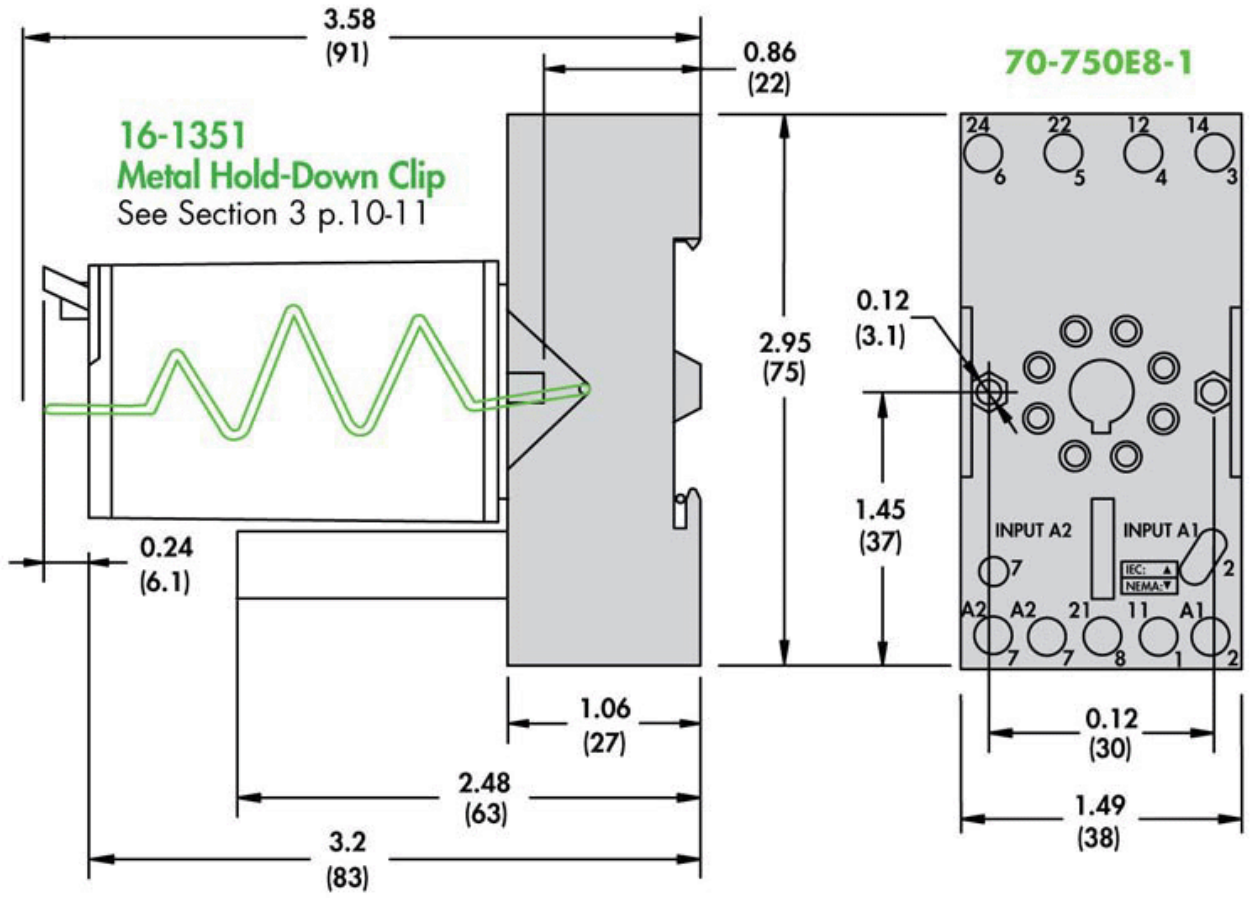



Wiring Diagram
Top View

