


MATERIALS:

- HOUSING-PBT POLYESTER UL94V-0
MIXED GLASS FIBER,
STANDARD COLOR-BLACK
 - CONTACTS-0.35mm THICK PHOS-BRONZE
PLATED WITH HARD GOLD AND
GOLD FLASH IN SOLDER AREA.
 - SHIELD-0.20mm THICK COPPER ALLOY,
PLATED WITH NICKEL.
- CAVITY CONFIRMS TO FCC RULES AND REGULATIONS
PART 68,SUBPART F.

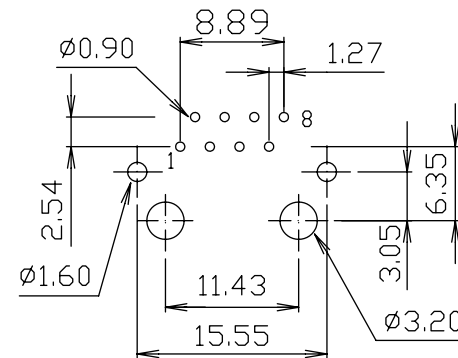

PC Board Layout

Ordering Information

AJT75B	A	8	1	X
Type	Positions (10)	Contacts	Ports	Plating 1 = 6u" 3 = 30u"

<p>Tolerance unless otherwise specified mm</p> <p>.0 ± .25 .00 ± .13 .000 ± .05</p>
--

	<p>P/N: AJT75BA81X</p>
<p>Desc.: Side entry, thru hole, 10P/8C, shielded PCB jack</p>	
<p>Date: 9-22-09</p>	<p>Drawn By: Donna Mears</p>
<p>Dimensions in mm</p>	<p>Verified By: Mike Balekdjian</p>