
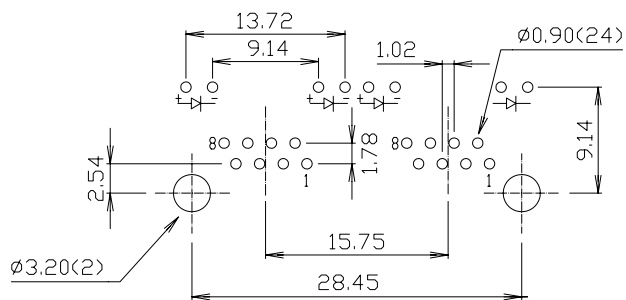


MATERIAL:

- HOUSING-DSM STANYL TE250F6 (NYLON-46)
HEAT DEFLECTION TEMP.290°
BLACK COLOR, UL94V-0
- CONTACTS-0.35mm THICK PHOS-BRONZE PLATED
WITH HARD GOLD AND GOLD FLASH IN
SOLDER AREA.

CAVITY CONFIRMS TO FCC RULES AND REGULATIONS
PART 68,SUBPART F.

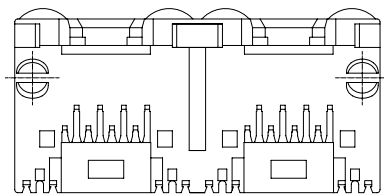

PCB LAYOUT
Ref.

Ordering Information

AJT35L	8	8	2	X-0	X	0
Type	Positions	Contacts	Ports	Plating 1 = 6u" 3 = 30u"	Shields	Tabs 0 = No Shield

	LED1	LED2		LED1	LED2
1 =	Yellow	Green	5 =	Green	Red
2 =	Green	Green	6 =	Red	Green
3 =	Green	Yellow	7 =	Yellow	Yellow
4 =	Green	Orange	8 =	Grn/Ylw	Grn/Ylw
			9 =	Red/Grn	Red/Grn

Tolerance unless otherwise specified
.0 ± 0.25
.00 ± 0.13
.000 ± 0.05

METZ CONNECT	P/N: AJT35L882X-0X0
Desc.: Side entry, unshielded, LED, thru hole modular jack	
Date: 3-4-10	Drawn By: Donna Mears
Dimensions in mm	Verified By: Mike Balekdjian