


MATERIAL:

- HOUSING—PBT POLYESTER UL-94V-0 MIXED GLASS FIBER. STANDARD COLOR—BLACK
- CONTACTS—0.35mm THICK PHOS-BRONZE PLATED WITH HARD GOLD AND GOLD FLASH IN SOLDER AREA.

CAVITY CONFIRMS TO FCC RULES AND REGULATIONS PART 68,SUBPART F.

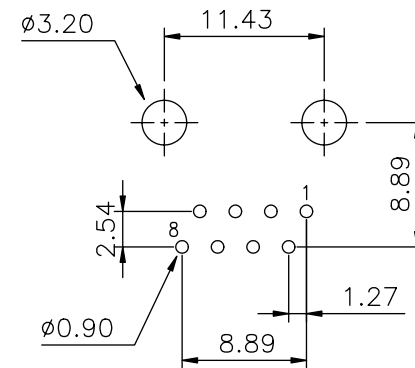

PCB LAYOUT Ref.

Ordering Information

| | | | | |
|--------|-----------|----------|-------|----------|
| AJT84A | 8 | 8 | 1 | X |
| Type | Positions | Contacts | Ports | Plating |
| | | | | 3 = 30u" |
| | | | | 4 = 50u" |

| |
|--|
| <p>Tolerance unless otherwise specified</p> <p>.0 ± .25 .00 ± .13 .000 ± .05</p> |
|--|

| | |
|---|-------------------------------------|
| | <p>P/N: AJT84A881X</p> |
| <p>Desc.: Top entry, thru hole modular jack</p> | |
| <p>Date: 8-31-09</p> | <p>Drawn By: Donna Mears</p> |
| <p>Dimensions in mm</p> | <p>Verified By: Mike Balekdjian</p> |