



- A. Electrical specification (@ 25°C)
1. Power rating; 500mW
 2. Dielectric strength; 500VDC 1 minute
 3. Insulation resistance; 10,000MΩ MIN @ 500VDC
 4. Turns ratio;
(1-5):(6-2)=1CT:1.4CT ±5%
 5. Primary open circuit inductance;
1000μH MIN @ 1KHz, 40mV (1-5)
 6. Primary ET-constant
10.5V-μs MIN
 7. Rise time;
7.3ns MAX
 8. Interwinding capacitance between Primary and Secondary;
32.0pF MAX @ 100KHz
 9. Primary leakage inductance with shorted Secondary;
1.5μH MAX @ 100KHz
 10. DC Resistance;
Primary (1-5) 1.5Ω MAX
Secondary (6-2) 1.5Ω MAX




MODEL NUMBER
G517

- B. Marking;
G517, TAM, date code and country of origin

C. Schematic diagram

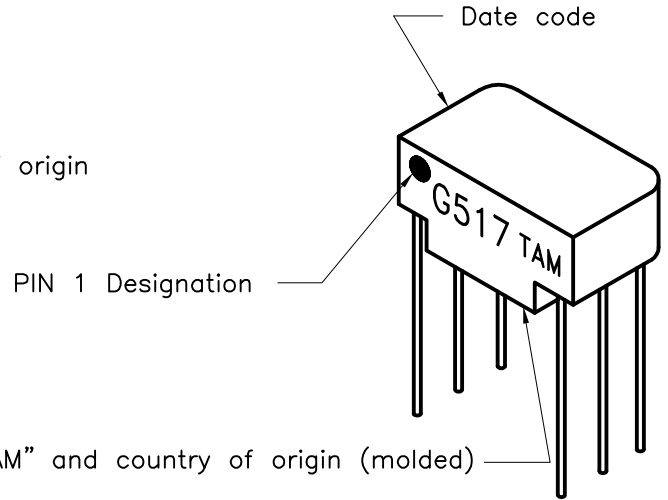

D. Mechanical Specification

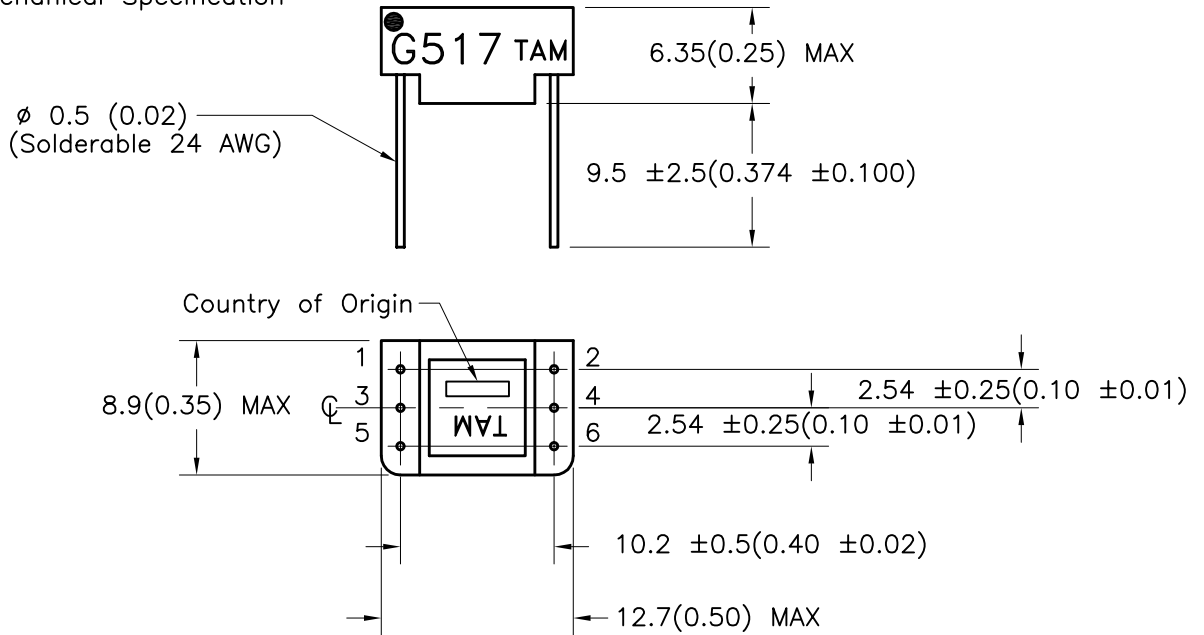

PREPARED BY:

K. BRENNAN

ENGINEER:
M. PITCHAI

DWG CONTROL NO.
P-A1-10854
ACAD\G-SER\A1108541.DWG

REV
C

PULSE
TRANSFORMER

G517

QUALITY CONTROL:
T. CLEM

CONTENTS OF THIS DRAWING ARE
SUBJECT TO CHANGE WITHOUT
PRIOR NOTICE

TAMURA CORPORATION OF AMERICA
43352 BUSINESS PARK DRIVE, TEMECULA, CA. 92590-6624
(951) 699-1270 FAX 9516769482

MODEL SPECIFICATION
DIM: mm(In) SCL: 2/1 SH: 1 OF 1

APPROVED:
Y. SEKIGUCHI

PROPRIETARY NOTICE: THIS DRAWING PRINT OR DOCUMENT AND SUBJECT MATTER DISCLOSED HEREIN ARE PROPRIETARY ITEMS TO WHICH TAMURA RETAINS THE EXCLUSIVE RIGHT OF DISSEMINATION, REPRODUCTION, MANUFACTURE AND SALE. THIS DRAWING, PRINT OR DOCUMENT IS SUBMITTED IN CONFIDENCE FOR CONSIDERATION BY THE RECIPIENT ALONE UNLESS PERMISSION FOR FURTHER DISCLOSURE IS EXPRESSLY GRANTED IN WRITING.

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Tamura:](#)

[G517](#)