



Feed-through terminal, Screw connection, Mounting type: Mounting rail TS 15/5.5, Rated cross-section: 2.5 mm², Width: 5 mm, Colour: Yellow

RAL: 1026

Business data

| | |
|--|-----------------------|
| Article number | 1035.8 |
| Article name | SRK 2,5/15 YE |
| GTIN (EAN) | 4044211007898 |
| Packaging unit | 100 |
| Quantity unit | PC |
| Weight per piece (not including packaging) | 3.4 g |
| Weight per piece (including packaging) | 3.77 g |
| Unit of weight | G |
| Customs number | 85369010 |
| Country of origin | CZ |
| Prio-Article | 1035.2 |
| Product description | Feed-through terminal |

Technical data

Dimensions

| | |
|------------------|---------|
| Length | 26 mm |
| Width | 5 mm |
| Height TS 15/5.5 | 29.5 mm |

Ratings

| | |
|---|---------------------|
| Rated voltage | 500 V |
| Rated current | 24 A |
| Rated cross-section | 2.5 mm ² |
| Rated impulse voltage | 6 kV |
| Overvoltage category | III |
| Contamination degree | 3 |
| Maximum power dissipation for nominal condition | 0.77 W |

Connection data

| | |
|--|---------------------|
| Connection principle | Screw connection |
| Connection position | Lateral |
| Connections | 2 |
| Number of terminals per level | 2 |
| Number of levels | 1 |
| Wire cross-section single-core (rigid) / stranded, min. | 0.2 mm ² |
| Wire cross-section single core (rigid)/stranded, max. | 4 mm ² |
| Wire cross-section stranded, min. | 0.2 mm ² |
| Wire cross-section stranded, max. | 4 mm ² |
| Wire cross-section stranded with wire-end ferrules, min. | 0.2 mm ² |
| Wire cross-section stranded with wire-end ferrules, max. | 2.5 mm ² |
| Wire cross-section AWG, min. | 22 |
| Wire cross-section AWG, max. | 14 |
| Stripping length | 7 mm |
| Screw head | Slotted |
| Screw threading | M 2,5 |
| Tightening torque, min. | 0.4 Nm |
| Tightening torque, max. | 0.8 Nm |

Technical data

Materials

| | |
|---------------------------|---------------|
| Insulation housing | Polyamide 6.6 |
| Flammability class UL 94 | V-2 |
| Working temperature, min. | -40 °C |
| Working temperature, max. | 105 °C |

Further technical data

| | |
|-------------------------------------|-------|
| Mounting type | TS 15 |
| Gauge plug acc. to EN 60 947-1 | A3 |
| Number of cross-connection channels | 1 |
| End plate required | ✓ |

Environmental Product Compliance

| | |
|--------------------------------|------------|
| REACH Conform | yes |
| REACH Reference date | 2022-06-10 |
| REACH Candidate Substance Note | No |
| RoHS Conform | yes |

Approvals

Standards and regulations

| | |
|--------------|----------------|
| EAC approval | TR ZU 004/2011 |
|--------------|----------------|

| | |
|----------------------|-----|
| EAC approval granted | yes |
|----------------------|-----|

CSA approval

| | |
|--------------|--------------|
| CSA approval | C22.2 No 158 |
|--------------|--------------|

| | |
|----------------------|-----|
| CSA approval granted | yes |
|----------------------|-----|

| | |
|-------------------------------|-------|
| CSA Usegroup C: rated voltage | 300 V |
|-------------------------------|-------|

| | |
|-------------------------------|------|
| CSA Usegroup C: rated current | 20 A |
|-------------------------------|------|

| | |
|----------------------------------|----|
| CSA wire cross-section AWG, min. | 22 |
|----------------------------------|----|

| | |
|----------------------------------|----|
| CSA wire cross-section AWG, max. | 14 |
|----------------------------------|----|

| | |
|----------------------|------|
| CSA stripping length | 7 mm |
|----------------------|------|

| | |
|------------------|--------|
| CSA torque, max. | 0.8 Nm |
|------------------|--------|

| | |
|------------------|--------|
| CSA torque, min. | 0.4 Nm |
|------------------|--------|

| | |
|-----------------|--------------|
| CSA File Number | 042110_0_000 |
|-----------------|--------------|

KEMA KEUR approval

| | |
|--------------------|-------------------|
| KEMA KEUR approval | EN 60947-7-1:2009 |
|--------------------|-------------------|

| | |
|----------------------------|-----|
| KEMA KEUR approval granted | yes |
|----------------------------|-----|

| | |
|--------------------|-------|
| KEMA rated voltage | 500 V |
|--------------------|-------|

| | |
|--------------------|------|
| KEMA rated current | 24 A |
|--------------------|------|

| | |
|----------------------------|------|
| KEMA rated impulse voltage | 6 kV |
|----------------------------|------|

| | |
|---|---------------------|
| KEMA wire cross-section single core (rigid), min. | 0.2 mm ² |
|---|---------------------|

| | |
|---|-------------------|
| KEMA wire cross-section single-core (rigid), max. | 4 mm ² |
|---|-------------------|

| | |
|--|---------------------|
| KEMA wire cross-section stranded, min. | 0.2 mm ² |
|--|---------------------|

| | |
|--|-------------------|
| KEMA wire cross-section stranded, max. | 4 mm ² |
|--|-------------------|

| | |
|-------------------|--------|
| KEMA torque, min. | 0.4 Nm |
|-------------------|--------|

| | |
|-------------------|--------|
| KEMA torque, max. | 0.8 Nm |
|-------------------|--------|

German Lloyd approval

| | |
|---------------------------|------------|
| DNV GL Certificate number | TAE000014T |
|---------------------------|------------|

| | |
|-------------------------|---|
| DNV GL Location Classes | Temperature: B, Humidity: B, Vibration: A |
|-------------------------|---|

| | |
|-------------------------|---|
| DNV GL approval granted | 1 |
|-------------------------|---|


| | |
|----------------------------|---------------------|
| DNV GL rated cross-section | 2.5 mm ² |
|----------------------------|---------------------|

| | |
|----------------------|------|
| DNV GL rated current | 26 A |
|----------------------|------|


| | |
|----------------------|-------|
| DNV GL rated voltage | 380 V |
|----------------------|-------|

| | |
|----------------------|--------------------|
| DNV GL test standard | IEC 60947-7-1:2002 |
|----------------------|--------------------|

Media

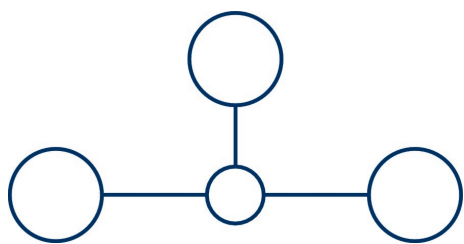

M2.5

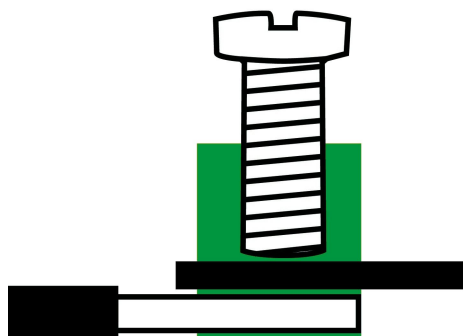

Accessories

End plate



End plate, Width: 1.5 mm, Colour: Beige

| Article number | Article name | GTIN (EAN) | Packaging unit |
|----------------|--------------|---------------|----------------|
| <u>2427.2</u> | AP 2,5/15 BG | 4044211052102 | 50 |

End stop



End stop, Mounting type: Mounting rail TS 15/5.5, Width: 7.5 mm, Colour: Beige

| Article number | Article name | GTIN (EAN) | Packaging unit |
|----------------|--------------|---------------|----------------|
| <u>2074.2</u> | ES 15 BG | 4044211048822 | 50 |

Cross-connector



Cross-connector, No. of poles: 10, Mounting type: Can be screwed on, Width: 49.9 mm, Rated cross-section: 2.5 mm², Colour: natural

| Article number | Article name | GTIN (EAN) | Packaging unit |
|----------------|--------------|---------------|----------------|
| <u>2425.0</u> | Q 10 | 4044211052072 | 10 ST |



Cross-connector, No. of poles: 2, Mounting type: Can be screwed on, Width: 9.1 mm, Rated cross-section: 2.5 mm², Colour: natural

| Article number | Article name | GTIN (EAN) | Packaging unit |
|----------------|--------------|---------------|----------------|
| <u>2422.0</u> | Q 2 | 4044211052041 | 50 ST |



Cross-connector, No. of poles: 3, Mounting type: Can be screwed on, Width: 14.2 mm, Rated cross-section: 2.5 mm², Colour: natural

| Article number | Article name | GTIN (EAN) | Packaging unit |
|----------------|--------------|---------------|----------------|
| <u>2423.0</u> | Q 3 | 4044211052058 | 50 ST |

Cross-connector



Cross-connector, No. of poles: 4, Mounting type: Can be screwed on, Width: 19.3 mm, Rated cross-section: 2.5 mm², Colour: natural

| Article number | Article name | GTIN (EAN) | Packaging unit |
|----------------|--------------|---------------|----------------|
| <u>2424.0</u> | Q 4 | 4044211052065 | 20 ST |

Quick marking



Terminal marker / Pocket Maxicard, Length: 5 mm, Width: 5 mm, Colour: White

| Article number | Article name | GTIN (EAN) | Packaging unit |
|----------------|----------------|---------------|----------------|
| <u>4600.7</u> | PMC SB 5/50 WH | 4044211088903 | 500 ST |


Screwdriver



Screwdriver with bare blade, Colour: Black-grey

| Article number | Article name | GTIN (EAN) | Packaging unit |
|----------------|--------------|---------------|----------------|
| <u>1085.0</u> | SDB 0,5x3,0 | 4044211014643 | 1 ST |

Partition plate



Partition plate, Width: 1.5 mm, Colour: Beige

| Article number | Article name | GTIN (EAN) | Packaging unit |
|----------------|--------------|---------------|----------------|
| <u>2428.2</u> | TW 2,5/15 BG | 4044211052126 | 50 |