

1404.2

SL 4/15 Ex GNYE

SL 4/15 Ex GNYE



Ex protective-earth terminal ATEX-certified Screw connection, Mounting type: Mounting rail TS 15/5.5, Rated cross-section: 4 mm², Width: 7 mm, Colour: Green-yellow

Business data

Product description	Ex protective earthing terminal ATEX-certified
Explosion-proof version (EEx e)	✓
Packaging unit	100
Quantity unit	PC
Weight per piece (not including packaging)	14
Weight per piece (including packaging)	14.48
Unit of weight	G
Customs number	85369010
Country of origin	DE

© CONTA-CLIP Verbindungstechnik GmbH | Otto-Hahn-Str. 7 | D-33161 Hövelhof
 Fon +49 (0) 52 57.98 33-0 | Fax +49 (0) 52 57.98 33-33 | E-Mail info@conta-clip.de | conta-clip.de

Creation date 24.02.2021 01:06:37
 Subject to technical modifications

1404.2

SL 4/15 Ex GNYE

SL 4/15 Ex GNYE

Technical Data

Dimensions

Length	32 mm
--------	-------

Width	7 mm
-------	------

Height TS 15/5.5	34 mm
------------------	-------

Ratings

Rated cross-section	4 mm ²
---------------------	-------------------

Overvoltage category	III
----------------------	-----

Contamination degree	3
----------------------	---

1404.2

SL 4/15 Ex GNYE

SL 4/15 Ex GNYE

Technical Data

Connection data

Connection principle	Screw connection
Connection position	Lateral
Connections	2
Number of terminals per level	2
Number of levels	1
Wire cross-section single-core (rigid) / stranded, min.	0.2 mm ²
Wire cross-section single core (rigid)/stranded, max.	4 mm ²
Wire cross-section stranded, min.	0.2 mm ²
Wire cross-section stranded, max.	4 mm ²
Wire cross-section stranded with wire-end ferrules, min.	0.2 mm ²
Wire cross-section stranded with wire-end ferrules, max.	4 mm ²
Wire cross-section AWG, min.	22
Wire cross-section AWG, max.	10
Stripping length	9 mm
Screw head	Slotted
Screw threading	M 3
Tightening torque, min.	0.5 Nm
Tightening torque, max.	1 Nm

1404.2

SL 4/15 Ex GNYE

SL 4/15 Ex GNYE

Technical Data

Materials

Insulation housing	Polyamide 6.6
--------------------	---------------

Flammability class UL 94	V-2
--------------------------	-----

Working temperature, min.	-40 °C
---------------------------	--------

Working temperature, max.	105 °C
---------------------------	--------

Further technical data

Mounting type	TS 15
---------------	-------

Gauge plug acc. to EN 60 947-1	A3
--------------------------------	----

1404.2

SL 4/15 Ex GNYE

SL 4/15 Ex GNYE

Approvals

Standards and regulations

Partial certification number	NEMKO ATEX 1135 U
EAC approval	TR ZU 004/2011
EAC approval granted	✓

cUL Recognized

cUL Recognized	C22.2 No 158
cUL Recognized	✓
cUL wire cross-section single-core (rigid) AWG, min.	22
cUL wire cross-section single-core (rigid) AWG, max.	10
cUL wire cross-section stranded AWG, min.	22
cUL wire cross-section stranded AWG, max.	10
cUL torque	7 Nm
cUL wire material	Cu

1404.2

SL 4/15 Ex GNYE

SL 4/15 Ex GNYE

Approvals

KEMA KEUR approval

KEMA KEUR approval	EN 60947-7-2
KEMA KEUR approval granted	✓
KEMA wire cross-section single core (rigid), min.	0.2 mm ²
KEMA wire cross-section single-core (rigid), max.	4 mm ²
KEMA wire cross-section stranded, min.	0.2 mm ²
KEMA wire cross-section stranded, max.	4 mm ²

UL Recognized



UL Recognized	UL 1059
UL Recognized granted	✓
UL wire cross-section single-core (rigid) AWG, min.	22
UL wire cross-section single-core (rigid) AWG, max.	10
UL wire cross-section stranded AWG, min.	22
UL wire cross-section stranded AWG, max.	10
UL torque	7 Lb In
UL wire material	Cu
UL factory wiring	✓
UL field wiring	✓

1404.2


SL 4/15 Ex GNYE

SL 4/15 Ex GNYE

Media

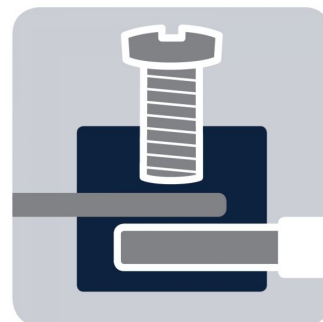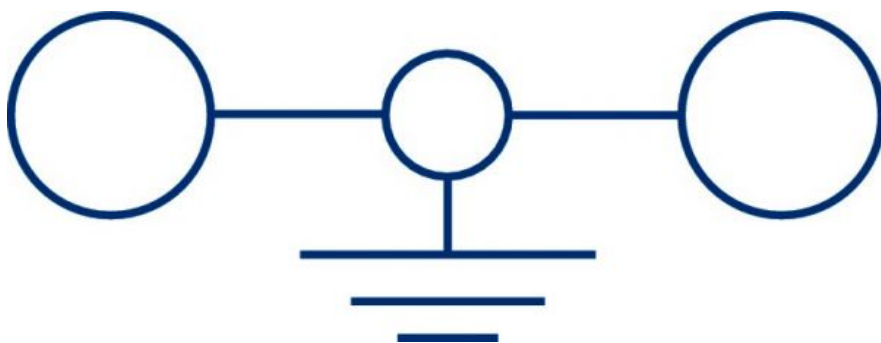

M3

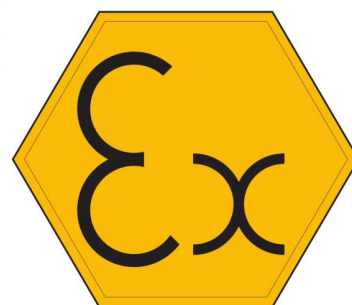

Ex



1404.2

SL 4/15 Ex GNYE

SL 4/15 Ex GNYE

Media




1404.2

SL 4/15 Ex GNYE

SL 4/15 Ex GNYE

Accessories

Quick-marking



Terminal marker / Pocket Maxicard, Length: 5 mm,
Width: 6 mm, Colour: White

In general

Order number	Article designation	GTIN (EAN)	Packaging unit
4702.7	PMC SB 6/50 WH	4044211089986	500 PC

Screw driver



Screwdriver with bare blade, Colour: Black-grey

In general

Order number	Article designation	GTIN (EAN)	Packaging unit
1086.0	SDB 0,6x3,5	4044211014797	1 PC