

1439.2

SL 10/35 Ex GNYE

SL 10/35 Ex GNYE



Ex protective-earth terminal ATEX-certified Screw connection, Mounting type: Mounting rail TS 35/7.5, Rated cross-section: 10 mm<sup>2</sup>, Width: 10 mm, Colour: Green-yellow

## Business data

|  |  |
|--|--|
| Product description                        | Ex protective earthing terminal ATEX-certified |
| Explosion-proof version (EEx e)            | ✓  |
| Packaging unit                             | 80   |
| Quantity unit                              | PC   |
| Weight per piece (not including packaging) | 32.8   |
| Weight per piece (including packaging)     | 34.37  |
| Unit of weight                             | G  |
| Customs number                             | 85369010                                       |
| Country of origin                          | DE   |

1439.2

SL 10/35 Ex GNYE

SL 10/35 Ex GNYE

## Technical Data

---

### Dimensions

---

|        |       |
|--------|-------|
| Length | 56 mm |
|--------|-------|

|       |       |
|-------|-------|
| Width | 10 mm |
|-------|-------|

|                  |       |
|------------------|-------|
| Height TS 35/7.5 | 47 mm |
|------------------|-------|

### Ratings

---

|                     |                    |
|---------------------|--------------------|
| Rated cross-section | 10 mm <sup>2</sup> |
|---------------------|--------------------|

|                      |     |
|----------------------|-----|
| Overvoltage category | III |
|----------------------|-----|

|                      |   |
|----------------------|---|
| Contamination degree | 3 |
|----------------------|---|

1439.2

SL 10/35 Ex GNYE

SL 10/35 Ex GNYE

## Technical Data

---

### Connection data

|  |                     |
|--|---------------------|
| Connection principle                                     | Screw connection    |
| Connection position                                      | Lateral             |
| Connections  | 2                   |
| Number of terminals per level                            | 2                   |
| Number of levels   | 1                   |
| Wire cross-section single-core (rigid) / stranded, min.  | 0.2 mm <sup>2</sup> |
| Wire cross-section single core (rigid)/stranded, max.    | 10 mm <sup>2</sup>  |
| Wire cross-section stranded, min.                        | 0.2 mm <sup>2</sup> |
| Wire cross-section stranded, max.                        | 10 mm <sup>2</sup>  |
| Wire cross-section stranded with wire-end ferrules, min. | 0.2 mm <sup>2</sup> |
| Wire cross-section stranded with wire-end ferrules, max. | 10 mm <sup>2</sup>  |
| Wire cross-section AWG, min.                             | 20                  |
| Wire cross-section AWG, max.                             | 6                   |
| Stripping length   | 12 mm               |
| Screw head   | Slotted             |
| Screw threading  | M 4                 |
| Tightening torque, min.                                  | 1.2 Nm              |
| Tightening torque, max.                                  | 2 Nm                |

1439.2

SL 10/35 Ex GNYE

SL 10/35 Ex GNYE

## Technical Data

---

### Materials

---

|                    |               |
|--------------------|---------------|
| Insulation housing | Polyamide 6.6 |
|--------------------|---------------|

|                          |     |
|--------------------------|-----|
| Flammability class UL 94 | V-2 |
|--------------------------|-----|

|                           |        |
|---------------------------|--------|
| Working temperature, min. | -40 °C |
|---------------------------|--------|

|                           |        |
|---------------------------|--------|
| Working temperature, max. | 105 °C |
|---------------------------|--------|

### Further technical data

---

|               |                         |
|---------------|-------------------------|
| Mounting type | Mounting rail TS 35/7,5 |
|---------------|-------------------------|

|                                |    |
|--------------------------------|----|
| Gauge plug acc. to EN 60 947-1 | A5 |
|--------------------------------|----|

1439.2

SL 10/35 Ex GNYE

SL 10/35 Ex GNYE

## Approvals

---

### Standards and regulations

---

|                              |                   |
|------------------------------|-------------------|
| Partial certification number | NEMKO ATEX 1136 U |
| EAC approval                 | TR ZU 004/2011    |
| EAC approval granted         | ✓                 |
| Nemko approval               | EN 60947-7-2      |
| Nemko approval granted       | ✓                 |

### cUL Recognized

---

|  |              |
|--|--------------|
| cUL Recognized                                       | C22.2 No 158 |
| cUL Recognized                                       | ✓            |
| cUL wire cross-section single-core (rigid) AWG, min. | 20           |
| cUL wire cross-section single-core (rigid) AWG, max. | 6            |
| cUL wire cross-section stranded AWG, min.            | 20           |
| cUL wire cross-section stranded AWG, max.            | 6            |
| cUL torque   | 16 Nm        |
| cUL wire material                                    | Cu           |

1439.2

SL 10/35 Ex GNYE

SL 10/35 Ex GNYE

## Approvals

---

### KEMA KEUR approval

---

|   |                     |
|---|---------------------|
| KEMA KEUR approval                                | EN 60947-7-2        |
| KEMA KEUR approval granted                        | ✓                   |
| KEMA wire cross-section single core (rigid), min. | 0.2 mm <sup>2</sup> |
| KEMA wire cross-section single-core (rigid), max. | 10 mm <sup>2</sup>  |
| KEMA wire cross-section stranded, min.            | 0.2 mm <sup>2</sup> |
| KEMA wire cross-section stranded, max.            | 10 mm <sup>2</sup>  |
| KEMA torque, min.                                 | 1.2 Nm              |
| KEMA torque, max.                                 | 2 Nm                |

### UL Recognized

---

|   |          |
|---|----------|
| UL Recognized                                       | UL 1059  |
| UL Recognized granted                               | ✓        |
| UL wire cross-section single-core (rigid) AWG, min. | 20       |
| UL wire cross-section single-core (rigid) AWG, max. | 6        |
| UL wire cross-section stranded AWG, min.            | 20       |
| UL wire cross-section stranded AWG, max.            | 6        |
| UL torque   | 16 Lb In |
| UL wire material                                    | Cu       |
| UL factory wiring                                   | ✓        |

1439.2

SL 10/35 Ex GNYE

SL 10/35 Ex GNYE

## Approvals

---

### UL Recognized

---

UL field wiring

✓



1439.2

SL 10/35 Ex GNYE

SL 10/35 Ex GNYE

## Media

---

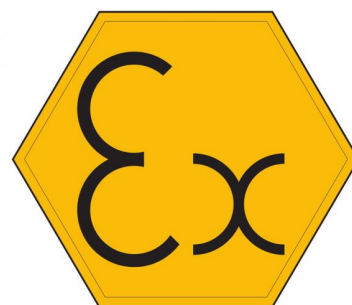

**Ex**





1439.2

SL 10/35 Ex GNYE

SL 10/35 Ex GNYE

Media

---



1439.2

SL 10/35 Ex GNYE


SL 10/35 Ex GNYE

## Accessories

---

### Quick-marking

---

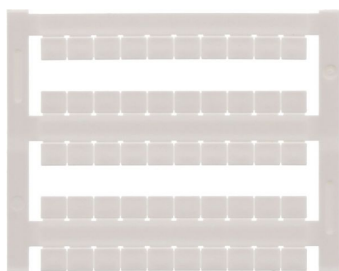

Terminal marker / Pocket Maxicard, Length: 5 mm,  
Width: 6 mm, Colour: White

### In general

| Order number | Article designation | GTIN (EAN)    | Packaging unit |
|--------------|---------------------|---------------|----------------|
| 4702.7       | PMC SB 6/50 WH      | 4044211089986 | 500 PC         |

---

### Screw driver

---



Screwdriver with bare blade, Colour: Black-grey

### In general

| Order number | Article designation | GTIN (EAN)    | Packaging unit |
|--------------|---------------------|---------------|----------------|
| 1087.0       | SDB 0,8x4,0         | 4044211014803 | 1 PC           |

---