



17042.2

SIK 10/ST BG

SIK 10/ST BG

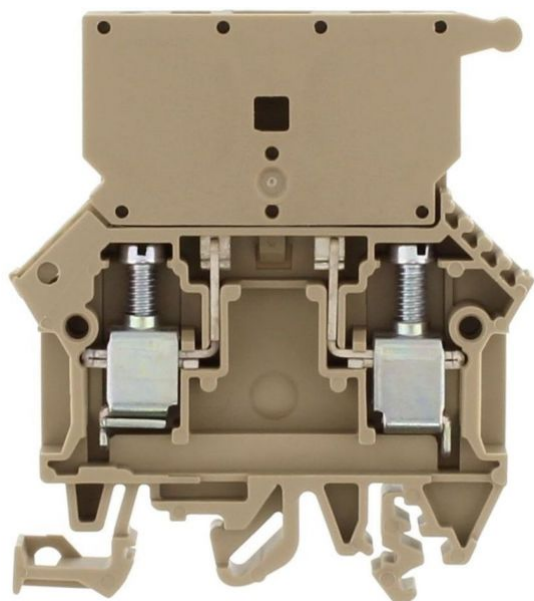

M4

EAC



Nemko

US

Fused terminal, Screw connection, Mounting type: Mounting rail TS 35/7.5 and TS 32, Rated cross-section: 10 mm², Width: 8 mm, Colour: Beige

Business data

Product description	fused terminal
Packaging unit	25
Quantity unit	PC
Weight per piece (not including packaging)	25.2
Weight per piece (including packaging)	27.8
Unit of weight	G
Customs number	85369010
Country of origin	DE

17042.2

SIK 10/ST BG

SIK 10/ST BG

Technical Data

Dimensions

Length	60 mm
--------	-------

Width	8 mm
-------	------

Height TS 35/7.5	73 mm
------------------	-------

Height TS 32	69 mm
--------------	-------

Ratings

Rated voltage (determined by the illuminated display and fuse being used)	500 V
---	-------

Rated current (as fuse-disconnect terminal)	10 A
---	------

Rated cross-section	10 mm ²
---------------------	--------------------

Rated impulse voltage	8 kV
-----------------------	------

Overvoltage category	III
----------------------	-----

Contamination degree	3
----------------------	---

17042.2

SIK 10/ST BG

SIK 10/ST BG

Technical Data

Connection data

Connection principle	Screw connection
Connection position	Lateral
Connections	2 / disconnect-plug
Number of terminals per level	2
Number of levels	1
Wire cross-section single-core (rigid) / stranded, min.	0.2 mm ²
Wire cross-section single core (rigid)/stranded, max.	10 mm ²
Wire cross-section stranded, min.	0.2 mm ²
Wire cross-section stranded, max.	10 mm ²
Wire cross-section stranded with wire-end ferrules, min.	0.2 mm ²
Wire cross-section stranded with wire-end ferrules, max.	10 mm ²
Wire cross-section AWG, min.	22
Wire cross-section AWG, max.	8
Stripping length	12 mm
Screw head	Slotted
Screw threading	M 4
Tightening torque, min.	1.2 Nm
Tightening torque, max.	2 Nm

17042.2

SIK 10/ST BG

SIK 10/ST BG

Technical Data

Materials

Insulation housing	Polyamide 6.6
--------------------	---------------

Flammability class UL 94	V-2
--------------------------	-----

Working temperature, min.	-40 °C
---------------------------	--------

Working temperature, max.	105 °C
---------------------------	--------

Further technical data

Mounting type	Mounting rail TS 35/7.5 and TS 32
---------------	-----------------------------------

Fuse size	5 x 20 / 5 x 25 / 5 x 30 mm
-----------	-----------------------------

Gauge plug acc. to EN 60 947-1	A5
--------------------------------	----

End plate required	✓
--------------------	---

Voltage fuse	250 V
--------------	-------

Version of fuse holder	Swivelling
------------------------	------------

Version of fuse cartridge	G fuse 5x20 / 5x25 / 5x30
---------------------------	---------------------------

17042.2

SIK 10/ST BG

SIK 10/ST BG

Approvals

Standards and regulations

EAC approval	TR ZU 004/2011
--------------	----------------

EAC approval granted	✓
----------------------	---

Nemko approval	EN 60947-7-3
----------------	--------------

Nemko approval granted	✓
------------------------	---

cUL Recognized

cUL Recognized	C22.2 No 158
----------------	--------------

cUL Recognized	✓
----------------	---

cUL Usegroup B: rated voltage	600 V
-------------------------------	-------

cUL Usegroup B: rated current	10 A
-------------------------------	------

cUL Usegroup C: rated voltage	600 V
-------------------------------	-------

cUL Usegroup C: rated current	10 A
-------------------------------	------

cUL wire cross-section single-core (rigid) AWG, min.	22
--	----

cUL wire cross-section single-core (rigid) AWG, max.	12
--	----

cUL wire cross-section stranded AWG, min.	22
---	----

cUL wire cross-section stranded AWG, max.	12
---	----

cUL torque	16 Nm
------------	-------

cUL wire material	Cu
-------------------	----

17042.2

SIK 10/ST BG

SIK 10/ST BG

Approvals

German Lloyd approval

GL approval	IEC 60947-7-3
GL approval granted	✓
GL rated voltage	500 V
GL rated current	10 A
GL wire cross-section single core (rigid), min.	10 mm ²

17042.2

SIK 10/ST BG

SIK 10/ST BG

Approvals

KEMA KEUR approval

KEMA KEUR approval	EN 60947-7-3
KEMA KEUR approval granted	✓
KEMA rated voltage	500 V
KEMA voltage fuse, max.	250 V
KEMA rated current	10 A
KEMA rated impulse voltage	8 kV
KEMA wire cross-section single core (rigid), min.	2 mm ²
KEMA wire cross-section single-core (rigid), max.	10 mm ²
KEMA wire cross-section stranded, min.	2 mm ²
KEMA wire cross-section stranded, max.	10 mm ²
KEMA torque, min.	12 Nm
KEMA torque, max.	2 Nm
KEMA fuse size	5 x 20 / 5 x 25 / 5 x 30 mm
KEMA power loss in singular arrangement - overload and short-circuit protection, max.	2,5 / 6,3 W / A
KEMA power loss in compound arrangement - overload and short-circuit protection, max.	2,5 / 6,3 W / A
KEMA power loss in singular arrangement - only short-circuit protection, max.	4 / 10 W / A
KEMA power loss in compound arrangement - only short-circuit protection, max.	4 / 6,3 W / A

17042.2

SIK 10/ST BG

SIK 10/ST BG

Approvals

UL Recognized



UL Recognized	UL 1059
UL Recognized granted	✓
UL Usegroup B: rated voltage	600 V
UL Usegroup B: rated current	10 A
UL Usegroup C: rated voltage	600 V
UL Usegroup C: rated current	10 A
UL wire cross-section single-core (rigid) AWG, min.	22
UL wire cross-section single-core (rigid) AWG, max.	12
UL wire cross-section stranded AWG, min.	22
UL wire cross-section stranded AWG, max.	12
UL torque	16 Lb In
UL wire material	Cu
UL factory wiring	✓
UL field wiring	✓

17042.2


SIK 10/ST BG

SIK 10/ST BG

Media

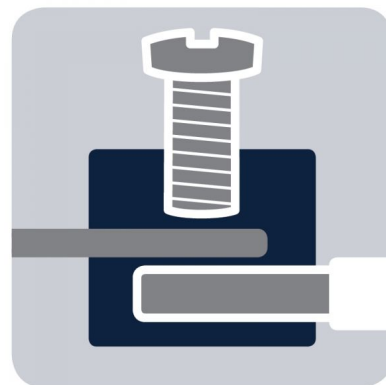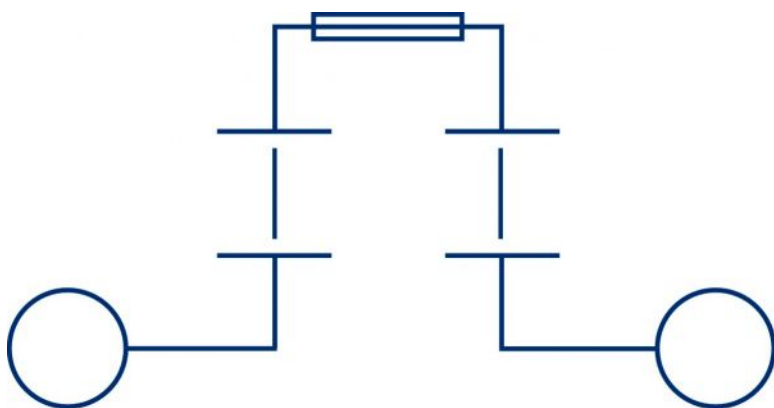

M4



EAC



17042.2

SIK 10/ST BG

SIK 10/ST BG

Media




17042.2

SIK 10/ST BG

SIK 10/ST BG

Accessories

End plate

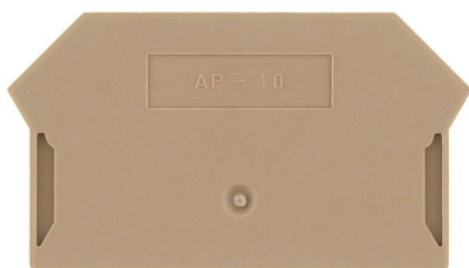

End plate, Width: 2 mm, Colour: Beige

In general

Order number	Article designation	GTIN (EAN)	Packaging unit
2762.2	AP 10	4044211054922	20 PC

External insulated cross-connector



External insulated cross-connector, No. of poles: 10, Mounting type: Plug in, Width: 80.9 mm, Rated current: 57 A; Colour: Yellow

In general

Order number	Article designation	GTIN (EAN)	Packaging unit
3443.8	AQI 10/8/18	4044211137588	10 PC


17042.2

SIK 10/ST BG

SIK 10/ST BG

Accessories


External insulated cross-connector



External insulated cross-connector, No. of poles: 2,
Mounting type: Plug in, Width: 16.1 mm, Rated
current: 57 A; Colour: Yellow

In general

Order number	Article designation	GTIN (EAN)	Packaging unit
3440.8	AQI 2/8/18	4044211137540	50 PC



External insulated cross-connector, No. of poles: 3,
Mounting type: Plug in, Width: 24.2 mm, Rated
current: 57 A; Colour: Yellow

In general

Order number	Article designation	GTIN (EAN)	Packaging unit
3441.8	AQI 3/8/18	4044211137557	50 PC

17042.2

SIK 10/ST BG

SIK 10/ST BG

Accessories

External insulated cross-connector



External insulated cross-connector, No. of poles: 4,
Mounting type: Plug in, Width: 32.3 mm, Rated
current: 57 A; Colour: Yellow

In general

Order number	Article designation	GTIN (EAN)	Packaging unit
3442.8	AQI 4/8/18	4044211137564	50 PC



External insulated cross-connector, No. of poles: 60,
Mounting type: Plug in, Rated current: 57 A; Colour:
Yellow

In general

Order number	Article designation	GTIN (EAN)	Packaging unit
3444.8	AQI 60/8/18	4044211137571	1 PC

17042.2

SIK 10/ST BG

SIK 10/ST BG

Accessories

End bracket



End stop, Mounting type: Mounting rail TS 35/7.5,
Width: 9.5 mm, Colour: Beige

In general

Order number	Article designation	GTIN (EAN)	Packaging unit
2828.0	ES 35/K/ST	4044211055547	50 PC

Contact sleeve



Solid link, Colour: natural

In general

Order number	Article designation	GTIN (EAN)	Packaging unit
2470.0	KH 5	4044211052607	100 PC


17042.2

SIK 10/ST BG

SIK 10/ST BG

Accessories


LED-status display



Status display, Display: LED, Mounting type: Plug in, Colour: Beige

In general

Order number	Article designation	GTIN (EAN)	Packaging unit
1117.2	SST/SIK/2 LED`s(RD)/24V DC	4044211018047	10 PC



Status display, Display: LED, Mounting type: Plug in, Colour: Beige

In general

Order number	Article designation	GTIN (EAN)	Packaging unit
1116.2	SST/SIK/LED(RD)/115V DC/230V AC	4044211017972	10 PC


17042.2

SIK 10/ST BG

SIK 10/ST BG

Accessories


LED-status display



Status display, Display: LED, Mounting type: Plug in, Colour: Beige

In general

Order number	Article designation	GTIN (EAN)	Packaging unit
1113.2	SST/SIK/LED(RD)/12V DC/24V AC	4044211017682	10 PC



Status display, Display: LED, Mounting type: Plug in, Colour: Beige

In general

Order number	Article designation	GTIN (EAN)	Packaging unit
1114.2	SST/SIK/LED(RD)/20-30V DC/40-60V AC	4044211017897	10 PC


17042.2

SIK 10/ST BG

SIK 10/ST BG

Accessories

LED-status display



Status display, Display: LED, Mounting type: Plug in,
Colour: Beige

In general

Order number	Article designation	GTIN (EAN)	Packaging unit
1115.2	SST/SIK/LED(RD)/40-60V DC/80-120V AC	4044211017965	10 PC



Status display, Display: LED, Mounting type: Plug in,
Colour: Beige

In general

Order number	Article designation	GTIN (EAN)	Packaging unit
17045.2	SST/SIK/LED(RD)/500 V AC/DC	4044211155834	25 PC


17042.2

SIK 10/ST BG

SIK 10/ST BG

Accessories

Quick-marking



Terminal marker / Pocket Maxicard, Length: 5 mm,
Width: 8 mm, Colour: White

In general

Order number	Article designation	GTIN (EAN)	Packaging unit
9323.7	PMC SB 8/40 WH	4044211129231	400 PC

Screw driver



Screwdriver with bare blade, Colour: Black-grey

In general

Order number	Article designation	GTIN (EAN)	Packaging unit
1087.0	SDB 0,8x4,0	4044211014803	1 PC
