


17124.9

SRK 16/2A RD

SRK 16/2A RD

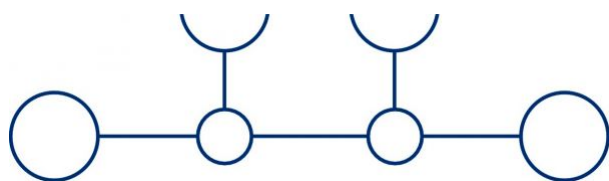

Feed-through terminal, Screw connection, Mounting type: Mounting rail TS 35/7.5, Rated cross-section: 16 mm², Width: 12.1 mm, Colour: Red

Business data

Product description	Feed-through terminal
Packaging unit	50
Quantity unit	PC
Weight per piece (not including packaging)	27.9
Weight per piece (including packaging)	29.6
Unit of weight	G
Customs number	85369010
Country of origin	DE

17124.9

SRK 16/2A RD

SRK 16/2A RD

Technical Data

Dimensions

Length	53 mm
Width	12.1 mm
Height TS 35/7.5	55 mm

Ratings

Rated voltage	1000 V
Rated current	76 A
Current load, max.	101 A
Rated cross-section	16 mm ²
Rated impulse voltage	8 kV
Overvoltage category	III
Contamination degree	3

17124.9

SRK 16/2A RD

SRK 16/2A RD

Technical Data

Connection data

Connection principle	Screw connection
Connection position	Lateral
Connections	2
Number of terminals per level	2
Number of levels	1
Wire cross-section single-core (rigid) / stranded, min.	1.5 mm ²
Wire cross-section single core (rigid)/stranded, max.	25 mm ²
Wire cross-section stranded, min.	1.5 mm ²
Wire cross-section stranded, max.	25 mm ²
Wire cross-section stranded with wire-end ferrules, min.	1 mm ²
Wire cross-section stranded with wire-end ferrules, max.	16 mm ²
Wire cross-section AWG, min.	16
Wire cross-section AWG, max.	4
Stripping length	14 mm
Screw head	Slotted
Screw threading	M 5
Tightening torque, min.	2.5 Nm
Tightening torque, max.	3 Nm

17124.9

SRK 16/2A RD

SRK 16/2A RD

Technical Data

Materials

Insulation housing	Polyamide 6.6
--------------------	---------------

Flammability class UL 94	V-0
--------------------------	-----

Working temperature, min.	-40 °C
---------------------------	--------

Working temperature, max.	120 °C
---------------------------	--------

Further technical data

Mounting type	Mounting rail TS 35/7,5
---------------	-------------------------

Gauge plug acc. to EN 60 947-1	A7
--------------------------------	----

Number of cross-connection channels	2
-------------------------------------	---

End plate required	✓
--------------------	---

Number of test pick-off options	1
---------------------------------	---

17124.9

SRK 16/2A RD

SRK 16/2A RD

Approvals

Standards and regulations

EAC approval	TR ZU 004/2011
--------------	----------------

EAC approval granted	✓
----------------------	---

CSA approval

CSA approval	C22.2 No 158
--------------	--------------

CSA approval granted	✓
----------------------	---

CSA Usegroup C: rated voltage	600 V
-------------------------------	-------

CSA Usegroup C: rated current	80 A
-------------------------------	------

CSA wire cross-section AWG, min.	16
----------------------------------	----

CSA wire cross-section AWG, max.	4
----------------------------------	---

CSA torque, max.	3 Nm
------------------	------

CSA torque, min.	2.5 Nm
------------------	--------

17124.9

SRK 16/2A RD

SRK 16/2A RD

Approvals

CSAus approval

CSAus approval	UL 1059
CSAus approval granted	✓
CSAus Usegroup C: rated voltage	600 V
CSAus Usegroup C: rated current	80 A
CSAus wire cross-section AWG, min.	16
CSAus wire cross-section AWG, max.	4
CSAus torque, min.	2.5 Nm
CSAus torque, max.	3 Nm

KEMA KEUR approval

KEMA KEUR approval	EN 60947-7-1
KEMA KEUR approval granted	✓
KEMA rated voltage	1000 V
KEMA rated current	76 A
KEMA rated impulse voltage	8 kV
KEMA wire cross-section single core (rigid), min.	1.5 mm ²
KEMA wire cross-section single-core (rigid), max.	16 mm ²
KEMA wire cross-section stranded, min.	1.5 mm ²
KEMA wire cross-section stranded, max.	16 mm ²

17124.9

SRK 16/2A RD

SRK 16/2A RD

Approvals

KEMA KEUR approval

KEMA torque, min.	2.5 Nm
-------------------	--------

KEMA torque, max.	3 Nm
-------------------	------

UL Recognized

UL Recognized	UL 1059
---------------	---------

UL Recognized granted	✓
-----------------------	---

UL Usegroup B: rated voltage	600 V
------------------------------	-------

UL Usegroup B: rated current	80 A
------------------------------	------

UL Usegroup C: rated voltage	600 V
------------------------------	-------

UL Usegroup C: rated current	80 A
------------------------------	------

UL wire cross-section single-core (rigid) AWG, min.	16
-----------------------------------------------------	----

UL wire cross-section single-core (rigid) AWG, max.	4
-----------------------------------------------------	---

UL wire cross-section stranded AWG, min.	16
------------------------------------------	----

UL wire cross-section stranded AWG, max.	4
------------------------------------------	---

UL torque, min.	22.1 Lb In.
-----------------	-------------

UL torque, max.	26.5 Lb In.
-----------------	-------------

UL wire material	Cu
------------------	----

UL factory wiring	✓
-------------------	---

UL field wiring	✓
-----------------	---



Datasheet

17124.9

SRK 16/2A RD

SRK 16/2A RD

Media

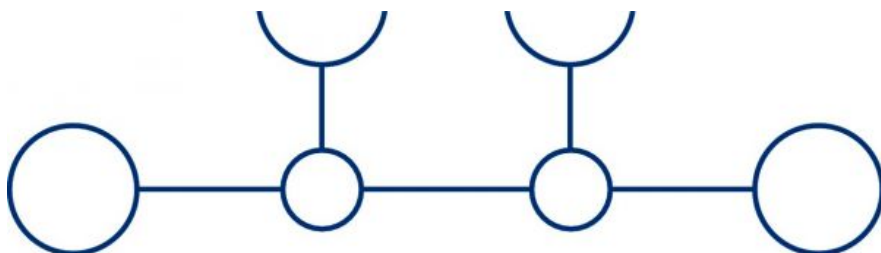

M5



EAC



17124.9

SRK 16/2A RD

SRK 16/2A RD

Media



17124.9

SRK 16/2A RD

SRK 16/2A RD

Accessories

Cover



Cover, Length: 33.25 mm, Width: 12 mm, Colour: Yellow

In general

Order number	Article designation	GTIN (EAN)	Packaging unit
17249.8	SAD 1/12/B	4044211199210	20 PC



Cover, Colour: White

In general

Order number	Article designation	GTIN (EAN)	Packaging unit
17248.7	SAD 1/12/B	4044211181123	20 PC

17124.9

SRK 16/2A RD

SRK 16/2A RD

Accessories

Measurement pick-off terminal




Measurement pick-off terminal, Screw connection, Mounting type: On base, Rated cross-section: 6 mm², Width: 8.3 mm, Colour: Beige

In general

Order number	Article designation	GTIN (EAN)	Packaging unit
17135.2	SMAG 16/6	4044211181093	10 PC

End plate



End plate, Width: 1.5 mm, Colour: Beige

In general

Order number	Article designation	GTIN (EAN)	Packaging unit
17254.2	SAP 16/2A	4044211181109	20 PC

17124.9

SRK 16/2A RD

SRK 16/2A RD

Accessories

End bracket



End stop, Mounting type: Mounting rail TS 35/7.5 and TS 35/15, Width: 8 mm, Colour: Beige

In general

Order number	Article designation	GTIN (EAN)	Packaging unit
17250.2	SES 35	4044211178253	50 PC

Insulated cross connector



Insulated cross-connector, No. of poles: 2, Mounting type: Plug in, Width: 20 mm, Rated cross-section: 16 mm², Colour: Yellow

In general

Order number	Article designation	GTIN (EAN)	Packaging unit
17247.8	SQI 16/2	4044211181116	20 PC


17124.9

SRK 16/2A RD

SRK 16/2A RD

Accessories

Quick-marking



Terminal marker / Pocket Maxicard, Length: 5 mm,
Width: 8 mm, Colour: White

In general

Order number	Article designation	GTIN (EAN)	Packaging unit
9323.7	PMC SB 8/40 WH	4044211129231	400 PC

Screw driver



Screwdriver with bare blade, Colour: Black-grey

In general

Order number	Article designation	GTIN (EAN)	Packaging unit
1087.0	SDB 0,8x4,0	4044211014803	1 PC
