



17131.2

SSL 16/2A/IS GNYE

SSL 16/2A/IS GNYE

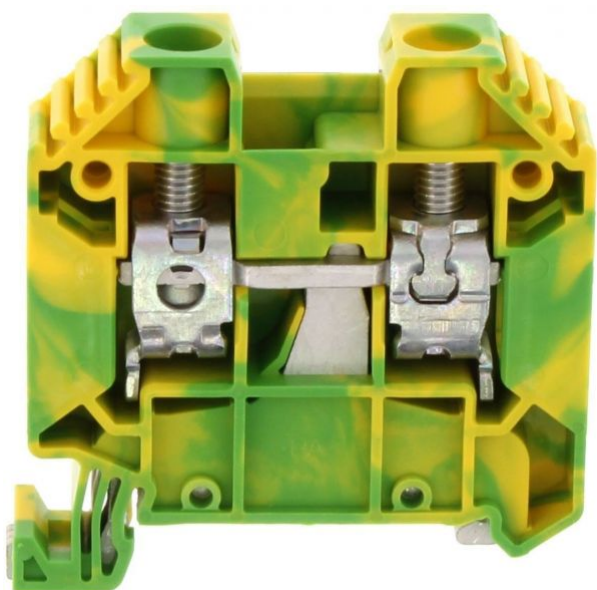

M4



EAC



Protective earth terminal, Screw connection, Mounting type: Mounting rail TS 35/7.5, Rated cross-section: 16 mm², Width: 10 mm, Colour: Green-yellow

Business data

Product description	Protective earth terminal
Packaging unit	50
Quantity unit	PC
Weight per piece (not including packaging)	41.55
Weight per piece (including packaging)	41.75
Unit of weight	G
Customs number	85369010
Country of origin	DE

17131.2

SSL 16/2A/IS GNYE

SSL 16/2A/IS GNYE

Technical Data

Dimensions

Length	48 mm
--------	-------

Width	10 mm
-------	-------

Height TS 35/7.5	47 mm
------------------	-------

Ratings

Rated cross-section	16 mm ²
---------------------	--------------------

Overvoltage category	III
----------------------	-----

Contamination degree	3
----------------------	---

17131.2

SSL 16/2A/IS GNYE

SSL 16/2A/IS GNYE

Technical Data

Connection data

Connection principle	Screw connection
Connection position	Lateral
Connections	2
Number of terminals per level	2
Number of levels	1
Wire cross-section single-core (rigid) / stranded, min.	1.5 mm ²
Wire cross-section single core (rigid)/stranded, max.	25 mm ²
Wire cross-section stranded, min.	1.5 mm ²
Wire cross-section stranded, max.	25 mm ²
Wire cross-section stranded with wire-end ferrules, min.	1 mm ²
Wire cross-section stranded with wire-end ferrules, max.	16 mm ²
Wire cross-section AWG, min.	16
Wire cross-section AWG, max.	4
Stripping length	10 mm
Screw head	Inner hex (Allen)
Screw threading	M 4
Tightening torque, min.	2 Nm
Tightening torque, max.	4 Nm

17131.2

SSL 16/2A/IS GNYE

SSL 16/2A/IS GNYE

Technical Data

Materials

Insulation housing	Polyamide 6.6
--------------------	---------------

Flammability class UL 94	V-0
--------------------------	-----

Working temperature, min.	-40 °C
---------------------------	--------

Working temperature, max.	120 °C
---------------------------	--------

Further technical data

Mounting type	Mounting rail TS 35/7,5
---------------	-------------------------

Gauge plug acc. to EN 60 947-1	A7
--------------------------------	----

Number of cross-connection channels	1
-------------------------------------	---

End plate required	✓
--------------------	---

Number of test pick-off options	1
---------------------------------	---

17131.2

SSL 16/2A/IS GNYE

SSL 16/2A/IS GNYE

Approvals

Standards and regulations

EAC approval	TR ZU 004/2011
--------------	----------------

EAC approval granted	✓
----------------------	---

CSA approval

CSA approval	C22.2 No 158
--------------	--------------

CSA approval granted	✓
----------------------	---

CSA wire cross-section AWG, min.	16
----------------------------------	----

CSA wire cross-section AWG, max.	4
----------------------------------	---

CSA torque, max.	3 Nm
------------------	------

CSA torque, min.	2.5 Nm
------------------	--------

CSAus approval

CSAus approval	UL 1059
----------------	---------

CSAus approval granted	✓
------------------------	---

CSAus wire cross-section AWG, min.	16
------------------------------------	----

CSAus wire cross-section AWG, max.	4
------------------------------------	---

CSAus torque, min.	2.5 Nm
--------------------	--------

CSAus torque, max.	3 Nm
--------------------	------

KEMA KEUR approval

KEMA KEUR approval	EN 60947-7-2
--------------------	--------------

KEMA KEUR approval granted	✓
----------------------------	---

KEMA wire cross-section single core (rigid), min.	1.5 mm ²
---	---------------------

KEMA wire cross-section single-core (rigid), max.	16 mm ²
---	--------------------

KEMA wire cross-section stranded, min.	1.5 mm ²
--	---------------------

KEMA wire cross-section stranded, max.	16 mm ²
--	--------------------

KEMA torque, min.	2.5 Nm
-------------------	--------

KEMA torque, max.	3 Nm
-------------------	------

UL Recognized

UL Recognized	© CONTA CLIP Verbindungstechnik GmbH Otto-Hahn-Str. 7 D-33161 Havelhof Fon +49 (0) 52 57.98 33-0 Fax +49 (0) 52 57.98 33-33 E-Mail info@conta-clip.de conta-clip.de
---------------	--

UL Recognized granted	Creation date 24.09.2021 01:14:25 Subject to technical modifications
-----------------------	---

UL wire cross-section single-core (rigid) AWG, min.	16
---	----

UL wire cross-section single-core (rigid) AWG, max.	4
---	---

17131.2

SSL 16/2A/IS GNYE

SSL 16/2A/IS GNYE

Approvals

UL Recognized

UL factory wiring

✓

UL field wiring


✓

17131.2


SSL 16/2A/IS GNYE

SSL 16/2A/IS GNYE

Media

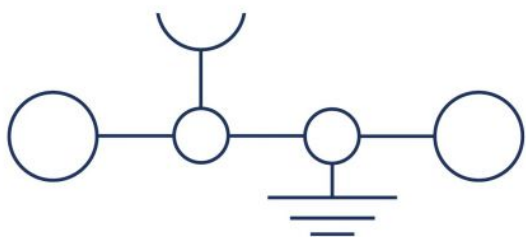

M4



EAC



17131.2

SSL 16/2A/IS GNYE

SSL 16/2A/IS GNYE

Media



17131.2

SSL 16/2A/IS GNYE

SSL 16/2A/IS GNYE

Accessories

Cover



Cover, Length: 33.25 mm, Width: 12 mm, Colour: Yellow

In general

Order number	Article designation	GTIN (EAN)	Packaging unit
17249.8	SAD 1/12/B	4044211199210	20 PC



Cover, Colour: White

In general

Order number	Article designation	GTIN (EAN)	Packaging unit
17248.7	SAD 1/12/B	4044211181123	20 PC

17131.2

SSL 16/2A/IS GNYE

SSL 16/2A/IS GNYE

Accessories

Measurement pick-off terminal




Measurement pick-off terminal, Screw connection, Mounting type: On base, Rated cross-section: 6 mm², Width: 8.3 mm, Colour: Beige

In general

Order number	Article designation	GTIN (EAN)	Packaging unit
17135.2	SMAG 16/6	4044211181093	10 PC

End plate



End plate, Width: 1.5 mm, Colour: Beige

In general

Order number	Article designation	GTIN (EAN)	Packaging unit
17254.2	SAP 16/2A	4044211181109	20 PC


17131.2

SSL 16/2A/IS GNYE

SSL 16/2A/IS GNYE

Accessories

End bracket



End stop, Mounting type: Mounting rail TS 35/7.5 and TS 35/15, Width: 8 mm, Colour: Beige

In general

Order number	Article designation	GTIN (EAN)	Packaging unit
17250.2	SES 35	4044211178253	50 PC

Insulated cross connector



Insulated cross-connector, No. of poles: 2, Mounting type: Plug in, Width: 20 mm, Rated cross-section: 16 mm², Colour: Yellow

In general

Order number	Article designation	GTIN (EAN)	Packaging unit
17247.8	SQI 16/2	4044211181116	20 PC


17131.2

SSL 16/2A/IS GNYE

SSL 16/2A/IS GNYE

Accessories

Quick-marking



Terminal marker / Pocket Maxicard, Length: 5 mm,
Width: 8 mm, Colour: White

In general

Order number	Article designation	GTIN (EAN)	Packaging unit
9323.7	PMC SB 8/40 WH	4044211129231	400 PC
