
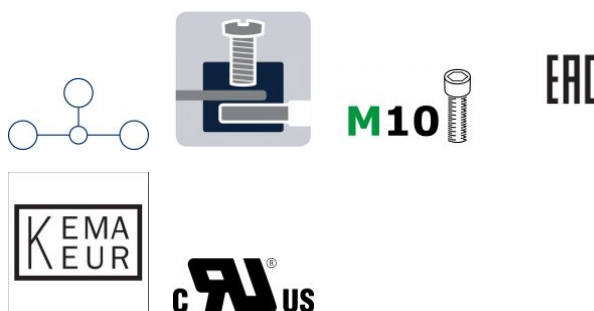


17165.5

SRK 120/2A BU

SRK 120/2A BU

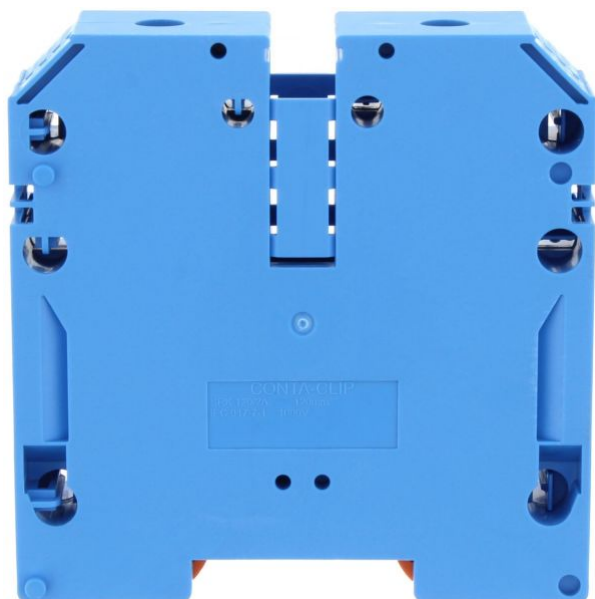

Feed-through terminal, Screw connection, Mounting type: Mounting rail TS 35/7.5, Rated cross-section: 120 mm², Width: 27 mm, Colour: Blue

Business data

Product description	Feed-through terminal
Packaging unit	5
Quantity unit	PC
Weight per piece (not including packaging)	280.7
Weight per piece (including packaging)	301.9
Unit of weight	G
Customs number	
Country of origin	

17165.5

SRK 120/2A BU

SRK 120/2A BU

Technical Data

Dimensions

Length	91 mm
Width	27 mm
Height TS 35/7.5	91 mm

Ratings

Rated voltage	1000 V
Rated current	269 A
Current load, max.	290 A
Rated cross-section	120 mm ²
Rated impulse voltage	8 kV
Overvoltage category	III
Contamination degree	3

17165.5

SRK 120/2A BU

SRK 120/2A BU

Technical Data

Connection data

Connection principle	Screw connection
Connection position	Lateral
Connections	2
Number of terminals per level	2
Number of levels	1
Wire cross-section single-core (rigid) / stranded, min.	16 mm ²
Wire cross-section single core (rigid)/stranded, max.	150 mm ²
Wire cross-section stranded, min.	16 mm ²
Wire cross-section stranded, max.	120 mm ²
Wire cross-section stranded with wire-end ferrules, min.	16 mm ²
Wire cross-section stranded with wire-end ferrules, max.	95 mm ²
Wire cross-section AWG, min.	4
Wire cross-section AWG, max.	0000
Stripping length	27 mm
Screw head	Inner hex (Allen)
Screw threading	M 10
Tightening torque, min.	12 Nm
Tightening torque, max.	20 Nm

17165.5

SRK 120/2A BU

SRK 120/2A BU

Technical Data

Materials

Insulation housing	Polyamide 6.6
--------------------	---------------

Flammability class UL 94	V-0
--------------------------	-----

Working temperature, min.	-40 °C
---------------------------	--------

Working temperature, max.	120 °C
---------------------------	--------

Further technical data

Mounting type	Mounting rail TS 35/7,5
---------------	-------------------------

Gauge plug acc. to EN 60 947-1	B13
--------------------------------	-----

Number of cross-connection channels	1
-------------------------------------	---

Number of test pick-off options	1
---------------------------------	---

17165.5

SRK 120/2A BU

SRK 120/2A BU

Approvals

Standards and regulations

EAC approval	TR ZU 004/2011
--------------	----------------

EAC approval granted	✓
----------------------	---

cUL Recognized

cUL Recognized	C22.2 No 158
----------------	--------------

cUL Recognized	✓
----------------	---

cUL Usegroup B: rated voltage	600 V
-------------------------------	-------

cUL Usegroup B: rated current	228 A
-------------------------------	-------

cUL Usegroup C: rated voltage	600 V
-------------------------------	-------

cUL Usegroup D: rated voltage	600 V
-------------------------------	-------

cUL Usegroup D: rated current	228 A
-------------------------------	-------

cUL Usegroup E: rated voltage	1000 V
-------------------------------	--------

cUL Usegroup E: rated current	228 A
-------------------------------	-------

cUL wire cross-section single-core (rigid) AWG, min.	4
--	---

cUL wire cross-section single-core (rigid) AWG, max.	4/0
--	-----

cUL wire cross-section stranded AWG, min.	4
---	---

cUL wire cross-section stranded AWG, max.	4/0
---	-----

cUL torque, min.	12 Nm
------------------	-------

cUL torque, max.	20 Nm
------------------	-------

17165.5

SRK 120/2A BU

SRK 120/2A BU

Approvals

cUL Recognized

cUL wire material	Cu
-------------------	----

KEMA KEUR approval

KEMA KEUR approval	EN 60947-7-1
--------------------	--------------

KEMA KEUR approval granted	✓
----------------------------	---

KEMA rated voltage	1000 V
--------------------	--------

KEMA rated current	269 A
--------------------	-------

KEMA rated impulse voltage	8 kV
----------------------------	------

KEMA wire cross-section single core (rigid), min.	16 mm ²
---	--------------------

KEMA wire cross-section single-core (rigid), max.	150 mm ²
---	---------------------

KEMA wire cross-section stranded, min.	16 mm ²
--	--------------------

KEMA wire cross-section stranded, max.	150 mm ²
--	---------------------

KEMA torque, min.	12 Nm
-------------------	-------

KEMA torque, max.	20 Nm
-------------------	-------

17165.5

SRK 120/2A BU

SRK 120/2A BU

Approvals

UL Recognized



UL Recognized	UL 1059
UL Recognized granted	✓
UL Usegroup B: rated voltage	600 V
UL Usegroup B: rated current	228 A
UL Usegroup C: rated voltage	600 V
UL Usegroup C: rated current	228 A
UL Usegroup D: rated voltage	600 V
UL Usegroup D: rated current	228 A
UL Usegroup E: rated voltage	1000 V
UL Usegroup E: rated current	228 A
UL wire cross-section single-core (rigid) AWG, min.	4
UL wire cross-section single-core (rigid) AWG, max.	4/0
UL wire cross-section stranded AWG, min.	4
UL wire cross-section stranded AWG, max.	4/0
UL torque, min.	106.2 Lb In.
UL torque, max.	177 Lb In.
UL wire material	Cu
UL factory wiring	✓
UL field wiring	✓

17165.5


SRK 120/2A BU

SRK 120/2A BU

Media

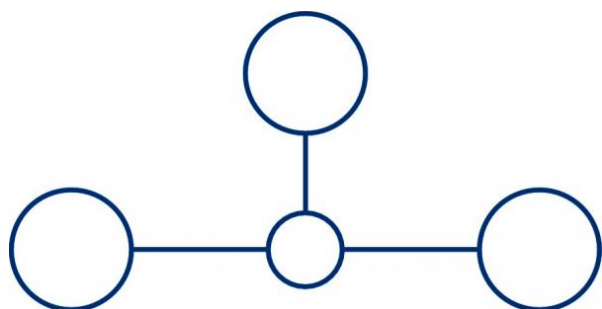

M10



EAC



17165.5

SRK 120/2A BU

SRK 120/2A BU

Accessories

Cover



Cover, Length: 70.2 mm, Width: 26.5 mm, Colour: White

In general

Order number	Article designation	GTIN (EAN)	Packaging unit
17290.7	SAD 1/27/B	4044211205560	5 PC



Cover, Length: 70.2 mm, Width: 26.5 mm, Colour: Yellow

In general

Order number	Article designation	GTIN (EAN)	Packaging unit
17291.8	SAD 1/27/B	4044211205577	5 PC

17165.5

SRK 120/2A BU

SRK 120/2A BU

Accessories

Measurement pick-off terminal




Measurement pick-off terminal, Screw connection,
Mounting type: On base, Rated cross-section: 10 mm²,
Width: 10 mm, Colour: Beige

In general

Order number	Article designation	GTIN (EAN)	Packaging unit
1125.2	MAG 150/240	4044211080921	10 PC

Insertion profile

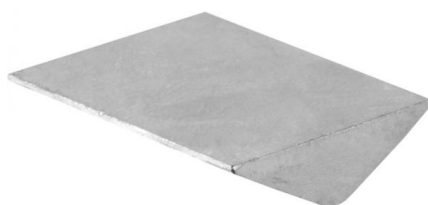

Inlay plate, Colour: natural

In general

Order number	Article designation	GTIN (EAN)	Packaging unit
2275.0	EP 95	4044211050825	10 PC

17165.5

SRK 120/2A BU

SRK 120/2A BU

Accessories

Allan key




Inner hex key with bare blade

In general

Order number	Article designation	GTIN (EAN)	Packaging unit
2772.0	ISKS 6	4044211055028	1 PC

Cross connector

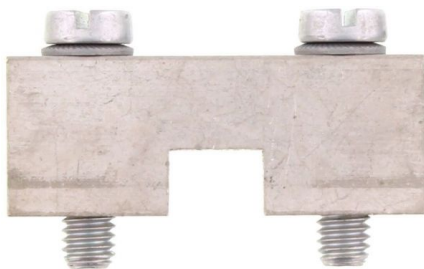

Cross-connector, No. of poles: 2, Mounting type: Can be screwed on, Width: 44 mm, Rated cross-section: 120 mm², Colour: natural

In general

Order number	Article designation	GTIN (EAN)	Packaging unit
17278.0	SQ 120/2	4044211189471	10 PC

17165.5

SRK 120/2A BU

SRK 120/2A BU

Accessories

Cross connector



Cross-connector, No. of poles: 3, Mounting type: Can be screwed on, Width: 71 mm, Rated cross-section: 120 mm², Colour: natural

In general

Order number	Article designation	GTIN (EAN)	Packaging unit
17279.0	SQ 120/3	4044211189358	10 PC



Cross-connector, No. of poles: 4, Mounting type: Can be screwed on, Width: 98 mm, Rated cross-section: 120 mm², Colour: natural

In general

Order number	Article designation	GTIN (EAN)	Packaging unit
17280.0	SQ 120/4	4044211189488	10 PC


17165.5

SRK 120/2A BU

SRK 120/2A BU

Accessories

Quick-marking



Terminal marker / Pocket Maxicard, Length: 5 mm,
Width: 8 mm, Colour: White

In general

Order number	Article designation	GTIN (EAN)	Packaging unit
9323.7	PMC SB 8/40 WH	4044211129231	400 PC
