


17181.5

SRKD 2,5/SV BU

SRKD 2,5/SV BU

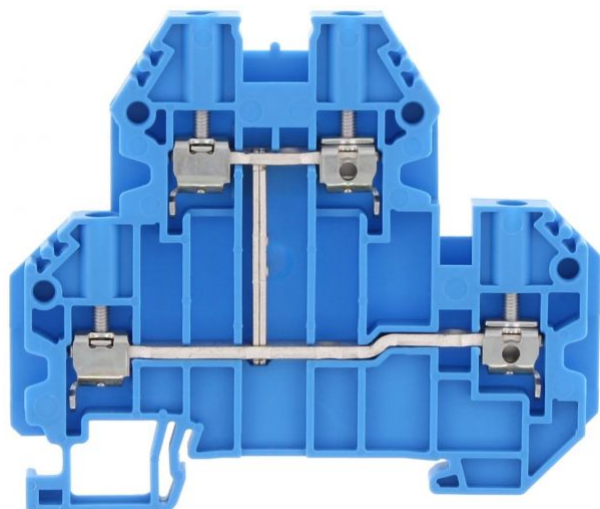

M2.5



EAC



Double-level terminal, Screw connection, Mounting type: Mounting rail TS 35/7.5, Rated cross-section: 2.5 mm<sup>2</sup>, Width: 5.1 mm, Colour: Blue

## Business data

Product description	Double-level terminal
Packaging unit	100
Quantity unit	PC
Weight per piece (not including packaging)	16.85
Weight per piece (including packaging)	16.95
Unit of weight	G
Customs number	85369010
Country of origin	DE

**17181.5**

**SRKD 2,5/SV BU**

**SRKD 2,5/SV BU**

## Technical Data

---

### Dimensions

---

Length	76 mm
Width	5.1 mm
Height TS 35/7.5	65 mm

### Ratings

---

Rated voltage	1000 V
Rated current	24 A
Current load, max.	32 A
Rated cross-section	2.5 mm <sup>2</sup>
Rated impulse voltage	8 kV
Overvoltage category	III
Contamination degree	3

17181.5

SRKD 2,5/SV BU

SRKD 2,5/SV BU

## Technical Data

---

### Connection data

---

Connection principle	Screw connection
Connection position	Lateral
Connections	4
Number of terminals per level	2
Number of levels	2
Levels internally bridged	✓
Wire cross-section single-core (rigid) / stranded, min.	0.2 mm <sup>2</sup>
Wire cross-section single core (rigid)/stranded, max.	4 mm <sup>2</sup>
Wire cross-section stranded, min.	0.2 mm <sup>2</sup>
Wire cross-section stranded, max.	4 mm <sup>2</sup>
Wire cross-section stranded with wire-end ferrules, min.	0.2 mm <sup>2</sup>
Wire cross-section stranded with wire-end ferrules, max.	2.5 mm <sup>2</sup>
Wire cross-section AWG, min.	30
Wire cross-section AWG, max.	12
Stripping length	10 mm
Screw head	Slotted
Screw threading	M 2,5
Tightening torque, min.	0.4 Nm
Tightening torque, max.	0.8 Nm

17181.5

SRKD 2,5/SV BU

SRKD 2,5/SV BU

## Technical Data

---

### Materials

---

Insulation housing	Polyamide 6.6
--------------------	---------------

Flammability class UL 94	V-0
--------------------------	-----

Working temperature, min.	-40 °C
---------------------------	--------

Working temperature, max.	120 °C
---------------------------	--------

### Further technical data

---

Mounting type	Mounting rail TS 35/7,5
---------------	-------------------------

Gauge plug acc. to EN 60 947-1	A3
--------------------------------	----

Number of cross-connection channels	2
-------------------------------------	---

End plate required	✓
--------------------	---

Number of test pick-off options	1
---------------------------------	---

17181.5

SRKD 2,5/SV BU

SRKD 2,5/SV BU

## Approvals

---

### Standards and regulations

EAC approval	TR ZU 004/2011
EAC approval granted	✓

### cUL Recognized

cUL Recognized	C22.2 No 158
cUL Recognized	✓
cUL Usegroup B: rated voltage	600 V
cUL Usegroup B: rated current	20 A
cUL Usegroup C: rated voltage	600 V
cUL Usegroup C: rated current	20 A
cUL Usegroup D: rated voltage	600 V
cUL Usegroup D: rated current	20 A
cUL wire cross-section single-core (rigid) AWG, min.	30
cUL wire cross-section single-core (rigid) AWG, max.	12
cUL wire cross-section stranded AWG, min.	30
cUL wire cross-section stranded AWG, max.	12
cUL torque, min.	0.4 Nm
cUL torque, max.	0.8 Nm
cUL wire material	Cu

### KEMA KEUR approval

KEMA KEUR approval	EN 60947-7-1
KEMA KEUR approval granted	✓
KEMA rated voltage	1000 V
KEMA rated current	24 A
KEMA rated impulse voltage	8 kV
KEMA wire cross-section single core (rigid), min.	0.2 mm <sup>2</sup>
KEMA wire cross-section single-core (rigid), max.	4 mm <sup>2</sup>
KEMA wire cross-section stranded, min.	0.2 mm <sup>2</sup>
KEMA wire cross-section stranded, max.	4 mm <sup>2</sup>

17181.5

SRKD 2,5/SV BU

SRKD 2,5/SV BU

## Approvals

---

### UL Recognized

UL Recognized	UL 1059
UL Recognized granted	✓
UL Usegroup B: rated voltage	600 V
UL Usegroup B: rated current	20 A
UL Usegroup C: rated voltage	600 V
UL Usegroup C: rated current	20 A
UL Usegroup D: rated voltage	600 V
UL Usegroup D: rated current	20 A
UL wire cross-section single-core (rigid) AWG, min.	30
UL wire cross-section single-core (rigid) AWG, max.	12
UL wire cross-section stranded AWG, min.	30
UL wire cross-section stranded AWG, max.	12
UL torque, min.	3.5 Lb In.
UL torque, max.	7 Lb In.
UL wire material	Cu
UL factory wiring	✓
UL field wiring	✓

17181.5

SRKD 2,5/SV BU

SRKD 2,5/SV BU

Media

---



**M2.5** 

**EAC**



**CRA<sup>®</sup> US**

17181.5

SRKD 2,5/SV BU

SRKD 2,5/SV BU

## Accessories

---

### End plate

---




End plate, Width: 1.5 mm, Colour: Beige

### In general

Order number	Article designation	GTIN (EAN)	Packaging unit
17292.2	SAPD 2,5-4	4044211190828	20 PC

### End bracket

---



End stop, Mounting type: Mounting rail TS 35/7.5 and TS 35/15, Width: 8 mm, Colour: Beige

### In general

Order number	Article designation	GTIN (EAN)	Packaging unit
17250.2	SES 35	4044211178253	50 PC



17181.5

SRKD 2,5/SV BU

SRKD 2,5/SV BU

## Accessories

---

### Insulating cover for cross-connector

---



Insulating cap, Colour: Yellow

#### In general

Order number	Article designation	GTIN (EAN)	Packaging unit
17200.8	SQIK 2,5-10	4044211148539	20 PC

---

### Insulated cross connector

---



Insulated cross-connector, No. of poles: 10, Mounting type: Plug in, Width: 50.7 mm, Rated cross-section: 2.5 mm<sup>2</sup>, Colour: Yellow

#### In general

Order number	Article designation	GTIN (EAN)	Packaging unit
17209.8	SQI 2,5/10	4044211148621	10 PC

---

17181.5

SRKD 2,5/SV BU

SRKD 2,5/SV BU

## Accessories

---

### Insulated cross connector

---



Insulated cross-connector, No. of poles: 2, Mounting type: Plug in, Width: 9.9 mm, Rated cross-section: 2.5 mm<sup>2</sup>, Colour: Yellow

### In general

Order number	Article designation	GTIN (EAN)	Packaging unit
17201.8	SQI 2,5/2	4044211148546	50 PC

---



Insulated cross-connector, No. of poles: 3, Mounting type: Plug in, Width: 15 mm, Rated cross-section: 2.5 mm<sup>2</sup>, Colour: Yellow

### In general

Order number	Article designation	GTIN (EAN)	Packaging unit
17202.8	SQI 2,5/3	4044211148553	50 PC

---

17181.5

SRKD 2,5/SV BU

SRKD 2,5/SV BU

## Accessories

---

### Insulated cross connector

---




Insulated cross-connector, No. of poles: 30, Mounting type: Plug in, Width: 152.7 mm, Rated cross-section: 2.5 mm<sup>2</sup>, Colour: Yellow

### In general

Order number	Article designation	GTIN (EAN)	Packaging unit
17210.8	SQI 2,5/30	4044211148638	5 PC

---



Insulated cross-connector, No. of poles: 4, Mounting type: Plug in, Width: 20.1 mm, Rated cross-section: 2.5 mm<sup>2</sup>, Colour: Yellow

### In general

Order number	Article designation	GTIN (EAN)	Packaging unit
17203.8	SQI 2,5/4	4044211148560	20 PC

---

17181.5

SRKD 2,5/SV BU

SRKD 2,5/SV BU

## Accessories

---

### Insulated cross connector

---



Insulated cross-connector, No. of poles: 5, Mounting type: Plug in, Width: 25.2 mm, Rated cross-section: 2.5 mm<sup>2</sup>, Colour: Yellow

### In general

Order number	Article designation	GTIN (EAN)	Packaging unit
17204.8	SQI 2,5/5	4044211148577	20 PC

---



Insulated cross-connector, No. of poles: 6, Mounting type: Plug in, Width: 30.3 mm, Rated cross-section: 2.5 mm<sup>2</sup>, Colour: Yellow

### In general

Order number	Article designation	GTIN (EAN)	Packaging unit
17205.8	SQI 2,5/6	4044211148584	20 PC

---

17181.5

SRKD 2,5/SV BU

SRKD 2,5/SV BU

## Accessories

---

### Insulated cross connector

---



Insulated cross-connector, No. of poles: 7, Mounting type: Plug in, Width: 35.4 mm, Rated cross-section: 2.5 mm<sup>2</sup>, Colour: Yellow

### In general

Order number	Article designation	GTIN (EAN)	Packaging unit
17206.8	SQI 2,5/7	4044211148591	20 PC

---



Insulated cross-connector, No. of poles: 8, Mounting type: Plug in, Width: 40.5 mm, Rated cross-section: 2.5 mm<sup>2</sup>, Colour: Yellow

### In general

Order number	Article designation	GTIN (EAN)	Packaging unit
17207.8	SQI 2,5/8	4044211148607	10 PC

---

17181.5

SRKD 2,5/SV BU

SRKD 2,5/SV BU

## Accessories

---

### Insulated cross connector

---



Insulated cross-connector, No. of poles: 9, Mounting type: Plug in, Width: 45.6 mm, Rated cross-section: 2.5 mm<sup>2</sup>, Colour: Yellow

### In general

Order number	Article designation	GTIN (EAN)	Packaging unit
17208.8	SQI 2,5/9	4044211148614	10 PC

---

### Screw driver

---



Screwdriver with bare blade, Colour: Black-grey

### In general

Order number	Article designation	GTIN (EAN)	Packaging unit
1085.0	SDB 0,5x3,0	4044211014643	1 PC

---

17181.5

SRKD 2,5/SV BU


SRKD 2,5/SV BU

## Accessories

---

## Quick-marking

---



Terminal marker / Pocket Maxicard, Length: 5 mm,  
Width: 5 mm, Colour: White

---

## In general

Order number	Article designation	GTIN (EAN)	Packaging unit
4600.7	PMC SB 5/50 WH	4044211088903	500 PC

---