


17182.2

SSLD 2,5 GNYE



M2.5

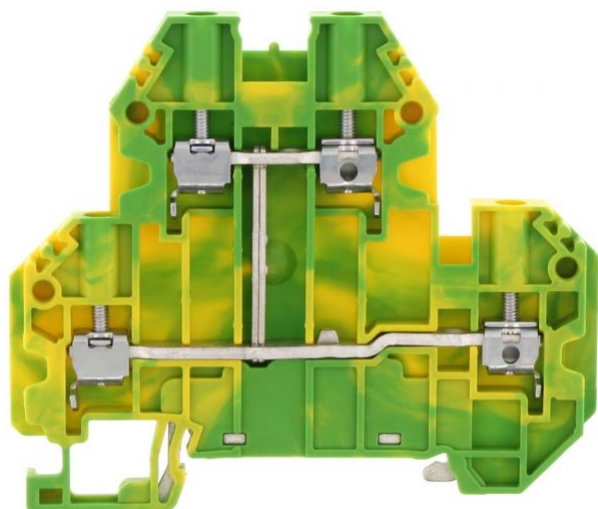

EAC



C  US

Protective-earth double-level terminal, Screw connection, Mounting type: Mounting rail TS 35/7.5, Rated cross-section: 2.5 mm<sup>2</sup>, Width: 5.1 mm, Colour: Green-yellow

## Business data

Product description	Protective-earth double-level terminal
Packaging unit	100
Quantity unit	PC
Weight per piece (not including packaging)	20.66
Weight per piece (including packaging)	20.76
Unit of weight	G
Customs number	85369010
Country of origin	DE

## 17182.2 SSLD 2,5 GNYE

### Technical Data

---

#### Dimensions

---

Length	76 mm
Width	5.1 mm
Height TS 35/7.5	65 mm

#### Ratings

---

Rated cross-section	2.5 mm <sup>2</sup>
Overvoltage category	III
Contamination degree	3

## 17182.2 SSLD 2,5 GNYE

### Technical Data

---

#### Connection data

Connection principle	Screw connection
Connection position	Lateral
Connections	4
Number of terminals per level	2
Number of levels	2
Levels internally bridged	✓
Wire cross-section single-core (rigid) / stranded, min.	0.2 mm <sup>2</sup>
Wire cross-section single core (rigid)/stranded, max.	4 mm <sup>2</sup>
Wire cross-section stranded, min.	0.2 mm <sup>2</sup>
Wire cross-section stranded, max.	4 mm <sup>2</sup>
Wire cross-section stranded with wire-end ferrules, min.	0.2 mm <sup>2</sup>
Wire cross-section stranded with wire-end ferrules, max.	2.5 mm <sup>2</sup>
Wire cross-section AWG, min.	30
Wire cross-section AWG, max.	12
Stripping length	10 mm
Screw head	Slotted
Screw threading	M 2,5
Tightening torque, min.	0.4 Nm
Tightening torque, max.	0.8 Nm

## 17182.2 SSLD 2,5 GNYE

### Technical Data

---

#### Materials

Insulation housing	Polyamide 6.6
Flammability class UL 94	V-0
Working temperature, min.	-40 °C
Working temperature, max.	120 °C

#### Further technical data

Mounting type	Mounting rail TS 35/7,5
Gauge plug acc. to EN 60 947-1	A3
Number of cross-connection channels	2
End plate required	✓
Number of test pick-off options	1

## 17182.2 SSLD 2,5 GNYE

### Approvals

---

#### Standards and regulations

---

EAC approval	TR ZU 004/2011
--------------	----------------

EAC approval granted	✓
----------------------	---

#### cUL Recognized

---

cUL Recognized	C22.2 No 158
----------------	--------------

cUL Recognized	✓
----------------	---

cUL wire cross-section single-core (rigid) AWG, min.	30
--	----

cUL wire cross-section single-core (rigid) AWG, max.	12
--	----

cUL wire cross-section stranded AWG, min.	30
---	----

cUL wire cross-section stranded AWG, max.	12
---	----

cUL torque, min.	0.4 Nm
------------------	--------

cUL torque, max.	0.8 Nm
------------------	--------

cUL wire material	Cu
-------------------	----

## 17182.2 SSLD 2,5 GNYE

### Approvals

---

#### KEMA KEUR approval

---

KEMA KEUR approval	EN 60947-7-2
KEMA KEUR approval granted	✓
KEMA wire cross-section single core (rigid), min.	0.2 mm <sup>2</sup>
KEMA wire cross-section single-core (rigid), max.	4 mm <sup>2</sup>
KEMA wire cross-section stranded, min.	0.2 mm <sup>2</sup>
KEMA wire cross-section stranded, max.	4 mm <sup>2</sup>

#### UL Recognized

---

UL Recognized	UL 1059
UL Recognized granted	✓
UL wire cross-section single-core (rigid) AWG, min.	30
UL wire cross-section single-core (rigid) AWG, max.	12
UL wire cross-section stranded AWG, min.	30
UL wire cross-section stranded AWG, max.	12
UL torque, min.	3.5 Lb In.
UL torque, max.	7 Lb In.
UL wire material	Cu
UL factory wiring	✓
UL field wiring	✓

17182.2  
SSLD 2,5 GNYE

Media

---



**M2.5** 

**EAC**



**CRA<sup>®</sup> US**

## 17182.2 SSLD 2,5 GNYE

### Accessories

---

#### End plate

---



End plate, Width: 1.5 mm, Colour: Beige


#### In general

Order number	Article designation	GTIN (EAN)	Packaging unit
17292.2	SAPD 2,5-4	4044211190828	20 PC

---

#### End bracket

---



End stop, Mounting type: Mounting rail TS 35/7.5 and TS 35/15, Width: 8 mm, Colour: Beige

#### In general

Order number	Article designation	GTIN (EAN)	Packaging unit
17250.2	SES 35	4044211178253	50 PC

---



## 17182.2 SSLD 2,5 GNYE

### Accessories

---

#### Insulating cover for cross-connector

---



Insulating cap, Colour: Yellow

---


#### In general

Order number	Article designation	GTIN (EAN)	Packaging unit
17200.8	SQIK 2,5-10	4044211148539	20 PC

---

#### Insulated cross connector

---

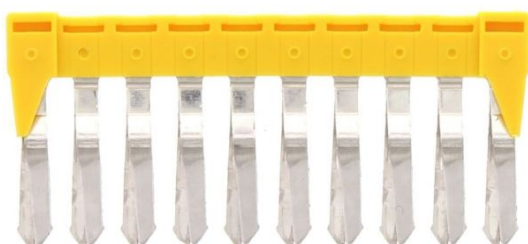

Insulated cross-connector, No. of poles: 10, Mounting type: Plug in, Width: 50.7 mm, Rated cross-section: 2.5 mm<sup>2</sup>, Colour: Yellow

---

#### In general

Order number	Article designation	GTIN (EAN)	Packaging unit
17209.8	SQI 2,5/10	4044211148621	10 PC

---

## 17182.2 SSLD 2,5 GNYE

### Accessories

---

#### Insulated cross connector

---



Insulated cross-connector, No. of poles: 2, Mounting type: Plug in, Width: 9.9 mm, Rated cross-section: 2.5 mm<sup>2</sup>, Colour: Yellow

#### In general

Order number	Article designation	GTIN (EAN)	Packaging unit
17201.8	SQI 2,5/2	4044211148546	50 PC

---



Insulated cross-connector, No. of poles: 3, Mounting type: Plug in, Width: 15 mm, Rated cross-section: 2.5 mm<sup>2</sup>, Colour: Yellow

#### In general

Order number	Article designation	GTIN (EAN)	Packaging unit
17202.8	SQI 2,5/3	4044211148553	50 PC

---

## 17182.2 SSLD 2,5 GNYE

### Accessories

---

#### Insulated cross connector

---




Insulated cross-connector, No. of poles: 30, Mounting type: Plug in, Width: 152.7 mm, Rated cross-section: 2.5 mm<sup>2</sup>, Colour: Yellow

#### In general

Order number	Article designation	GTIN (EAN)	Packaging unit
17210.8	SQI 2,5/30	4044211148638	5 PC

---



Insulated cross-connector, No. of poles: 4, Mounting type: Plug in, Width: 20.1 mm, Rated cross-section: 2.5 mm<sup>2</sup>, Colour: Yellow

#### In general

Order number	Article designation	GTIN (EAN)	Packaging unit
17203.8	SQI 2,5/4	4044211148560	20 PC

---

## 17182.2 SSLD 2,5 GNYE

### Accessories

---

#### Insulated cross connector

---



Insulated cross-connector, No. of poles: 5, Mounting type: Plug in, Width: 25.2 mm, Rated cross-section: 2.5 mm<sup>2</sup>, Colour: Yellow

#### In general

Order number	Article designation	GTIN (EAN)	Packaging unit
17204.8	SQI 2,5/5	4044211148577	20 PC

---



Insulated cross-connector, No. of poles: 6, Mounting type: Plug in, Width: 30.3 mm, Rated cross-section: 2.5 mm<sup>2</sup>, Colour: Yellow

#### In general

Order number	Article designation	GTIN (EAN)	Packaging unit
17205.8	SQI 2,5/6	4044211148584	20 PC

---

## 17182.2 SSLD 2,5 GNYE

### Accessories

---

#### Insulated cross connector

---



Insulated cross-connector, No. of poles: 7, Mounting type: Plug in, Width: 35.4 mm, Rated cross-section: 2.5 mm<sup>2</sup>, Colour: Yellow

#### In general

Order number	Article designation	GTIN (EAN)	Packaging unit
17206.8	SQI 2,5/7	4044211148591	20 PC

---



Insulated cross-connector, No. of poles: 8, Mounting type: Plug in, Width: 40.5 mm, Rated cross-section: 2.5 mm<sup>2</sup>, Colour: Yellow

#### In general

Order number	Article designation	GTIN (EAN)	Packaging unit
17207.8	SQI 2,5/8	4044211148607	10 PC

---

## 17182.2 SSLD 2,5 GNYE

### Accessories

---

#### Insulated cross connector

---



Insulated cross-connector, No. of poles: 9, Mounting type: Plug in, Width: 45.6 mm, Rated cross-section: 2.5 mm<sup>2</sup>, Colour: Yellow


#### In general

Order number	Article designation	GTIN (EAN)	Packaging unit
17208.8	SQI 2,5/9	4044211148614	10 PC

---

#### Quick-marking

---



Terminal marker / Pocket Maxicard, Length: 5 mm, Width: 5 mm, Colour: White

#### In general

Order number	Article designation	GTIN (EAN)	Packaging unit
4600.7	PMC SB 5/50 WH	4044211088903	500 PC

---

## 17182.2 SSLD 2,5 GNYE

### Accessories

---

#### Screw driver

---



Screwdriver with bare blade, Colour: Black-grey

#### In general

Order number	Article designation	GTIN (EAN)	Packaging unit
1085.0	SDB 0,5x3,0	4044211014643	1 PC

---