



27013.2

PSL 4/2A GNYE

PSL 4/2A GNYE

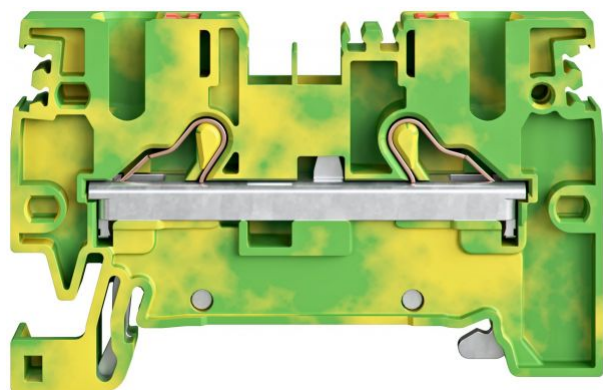

Protective earth terminal, Push-in connection, Mounting type: Mounting rail TS 35/7.5, Rated cross-section: 4 mm², Width: 6.1 mm, Colour: Green-yellow

Business data

Product description	Protective earth terminal
Packaging unit	50
Quantity unit	PC
Weight per piece (not including packaging)	11.93
Weight per piece (including packaging)	12.2
Unit of weight	G
Customs number	85369010
Country of origin	DE

27013.2

PSL 4/2A GNYE

PSL 4/2A GNYE

Technical Data

Dimensions

Length	56 mm
Width	6.1 mm
Height	35.2 mm
Height TS 35/7.5	36.7 mm

Ratings

Rated cross-section	4 mm ²
Rated impulse voltage	8 kV
Overvoltage category	III
Contamination degree	3

27013.2

PSL 4/2A GNYE

PSL 4/2A GNYE

Technical Data

Connection data

Connection principle	Push-in connection
Connection position	Top
Connections	2
Number of terminals per level	2
Number of levels	1
Wire cross-section single-core (rigid) / stranded, min.	0.2 mm ²
Wire cross-section single core (rigid)/stranded, max.	6 mm ²
Wire cross-section stranded, min.	0.2 mm ²
Wire cross-section stranded, max.	4 mm ²
Wire cross-section stranded with wire-end ferrules, min.	0.25 mm ²
Wire cross-section stranded with wire-end ferrules, max.	4 mm ²
Wire cross-section AWG, min.	24
Wire cross-section AWG, max.	10
Stripping length	12 mm

Materials

Insulation housing	Polyamide 6.6
Flammability class UL 94	V-0
Working temperature, min.	-40 °C

27013.2

PSL 4/2A GNYE

PSL 4/2A GNYE

Technical Data

Materials

Working temperature, max.	120 °C
---------------------------	--------

Further technical data

Mounting type	Mounting rail TS 35/7,5
---------------	-------------------------

Gauge plug acc. to EN 60 947-1	A4
--------------------------------	----

Number of cross-connection channels	1
-------------------------------------	---

End plate required	✓
--------------------	---

27013.2

PSL 4/2A GNYE

PSL 4/2A GNYE

Approvals

Standards and regulations

EAC approval	TR ZU 004/2011
--------------	----------------

EAC approval applied for	✓
--------------------------	---

CSA approval

CSA approval	C22.2 No 158
--------------	--------------

CSA approval applied for	✓
--------------------------	---

KEMA KEUR approval

KEMA KEUR approval	EN 60947-7-2
--------------------	--------------

KEMA KEUR approval applied for	✓
--------------------------------	---

UL Recognized

UL Recognized	UL 1059
---------------	---------



UL Recognized applied for	✓
---------------------------	---

27013.2

PSL 4/2A GNYE

PSL 4/2A GNYE

Media

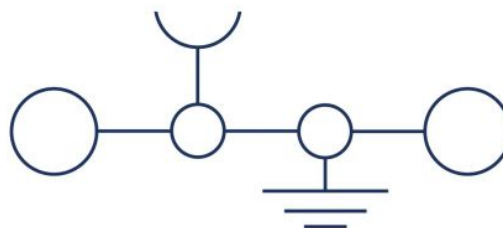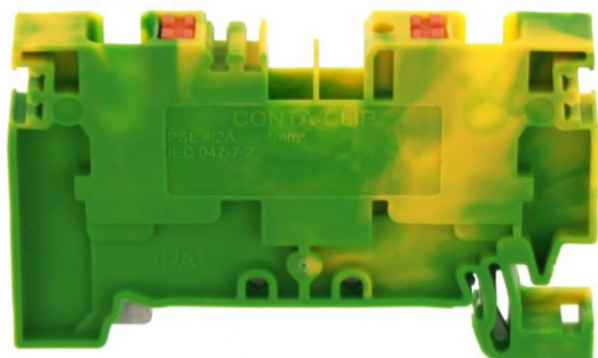

27013.2

PSL 4/2A GNYE

PSL 4/2A GNYE

Accessories

End plate



End plate, Width: 1.5 mm, Colour: Grey

In general

Order number	Article designation	GTIN (EAN)	Packaging unit
27106.6	PAP 4/2A	4044211224592	20 PC

End bracket



End stop, Mounting type: Mounting rail TS 35/7.5 and TS 35/15, Width: 5 mm, Colour: Beige

In general

Order number	Article designation	GTIN (EAN)	Packaging unit
3811.2	ZES 35/2	4044211080600	50 PC

27013.2

PSL 4/2A GNYE

PSL 4/2A GNYE

Accessories

Test plug




Test plug, Colour: Red

In general

Order number	Article designation	GTIN (EAN)	Packaging unit
2007.0	PS 2,3	4044211048105	20 PC

Insulated cross connector



Insulated cross-connector, No. of poles: 3, Mounting type: Plug in, Width: 16.2 mm, Colour: Red

In general

Order number	Article designation	GTIN (EAN)	Packaging unit
27143.9	PQI 4/3	4044211225292	50 PC


27013.2

PSL 4/2A GNYE

PSL 4/2A GNYE

Accessories

Insulated cross connector



Insulated cross-connector, No. of poles: 4, Mounting type: Plug in, Width: 22.3 mm, Colour: Red

In general

Order number	Article designation	GTIN (EAN)	Packaging unit
27144.9	PQI 4/4	4044211225308	20 PC



Insulated cross-connector, No. of poles: 2, Mounting type: Plug in, Width: 10.1 mm, Colour: Red

In general

Order number	Article designation	GTIN (EAN)	Packaging unit
27142.9	PQI 4/2	4044211225285	50 PC

27013.2

PSL 4/2A GNYE

PSL 4/2A GNYE

Accessories

Insulated cross connector



Insulated cross-connector, No. of poles: 10, Mounting type: Plug in, Width: 58.9 mm, Colour: Red

In general

Order number	Article designation	GTIN (EAN)	Packaging unit
27150.9	PQI 4/10	4044211225322	10 PC



Insulated cross-connector, No. of poles: 10, Mounting type: Plug in, Width: 119.9 mm, Colour: Red

In general

Order number	Article designation	GTIN (EAN)	Packaging unit
27151.9	PQI 4/20	4044211225339	5 PC

27013.2

PSL 4/2A GNYE

PSL 4/2A GNYE

Accessories

Quick-marking



Terminal marker / PC Card, Length: 5 mm, Width: 6 mm, Colour: White

In general

Order number	Article designation	GTIN (EAN)	Packaging unit
28343.7	PC-SB 6X5/44 WH	4044211215996	800 PC

Screw driver



Screwdriver with bare blade, Colour: Black-grey

In general

Order number	Article designation	GTIN (EAN)	Packaging unit
1085.0	SDB 0,5x3,0	4044211014643	1 PC
