

3581.8

ZRK 6/2A YE

ZRK 6/2A YE



Feed-through terminal, Tension-spring connection, Mounting type: Mounting rail TS 35/7.5, Rated cross-section: 6 mm², Width: 8.1 mm, Colour: Yellow

Business data

Product description	Feed-through terminal
Packaging unit	100
Quantity unit	PC
Weight per piece (not including packaging)	16.8
Weight per piece (including packaging)	17.8
Unit of weight	G
Customs number	85369010
Country of origin	DE

3581.8

ZRK 6/2A YE

ZRK 6/2A YE

Technical Data

Dimensions

Length	65 mm
Width	8.1 mm
Height TS 35/7.5	47.5 mm

Ratings

Rated voltage	1000 V
Rated current	41 A
Rated cross-section	6 mm ²
Rated impulse voltage	8 kV
Overvoltage category	III
Contamination degree	3

3581.8

ZRK 6/2A YE

ZRK 6/2A YE

Technical Data

Connection data

Connection principle	Tension-spring connection
Connection position	Diagonal
Connections	2
Number of terminals per level	2
Number of levels	1
Wire cross-section single-core (rigid) / stranded, min.	0.5 mm ²
Wire cross-section single core (rigid)/stranded, max.	10 mm ²
Wire cross-section stranded, min.	0.5 mm ²
Wire cross-section stranded, max.	10 mm ²
Wire cross-section stranded with wire-end ferrules, min.	0.5 mm ²
Wire cross-section stranded with wire-end ferrules, max.	6 mm ²
Wire cross-section AWG, min.	22
Wire cross-section AWG, max.	8
Stripping length	13 mm

Materials

Insulation housing	Polyamide 6.6
Flammability class UL 94	V-0
Working temperature, min.	-40 °C

3581.8

ZRK 6/2A YE

ZRK 6/2A YE

Technical Data

Materials

Working temperature, max.	120 °C
---------------------------	--------

Further technical data

Mounting type	Mounting rail TS 35/7,5
---------------	-------------------------

Gauge plug acc. to EN 60 947-1	A5
--------------------------------	----

Number of cross-connection channels	1
-------------------------------------	---

End plate required	✓
--------------------	---

Number of test pick-off options	2
---------------------------------	---

3581.8

ZRK 6/2A YE

ZRK 6/2A YE

Approvals

Standards and regulations

EAC approval	TR ZU 004/2011
--------------	----------------

EAC approval granted	✓
----------------------	---

CSA approval

CSA approval	C22.2 No 158
--------------	--------------

CSA approval granted	✓
----------------------	---

CSA Usegroup C: rated voltage	600 V
-------------------------------	-------

CSA Usegroup C: rated current	50 A
-------------------------------	------

CSA wire cross-section AWG, min.	22
----------------------------------	----

CSA wire cross-section AWG, max.	8
----------------------------------	---

CSA stripping length	10 mm
----------------------	-------

CSAus approval

CSAus approval	UL 1059
----------------	---------

CSAus approval granted	✓
------------------------	---

CSAus Usegroup C: rated voltage	600 V
---------------------------------	-------

CSAus Usegroup C: rated current	50 A
---------------------------------	------

CSAus wire cross-section AWG, min.	22
------------------------------------	----

3581.8

ZRK 6/2A YE

ZRK 6/2A YE

Approvals

CSAus approval

CSAus wire cross-section AWG, max.	8
CSAus stripping length	10 mm

cUL Recognized

cUL Recognized	C22.2 No 158
cUL Recognized	✓
cUL Usegroup B: rated voltage	600 V
cUL Usegroup B: rated current	50 A
cUL Usegroup C: rated voltage	600 V
cUL Usegroup C: rated current	50 A
cUL Usegroup D: rated voltage	600 V
cUL Usegroup D: rated current	50 A
cUL wire cross-section single-core (rigid) AWG, min.	22
cUL wire cross-section single-core (rigid) AWG, max.	8
cUL wire cross-section stranded AWG, min.	22
cUL wire cross-section stranded AWG, max.	8
cUL wire material	Cu

3581.8

ZRK 6/2A YE

ZRK 6/2A YE

Approvals

German Lloyd approval

GL approval	IEC 60947-7-1
GL approval granted	✓
GL rated voltage	800 V
GL rated current	41 A
GL wire cross-section single core (rigid), min.	6 mm ²
GL wire cross-section single-core (rigid), max.	10 mm ²
GL wire cross-section, min.	6 mm ²
GL wire cross-section stranded, max.	10 mm ²
GL environmental category	C

KEMA KEUR approval

KEMA KEUR approval	EN 60947-7-1
KEMA KEUR approval granted	✓
KEMA rated voltage	1000 V
KEMA rated current	41 A
KEMA rated impulse voltage	8 kV
KEMA wire cross-section single core (rigid), min.	0.5 mm ²
KEMA wire cross-section single-core (rigid), max.	10 mm ²
KEMA wire cross-section stranded, min.	0.5 mm ²

3581.8

ZRK 6/2A YE

ZRK 6/2A YE

Approvals

KEMA KEUR approval

KEMA wire cross-section stranded, max.	10 mm ²
--	--------------------

UL Recognized

UL Recognized	UL 1059
---------------	---------

UL Recognized granted	✓
-----------------------	---

UL Usegroup B: rated voltage	600 V
------------------------------	-------

UL Usegroup B: rated current	50 A
------------------------------	------

UL Usegroup C: rated voltage	600 V
------------------------------	-------

UL Usegroup C: rated current	50 A
------------------------------	------

UL Usegroup D: rated voltage	600 V
------------------------------	-------

UL Usegroup D: rated current	50 A
------------------------------	------

UL wire cross-section single-core (rigid) AWG, min.	22
---	----

UL wire cross-section single-core (rigid) AWG, max.	8
---	---

UL wire cross-section stranded AWG, min.	22
--	----

UL wire cross-section stranded AWG, max.	8
--	---

UL wire material	Cu
------------------	----

UL factory wiring	✓
-------------------	---


UL field wiring	✓
-----------------	---

3581.8

ZRK 6/2A YE

ZRK 6/2A YE

Media

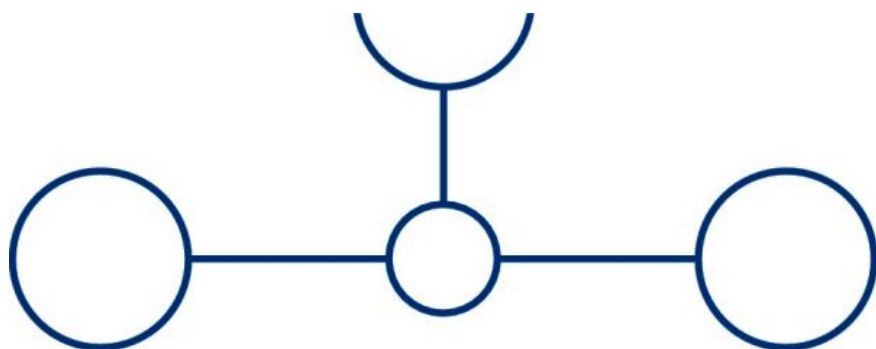

3581.8

ZRK 6/2A YE

ZRK 6/2A YE

Media




CRAUS®

3581.8
ZRK 6/2A YE
ZRK 6/2A YE

Accessories

End plate

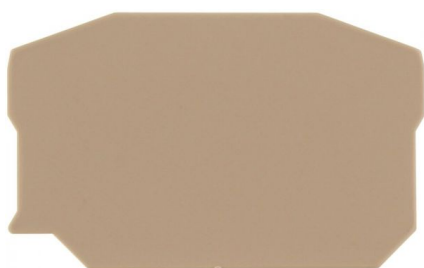


End plate, Width: 2 mm, Colour: Beige

In general

Order number	Article designation	GTIN (EAN)	Packaging unit
3760.2	ZAP 6/2A	4044211060817	20 PC

End bracket

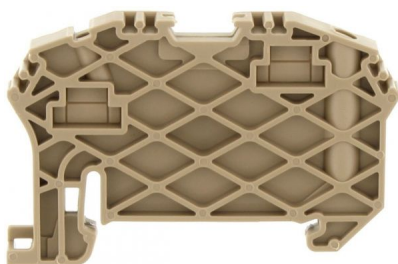

End stop, Mounting type: Mounting rail TS 35/7.5 and TS 35/15, Width: 6 mm, Colour: Beige

In general

Order number	Article designation	GTIN (EAN)	Packaging unit
3748.2	ZES 35	4044211060572	50 PC

3581.8

ZRK 6/2A YE

ZRK 6/2A YE

Accessories

Test adapter



Test adapter, Pitch size: 8.1 mm, Colour: Beige

In general

Order number	Article designation	GTIN (EAN)	Packaging unit
3772.2	ZTA 6	4044211060985	10 PC

Insulated cross connector



Insulated cross-connector, No. of poles: 10, Mounting type: Plug in, Width: 80.5 mm, Rated cross-section: 6 mm², Colour: Yellow

In general

Order number	Article designation	GTIN (EAN)	Packaging unit
3771.8	ZQI 6/10	4044211060978	10 PC

3581.8

ZRK 6/2A YE

ZRK 6/2A YE

Accessories

Insulated cross connector



Insulated cross-connector, No. of poles: 2, Mounting type: Plug in, Width: 15.7 mm, Rated cross-section: 6 mm², Colour: Yellow

In general

Order number	Article designation	GTIN (EAN)	Packaging unit
3763.8	ZQI 6/2	4044211060893	50 PC



Insulated cross-connector, No. of poles: 3, Mounting type: Plug in, Width: 23.8 mm, Rated cross-section: 6 mm², Colour: Yellow

In general

Order number	Article designation	GTIN (EAN)	Packaging unit
3764.8	ZQI 6/3	4044211060909	50 PC

3581.8

ZRK 6/2A YE

ZRK 6/2A YE

Accessories

Insulated cross connector



Insulated cross-connector, No. of poles: 4, Mounting type: Plug in, Width: 31.9 mm, Rated cross-section: 6 mm², Colour: Yellow

In general

Order number	Article designation	GTIN (EAN)	Packaging unit
3765.8	ZQI 6/4	4044211060916	20 PC



Insulated cross-connector, No. of poles: 5, Mounting type: Plug in, Width: 31.9 mm, Rated cross-section: 6 mm², Colour: Yellow

In general

Order number	Article designation	GTIN (EAN)	Packaging unit
3766.8	ZQI 6/5	4044211060923	20 PC

3581.8

ZRK 6/2A YE

ZRK 6/2A YE

Accessories

Insulated cross connector



Insulated cross-connector, No. of poles: 6, Mounting type: Plug in, Width: 48.1 mm, Rated cross-section: 6 mm², Colour: Yellow

In general

Order number	Article designation	GTIN (EAN)	Packaging unit
3767.8	ZQI 6/6	4044211060930	20 PC



Insulated cross-connector, No. of poles: 7, Mounting type: Plug in, Width: 56.2 mm, Rated cross-section: 6 mm², Colour: Yellow

In general

Order number	Article designation	GTIN (EAN)	Packaging unit
3768.8	ZQI 6/7	4044211060947	20 PC

3581.8

ZRK 6/2A YE

ZRK 6/2A YE

Accessories

Insulated cross connector



Insulated cross-connector, No. of poles: 8, Mounting type: Plug in, Width: 64.3 mm, Rated cross-section: 6 mm², Colour: Yellow

In general

Order number	Article designation	GTIN (EAN)	Packaging unit
3769.8	ZQI 6/8	4044211060954	10 PC



Insulated cross-connector, No. of poles: 9, Mounting type: Plug in, Width: 72.4 mm, Rated cross-section: 6 mm², Colour: Yellow

In general

Order number	Article designation	GTIN (EAN)	Packaging unit
3770.8	ZQI 6/9	4044211060961	10 PC


3581.8

ZRK 6/2A YE

ZRK 6/2A YE

Accessories

Quick-marking



Terminal marker / Pocket Maxicard, Length: 5 mm,
Width: 8 mm, Colour: White

In general

Order number	Article designation	GTIN (EAN)	Packaging unit
9323.7	PMC SB 8/40 WH	4044211129231	400 PC

Fourfold-cover



Cover, Length: 10.5 mm, Width: 32.4 mm, Colour:
Yellow

In general

Order number	Article designation	GTIN (EAN)	Packaging unit
3708.0	ZAD 6/4/B	4044211060268	20 PC
