

3597.1

ZRK 10/2A GN

ZRK 10/2A GN



Feed-through terminal, Tension-spring connection, Mounting type: Mounting rail TS 35/7.5, Rated cross-section: 10 mm², Width: 10.1 mm, Colour: Green

Business data

Product description	Feed-through terminal
Packaging unit	50
Quantity unit	PC
Weight per piece (not including packaging)	24.8
Weight per piece (including packaging)	26
Unit of weight	G
Customs number	85369010
Country of origin	DE

3597.1

ZRK 10/2A GN

ZRK 10/2A GN

Technical Data

Dimensions

Length	73.5 mm
Width	10.1 mm
Height TS 35/7.5	50.5 mm

Ratings

Rated voltage	1000 V
Rated current	57 A
Rated cross-section	10 mm ²
Rated impulse voltage	8 kV
Overvoltage category	III
Contamination degree	3

3597.1

ZRK 10/2A GN

ZRK 10/2A GN

Technical Data

Connection data

Connection principle	Tension-spring connection
Connection position	Diagonal
Connections	2
Number of terminals per level	2
Number of levels	1
Wire cross-section single-core (rigid) / stranded, min.	1.5 mm ²
Wire cross-section single core (rigid)/stranded, max.	16 mm ²
Wire cross-section stranded, min.	1.5 mm ²
Wire cross-section stranded, max.	10 mm ²
Wire cross-section stranded with wire-end ferrules, min.	1.5 mm ²
Wire cross-section stranded with wire-end ferrules, max.	10 mm ²
Wire cross-section AWG, min.	16
Wire cross-section AWG, max.	6
Stripping length	18 mm

Materials

Insulation housing	Polyamide 6.6
Flammability class UL 94	V-0
Working temperature, min.	-40 °C

3597.1

ZRK 10/2A GN

ZRK 10/2A GN

Technical Data

Materials

Working temperature, max.	120 °C
---------------------------	--------

Further technical data

Mounting type	Mounting rail TS 35/7,5
---------------	-------------------------

Gauge plug acc. to EN 60 947-1	B6
--------------------------------	----

Number of cross-connection channels	2
-------------------------------------	---

End plate required	✓
--------------------	---

Number of test pick-off options	2
---------------------------------	---

3597.1

ZRK 10/2A GN

ZRK 10/2A GN

Approvals

Standards and regulations

EAC approval	TR ZU 004/2011
--------------	----------------

EAC approval granted	✓
----------------------	---

CSA approval

CSA approval	C22.2 No 158
--------------	--------------

CSA approval granted	✓
----------------------	---

CSA Usegroup C: rated voltage	500 V
-------------------------------	-------

CSA Usegroup C: rated current	55 A
-------------------------------	------

CSA wire cross-section AWG, min.	16
----------------------------------	----

CSA wire cross-section AWG, max.	6
----------------------------------	---

CSA stripping length	18 mm
----------------------	-------

CSAus approval

CSAus approval	UL 1059
----------------	---------

CSAus approval granted	✓
------------------------	---

CSAus Usegroup C: rated voltage	500 V
---------------------------------	-------

CSAus Usegroup C: rated current	55 A
---------------------------------	------

CSAus wire cross-section AWG, min.	16
------------------------------------	----

3597.1

ZRK 10/2A GN

ZRK 10/2A GN

Approvals

CSAus approval

CSAus wire cross-section AWG, max.	6
CSAus stripping length	18 mm

KEMA KEUR approval

KEMA KEUR approval	EN 60947-7-1
KEMA KEUR approval granted	✓
KEMA rated voltage	1000 V
KEMA rated current	57 A
KEMA rated impulse voltage	8 kV
KEMA wire cross-section single core (rigid), min.	1.5 mm ²
KEMA wire cross-section single-core (rigid), max.	16 mm ²
KEMA wire cross-section stranded, min.	1.5 mm ²
KEMA wire cross-section stranded, max.	16 mm ²

3597.1

ZRK 10/2A GN

ZRK 10/2A GN

Approvals

UL Recognized


UL Recognized	UL 1059
UL Recognized granted	✓
UL Usegroup B: rated voltage	500 V
UL Usegroup B: rated current	55 A
UL Usegroup C: rated voltage	500 V
UL Usegroup C: rated current	55 A
UL Usegroup D: rated voltage	500 V
UL Usegroup D: rated current	55 A
UL wire cross-section single-core (rigid) AWG, min.	16
UL wire cross-section single-core (rigid) AWG, max.	6
UL wire cross-section stranded AWG, min.	16
UL wire cross-section stranded AWG, max.	6
UL wire material	Cu
UL factory wiring	✓
UL field wiring	✓

3597.1

ZRK 10/2A GN

ZRK 10/2A GN

Media

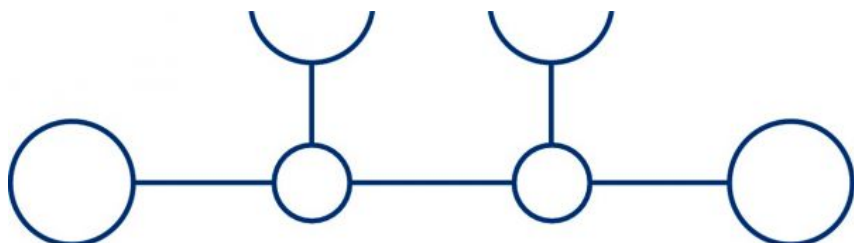

EAC



3597.1

ZRK 10/2A GN

ZRK 10/2A GN

Accessories

End plate




End plate, Width: 2 mm, Colour: Beige

In general

Order number	Article designation	GTIN (EAN)	Packaging unit
3788.2	ZAP 10/2A	4044211061159	20 PC

End bracket

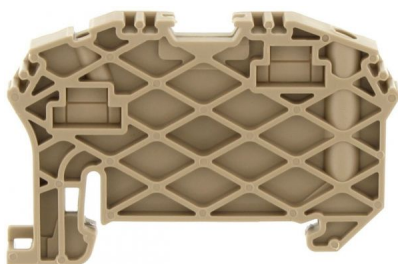

End stop, Mounting type: Mounting rail TS 35/7.5 and TS 35/15, Width: 6 mm, Colour: Beige

In general

Order number	Article designation	GTIN (EAN)	Packaging unit
3748.2	ZES 35	4044211060572	50 PC

3597.1

ZRK 10/2A GN

ZRK 10/2A GN

Accessories

Test adapter



Test adapter, Pitch size: 10.1 mm, Colour: Beige

In general

Order number	Article designation	GTIN (EAN)	Packaging unit
3790.2	ZTA 10	4044211061180	10 PC

Insulated cross connector



Insulated cross-connector, No. of poles: 2, Mounting type: Plug in, Width: 17.4 mm, Rated cross-section: 10 mm², Colour: Yellow

In general

Order number	Article designation	GTIN (EAN)	Packaging unit
3789.8	ZQI 10/2	4044211061173	20 PC


3597.1

ZRK 10/2A GN

ZRK 10/2A GN

Accessories

Quick-marking




Terminal marker / Pocket Maxicard, Length: 5 mm,
Width: 8 mm, Colour: White

In general

Order number	Article designation	GTIN (EAN)	Packaging unit
9323.7	PMC SB 8/40 WH	4044211129231	400 PC

Fourfold-cover

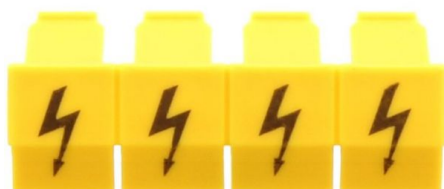

Cover, Width: 40.4 mm, Colour: Yellow

In general

Order number	Article designation	GTIN (EAN)	Packaging unit
3709.0	ZAD 10/4/B	4044211060275	20 PC
