



5712.2  
SM 3-E  
SM 3-E

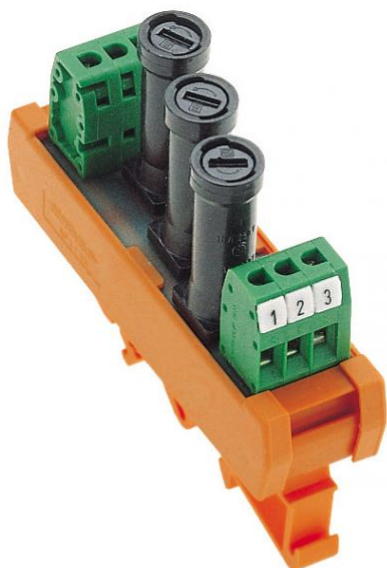

Fuse module, 3 fuse cartridges for 5x20 micro-fuses, Individually switched, Screw connection, Mounting type: Mounting rail TS 35

## Business data

Product description	Fuse modules
Packaging unit	1
Quantity unit	PC
Weight per piece (not including packaging)	60.6
Weight per piece (including packaging)	75.28
Unit of weight	G
Customs number	85363010
Country of origin	EEC

## 5712.2 SM 3-E SM 3-E

### Technical Data

---

#### Dimensions

---

Length	87 mm
Width	24 mm
Height TS 35/7.5	77 mm

#### Ratings

---

Current load, max.	6,3 A
Overvoltage category	III
Contamination degree	2

#### Connection data

---

Connection principle	Screw connection
Wire cross-section single core (rigid), min.	0.2 mm <sup>2</sup>
Wire cross-section single-core (rigid), max.	4 mm <sup>2</sup>
Wire cross-section stranded, min.	0.2 mm <sup>2</sup>
Wire cross-section stranded, max.	2.5 mm <sup>2</sup>
Wire cross-section stranded with wire-end ferrules, min.	0.2 mm <sup>2</sup>
Wire cross-section stranded with wire-end ferrules, max.	2.5 mm <sup>2</sup>
Stripping length	7 mm

**5712.2**  
**SM 3-E**  
**SM 3-E**

## Technical Data

---

### Connection data

---

Torque	0.6 Nm
--------	--------

---

### Input data

---

Max. operating voltage AC/DC	250 V
------------------------------	-------

---

Current load per channel, max.	4 A
--------------------------------	-----

---

Number of channels	3
--------------------	---

---

### Materials

---

Working temperature, min.	-20 °C
---------------------------	--------

---

Working temperature, max.	50 °C
---------------------------	-------

---

### Further technical data

---

Fuse size	5x20 mm
-----------	---------

---

5712.2

SM 3-E

SM 3-E

## Approvals

---

## Standards and regulations

---

Standards / specifications

DIN VDE 0110 / EN 50178

---

5712.2

SM 3-E

SM 3-E

## Media

---

