


Rev	AWO #	Description	Date	Appr
-		RELEASED	5/27/05	
A		CHANGED TERMINALS	9/02/09	
B		CHANGED TERMINALS	5/06/11	

APPROVED: _____
 DATE: _____ TITLE: _____

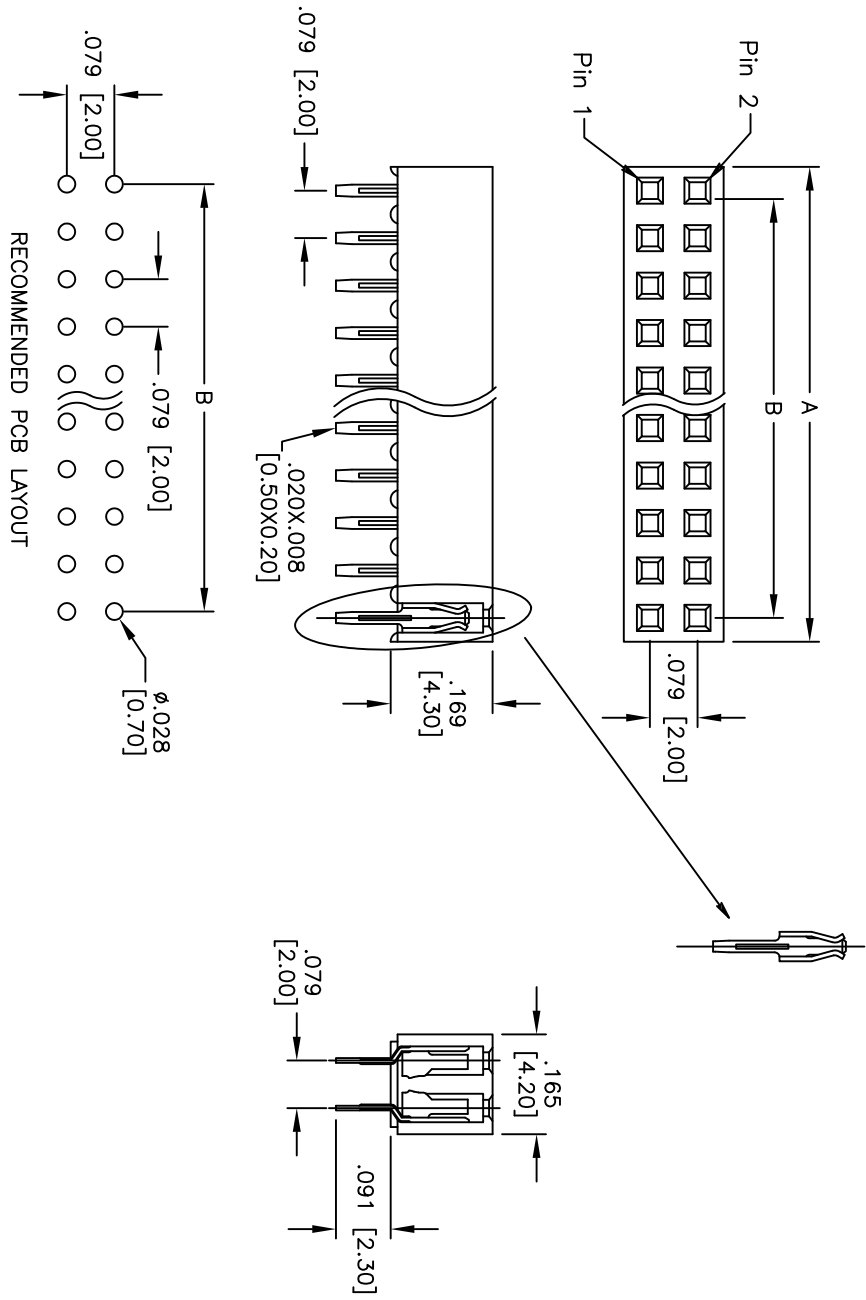

Positions: 02 thru 80
 A = .079 [2.00] x No. of Positions per Row
 B = .079 [2.00] x No. of Spaces

ADAM TECH

909 Rahway Avenue, Union, NJ 07083
 Phone: 908-687-5000 Fax: 908-687-5710

TITLE: .079 x .079 DUAL ROW RECEPTACLE STRIP
 .169 [4.30] HEIGHT, GOLD PLATED

SPECIFICATIONS:
 Material: Insulator: Nylon, rated UL 94V-0
 Insulator color: Black
 Contacts: Phosphor Bronze
 Plating: Gold flash over Nickel underplate overall
 Electrical: Current rating: 1 Amp max.
 Contact resistance: 20 mohms max. Initial
 Insulation resistance: 5,000 Mohms min.
 Dielectric withstanding voltage: 500 VAC for 1 minute
 Temperature Rating: Operating temperature: -40°C to +105°C
 Environmental: Lead free, RoHS compliant



UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE INCHES [MM] TOLERANCES: EXCEPT AS NOTED		INCHES		HOLE SIZE	
.X	± .10	Ø.X	± .10		
.XX	± .020	Ø.XXX	± .015		
.XXX	± .015	Ø.XXX	± .010		
APPROVALS		DATE			
DRAWN	SS	5/27/05			
CHECKED					
APPROVED					
SIZE	PART NO.	SCALE: NTS		SHEET	REV.
X	2RS2-XX-G	NTS		1 OF 1	B
REF: S00099T					