

6

5

4

3


2

1

APPROVED: _____

DATE: _____ TITLE: _____

Rev	AWO #	Description	Date	Appr
-		RELEASED	12/22/18	

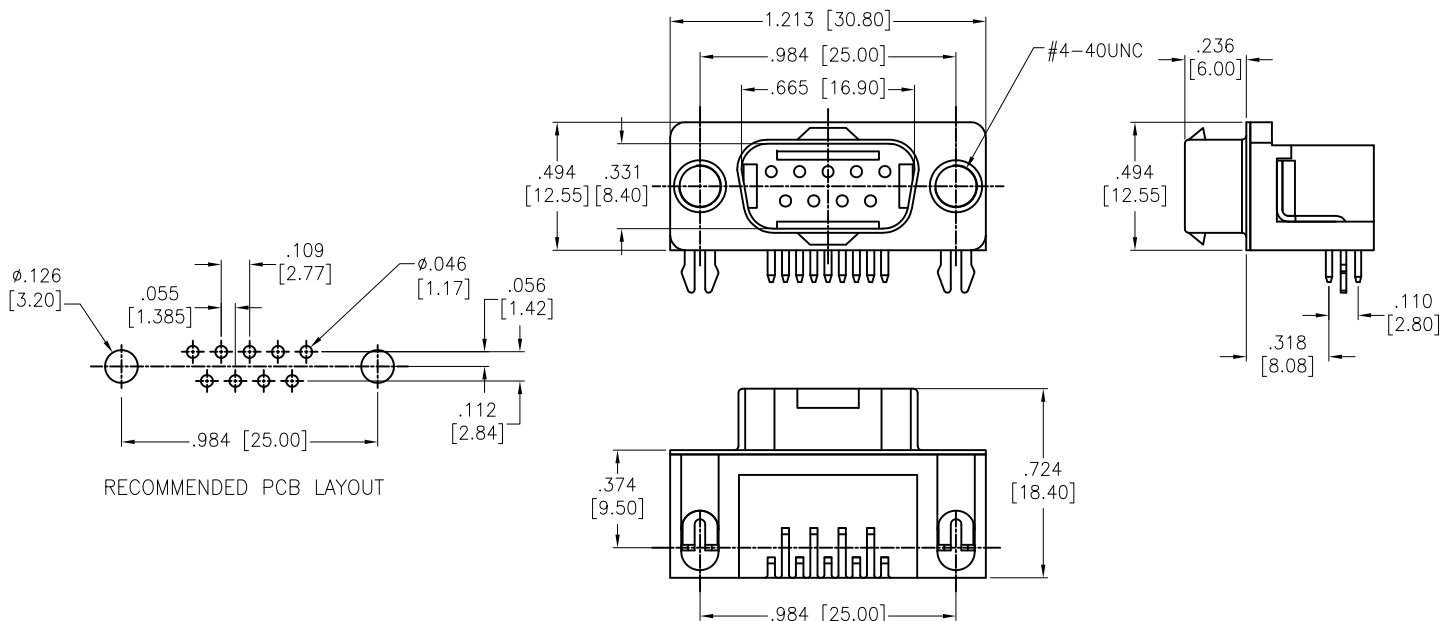

SPECIFICATIONS:

- Material:
- Insulator: PBT, rated UL 94V-0
- Insulator color: Black
- Contacts: Brass
- Shell: SPCC, Nickel plated
- Ground: Brass, Nickel plated
- Rivet: Brass, Nickel plated
- Plating:
- Gold flash over Nickel underplate on contact area,
- Tin over Nickel underplate on PCB tails
- Electrical:
- Voltage rating: 500 V
- Current rating: 3 A
- Temperature Rating:
- Operating temperature: -55°C to +105°C
- Environmental:
- Lead free, RoHS compliant



UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE INCHES [MM] TOLERANCES: EXCEPT AS NOTED		
INCHES HOLES		
.X ± .10	Ø.X ± .10	
.XX ± .020	Ø.XX ± .015	
.XXX ± .015	Ø.XXX ± .010	
APPROVALS		DATE
DRAWN	AY	12/22/18
CHECKED	TW	12/22/18
APPROVED		

ADAM TECH INTERCONNECTS 909 Rahway Avenue,
Union, NJ 07083
Phone: 908-687-5000
Fax: 908-687-5710

TITLE .318 [8.08] FOOTPRINT D-SUB MALE, 9PIN, #4-40, THREADED INSERT, FORKED BOARDLOCKS, W/BUMP		
SIZE X	PART NO. DE09-PL-24-BP	REV. -
REF: S00200T	SCALE: NTS	SHEET 1 OF 1

6

5

4

3

2

1