
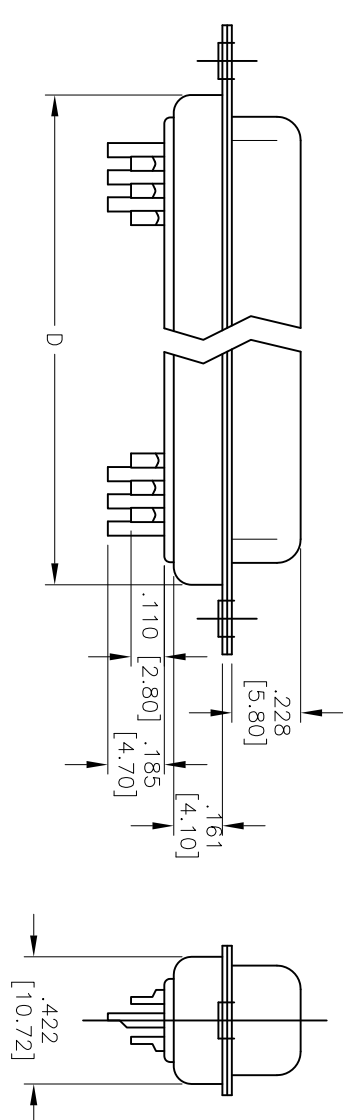


APPROVED: _____
 DATE: _____ TITLE: _____

Rev	AWO #	Description	Date	Appr
-		RELEASED	5/5/05	
A		REDRAWN	12/09/13	HR/GC
B		UPDATE SHAPE	12/5/14	AY

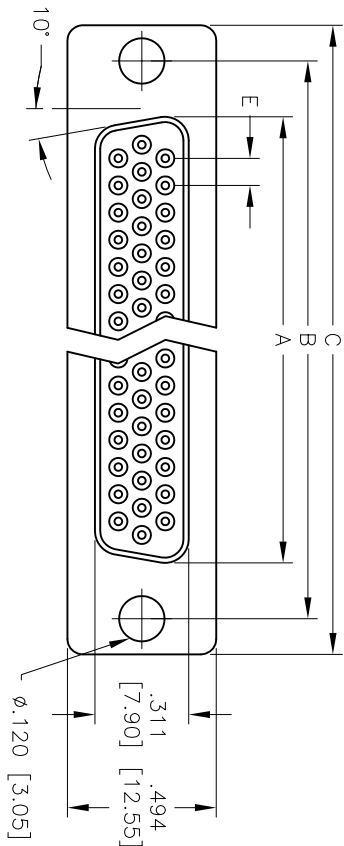

HDTXX	DIMENSIONS				
	A	B	C	D	E
15	.643 [16.33]	.984 [24.99]	1.213 [30.81]	.756 [19.20]	.090 [2.29]
26	.971 [24.66]	1.312 [33.32]	1.541 [39.14]	1.091 [27.70]	.090 [2.29]
44	1.511 [38.38]	1.852 [47.04]	2.088 [53.04]	1.618 [41.10]	.090 [2.29]
62	2.159 [54.84]	2.500 [63.50]	2.729 [69.32]	2.256 [57.30]	.095 [2.41]

SPECIFICATIONS:
 Material: Insulator: PBT, glass reinforced, rated UL 94V-0
 Insulator color: Black
 Contacts: Copper Alloy
 Shell: Steel, Tin plated
 Plating: Gold over Nickel underplate on contact area
 Electrical: Operating voltage: 250 VAC max
 Current rating: 3 Amps max
 Contact resistance: 20 mohms max @ 1 Amps DC
 Insulation resistance: 1,000 Mohms min @ 500 VDC
 Dielectric withstanding voltage: 1,000 VAC for 1 minute
 Environmental: Lead free, RoHS compliant

ADAM TECH

909 Rahway Avenue, Union, NJ 07083
 Phone: 908-687-5000 Fax: 908-687-5710

TITLE: HIGH DENSITY D-SUB SOCKET
 SOLDER CUP, .120 [3.05] MOUNTING HOLES

UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE INCHES [MM]	
TOLERANCES: EXCEPT AS NOTED	
INCHES	HOLE SIZES
.X ± .10	ØX ± .10
.XX ± .020	ØXXX ± .015
.XXX ± .015	ØXXXX ± .010
APPROVALS	DATE
DRAWN	SS
CHECKED	
APPROVED	

SIZE	PART NO.	HDTXX-SD	REV.
X			B
REF: S00087T	SCALE: NTS	SHEET 1 OF 1	

