
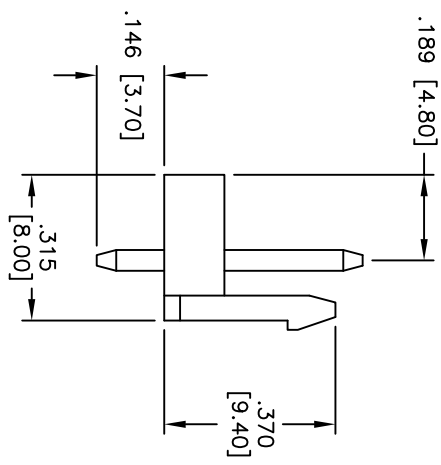
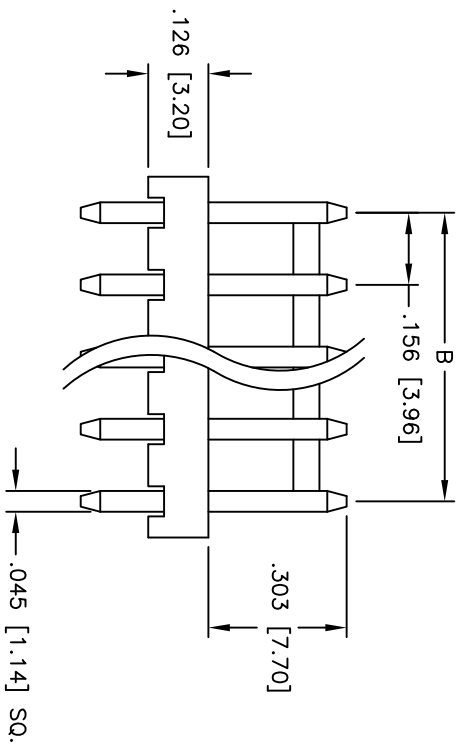
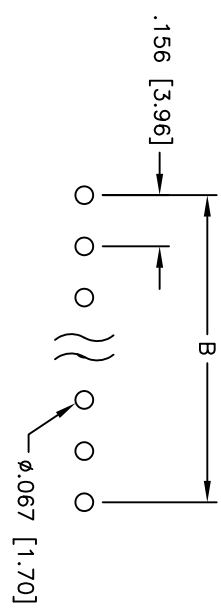


Rev	AWO #	Description	Date	Appr
-		RELEASED	1/14/09	

APPROVED: \_\_\_\_\_  
 DATE: \_\_\_\_\_ TITLE: \_\_\_\_\_

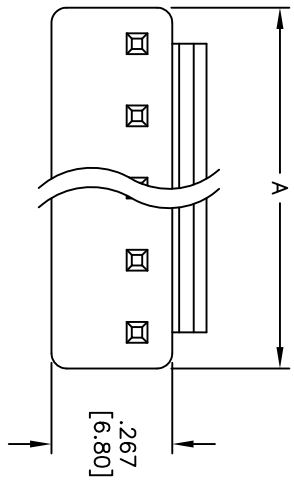

**SPECIFICATIONS:**

Material: Nylon 66, rated UL 94V-2  
 Insulator color: White  
 Contacts: Brass

Plating: Tin over Copper underplate overall

Electrical:  
 Operating voltage: 250 VAC max  
 Current rating: 7 Amps max

Contact resistance: 20 mohms max  
 Insulation resistance: 1,000 Mohms min

Dielectric withstanding voltage: 1,500 VAC for 1 minute

Temperature Rating:  
 Operating temperature: -25°C to +85°C

Environmental:  
 Lead free, RoHS compliant

Positions: 2 thru 12  
 A = .156 [3.96] x No. of Positions  
 B = .156 [3.96] x No. of Spaces

UNLESS OTHERWISE SPECIFIED  
 ALL DIMENSIONS ARE IN INCHES [MM]  
 TOLERANCES: EXCEPT AS NOTED

INCHES	HOLES
.X ± .10	ØX ± .10
.XX ± .020	ØXXX ± .015
.XXX ± .015	ØXXX ± .010

DRAWN		SS	1/4/09	TITLE		ADAM TECH	
CHECKED				909 Railway Avenue, Union, NJ 07083		Phone: 908-687-5000 Fax: 908-687-5710	
APPROVED				.156 [3.96] POWER HEADER		STRAIGHT, WITH REAR LOCK	
SIZE	PART NO.	LHC-XX-TS	SCALE: NTS	SHEET 1 OF 1	REV.		

