

6

5

4

3


2

1

APPROVED: \_\_\_\_\_

DATE: \_\_\_\_\_ TITLE: \_\_\_\_\_

Rev	AWO #	Description	Date	Appr
-		RELEASED	7/20/16	
A		UPDATE SPEC.	1/25/19	AY/YC

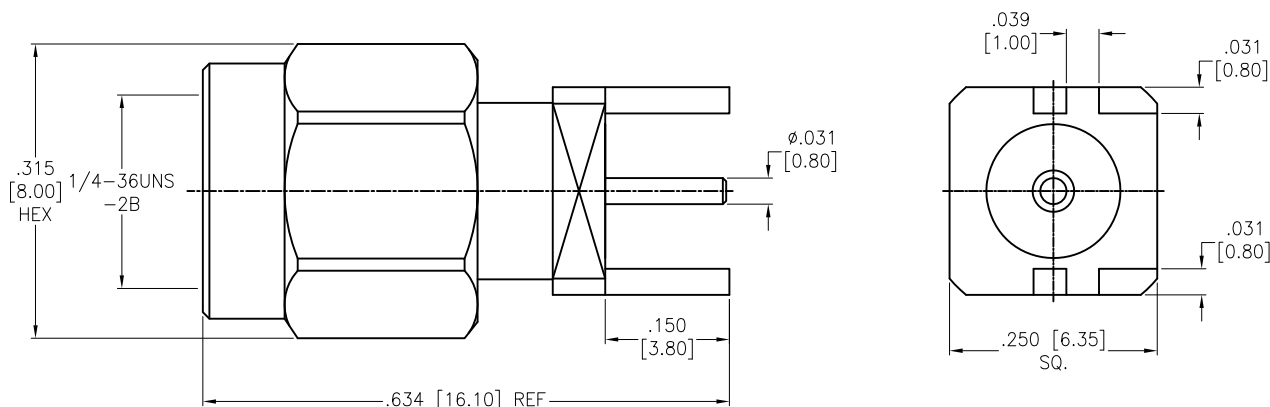

CONTACT PIN	BRASS	GOLD
SHELL	BRASS	GOLD
GASKET	SILICONE	RED
RING	SUS 304	NATURAL
INSULATOR	PTFE	WHITE
BODY	BRASS	GOLD
DESCRIPTION	MATERIAL	FINISH

**SPECIFICATIONS:**

Electrical:  
 Nominal Impedance: 50 ohms  
 Frequency range: DC-6 GHz  
 Working voltage: 335 VOLTS max.  
 Proof voltage: 1,000 VOLTS  
 Temperature Rating:  
 Operating temperature: -65°C to +165°C  
 Environmental:  
 Lead free, RoHS compliant.



MAX. BOARD THICKNESS=0.85mm

UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE INCHES [MM] TOLERANCES: EXCEPT AS NOTED INCHES HOLES		<b>ADAM</b> <b>TECH</b> <b>INTERCONNECTS</b>		909 Rahway Avenue, Union, NJ 07083 Phone: 908-687-5000 Fax: 908-687-5710	
.X ± .10    Ø.X ± .10 .XX ± .020    Ø.XX ± .015 .XXX ± .015    Ø.XXX ± .010		TITLE RF CONNECTOR, SMA STR EDGE MOUNT			
APPROVALS		DATE		SIZE	
DRAWN	AY	7/20/16		PART NO.	
CHECKED	SY	7/20/16		RF2-154-T-17-50-G	
APPROVED				REV.	A
REF: S00277T		SCALE: NTS		SHEET 1 OF 1	

6

5

4

3

2

1