

DC AXIAL FAN 80x80x38mm (Stator Outlet Blade)



Housing/Blade: Thermoplastic PBT, UL 94V-0
 Insulation Resistance: 10MΩ, 500VDC/min between bare wire and frame
 Dielectric Strength: 5mA max, 500VAC/min between bare wire and frame
 Operation Temperature: -20°C~70°C(Humidity 15%-90%RH)
 Storage Temperature: -40°C~85°C(Humidity 15%-90%RH)
 Lead Wire: UL Type #24 AWG
 Weight: 173 g





- High Airflow
- High Static Pressure

Model Number		Voltage (VDC)	Op. Voltage (VDC)	AirFlow (CFM)	Static Pres. (mm-H ₂ O)	Noise (dBA)	Speed (RPM)	Current (mA)	Power (W)	Available Bearing	Additional Function (See Page 3)	Curves
FD8038B12W3-11	★	12	7.0~13.2	48.30	7.60	40.90	3,400	240	2.88	B	P,X,Y	①
FD8038B12W5-11	★	12	7.0~13.2	59.80	11.40	46.30	4,200	380	4.56	B	P,X,Y	②
FD8038B12W7-11	★	12	7.0~13.2	70.20	15.40	50.70	4,900	580	6.96	B	P,X,Y	③
FD8038B12W9-11	★	12	7.0~13.2	82.40	20.80	54.20	5,700	800	9.60	B	P,X,Y	④
FD8038B24W3-11	★	24	12.0~26.4	48.30	7.60	40.90	3,400	130	3.12	B	P,X,Y	①
FD8038B24W5-11	★	24	12.0~26.4	59.80	11.40	46.30	4,200	200	4.80	B	P,X,Y	②
FD8038B24W7-11	★	24	12.0~26.4	70.20	15.40	50.70	4,900	280	6.72	B	P,X,Y	③
FD8038B24W9-11	★	24	12.0~26.4	82.40	20.80	54.20	5,700	420	10.08	B	P,X,Y	④
FD8038B48W3-11	★	48	24.0~56.0	48.30	7.60	40.90	3,400	80	3.84	B	P,X,Y	①
FD8038B48W5-11	★	48	24.0~56.0	59.80	11.40	46.30	4,200	110	5.28	B	P,X,Y	②
FD8038B48W7-11	★	48	24.0~56.0	70.20	15.40	50.70	4,900	150	7.20	B	P,X,Y	③
FD8038B48W9-11	★	48	24.0~56.0	82.40	20.80	54.20	5,700	200	9.60	B	P,X,Y	④

● If model depicts "★", auto restart protection function built in.

Specifications are subject to change without notice

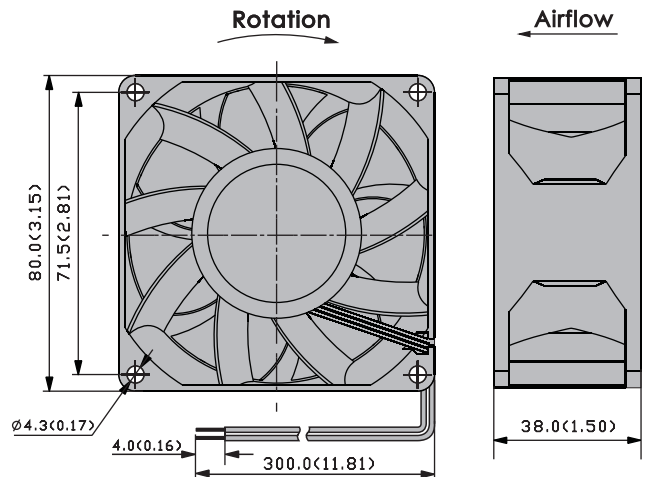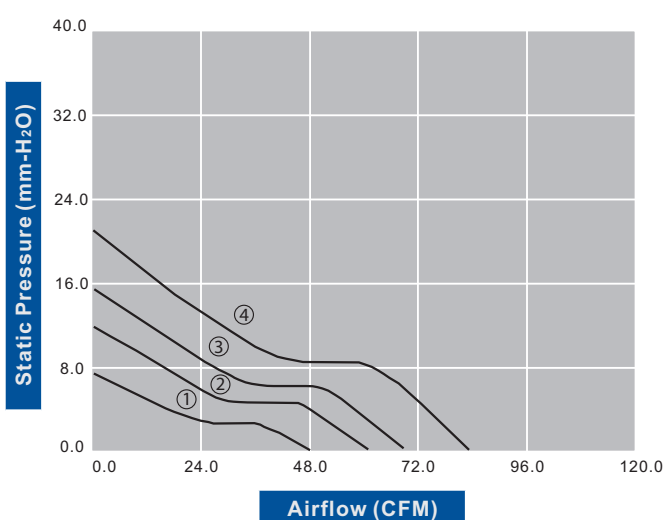

unit: mm(inch)