



Flachdichtung / gasket

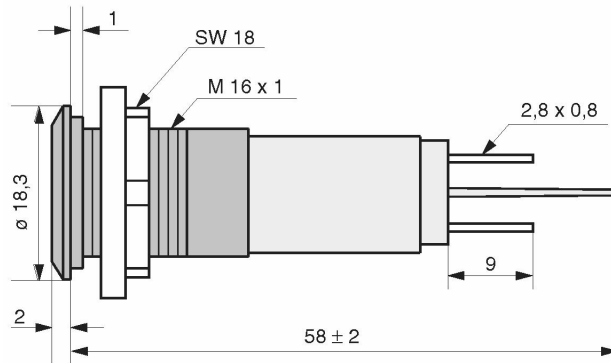

Flachdichtung / gasket

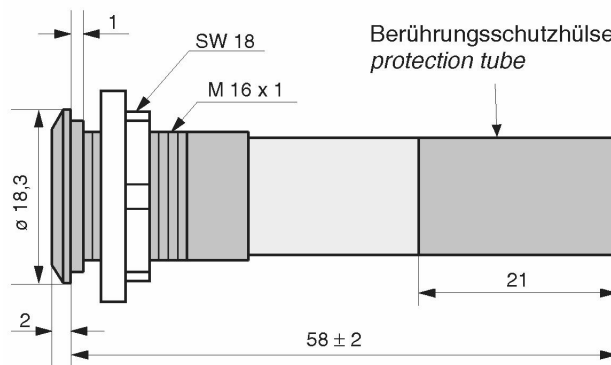

Mounting hole (inch)	10.2362"
Mounting hole (metric)	16mm
Indicator type	standard
Mounting type	with bezel
Bezel type	prominent
Bezel material	plastic
Bezel color	black
Bezel size	M16
Protection	IP67
Lens type	flat
Lens color	red diffused
Lens size	10mm
Connector Tpe	tab terminals 2.8x0.8

Drawn : ROJ	Ch'd : ROJ	Datasheet : 1941	Print date : 08/05/06
Revision :	Revision date : 2006-03-15	Name : ROJ	Scale :



Part Number : 19411230  
 Serial Number : 1941  
 LEDs Indicators

Connector number	2
Connector for lamp test	no
Number LED chip	6
Indicator color	red
Dom wave length	620nm
Peak Wave Lenght (mA)	
Op. voltage (V)	230V AC
Forward volt max.	
Rectifier	Half Wave
AC current	3mA
DC current	-
Lum in min (mcd)	
Lum in type (DC)	300mcd
Voltage tolerance (%)	10%
Op. temperature (°C)	-25°C...+60°C
Storage temperature (°C)	-25°C...+60°C
Narrative	with protection tube
Viewing angle (°)	

Drawn : ROJ	Ch'd : ROJ	Datasheet : 1941	Print date : 08/05/06
Revision :	Revision date : 2006-03-15	Name : ROJ	Scale :