




**T-1 1/4 All Glass PCB Mount Bi-Pin Incandescent Lamp with Filter Boot**

**DESCRIPTION AND FEATURES**

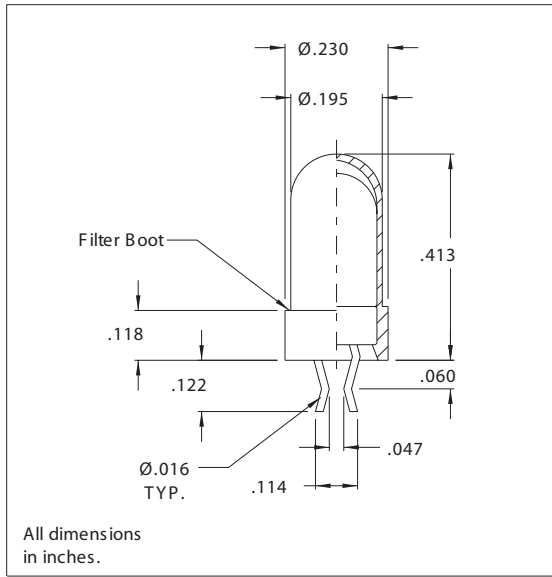

**ELECTRICAL CHARACTERISTICS**

Part Number	Design Voltage	Amps	MSCP* Nom.	Life Hours	Filament Type
D1R-1	5.0	.060	.05	40,000	C-2R
D1R-2	5.0	.075	.09	25,000	C-2R
D1R-3	5.0	.115	.15	30,000	C-2R
D1R-4	6.3	.100	.20	5,000	C-2R
D1R-5	6.3	.200	.40	40,000	C-2V
D1R-6	14.0	.040	.09	16,000	C-2V
D1R-7	14.0	.040	.12	16,000	C-2V
D1R-8	14.0	.040	.15	16,000	C-2V
D1R-9	14.0	.065	.16	10,000	C-2V
D1R-10	14.0	.080	.30	15,000	C-2V
D1R-11	14.0	.100	.50	10,000	C-2V
D1R-12	28.0	.035	.10	20,000	C-2F
D1R-13	28.0	.040	.30	4,000	C-2F

\* MSCP value is without filter boot.

Filter boots are formulated to meet specific color requirements. Please contact the factory for availability regarding your color needs.

Chicago Miniature Lamp reserves the right to make specification revisions that enhance the design and/or performance of the product