Type BLR-406-G **Fuse Block** 6 Pole - Regular, ATC/ATO Auto Blade With 6-Position Grounding Block



www.optifuse.com (619) 593-5050

Specifications:

Max Voltage: 32VDC Max Current Rating: 30A per Circuit - 100A Max **Fuse Type:** Regular Auto Blade (APR / ANR series) (Fuses or Circuit Breakers) Mounting: 4 mounting holes, 4.5mm diameter **Temperature Rating:** -20° C ~ +85° C


Mechanical Dimensions: Inches [mm]

Material:

Housing & Base: PBT, Black

Cover: PC. Clear Terminals: Tinned Copper Button: PA, Red

Note: Push down Button to open/close

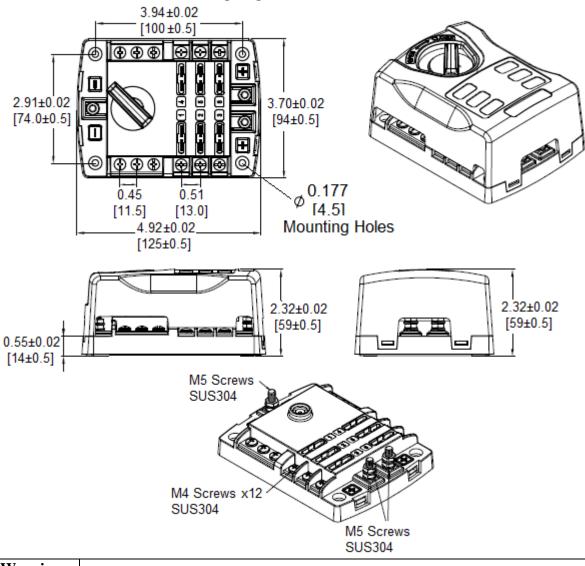



-Operation beyond the specified maximum ratings or improper use may result in damage and possible electrical arcing and/or flame.

-Avoid contact of device with chemical solvent. Prolonged contact may damage the device performance.