

# Type FXF Subminiature Fast Acting Fuse - 3.6 x 10mm



www.optifuse.com (619) 593-5050

### Agency Standards and Listings:



### Time Characteristics:

100%	4h Min.
200%	60s Max.


### Interrupt Rating:

200mA ~ 15A 50A at 350 VAC


### Packaging:

1,500 pieces taped and ammo pack

### Time Current Curve Graph

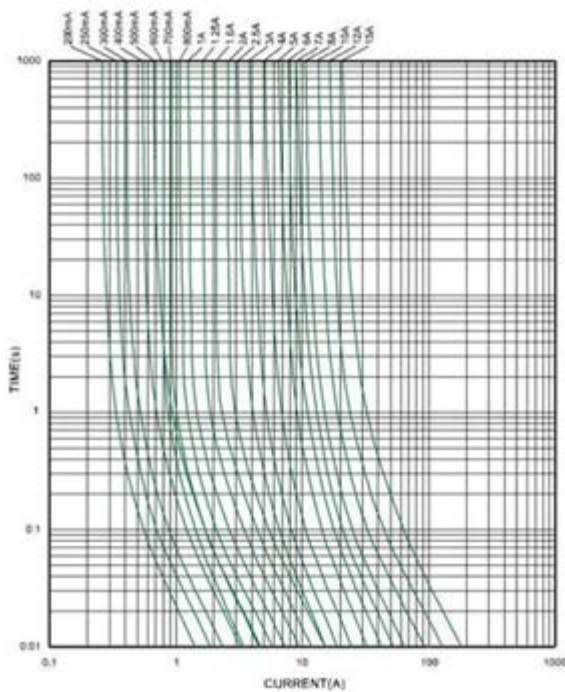

### Mechanical Dimensions:

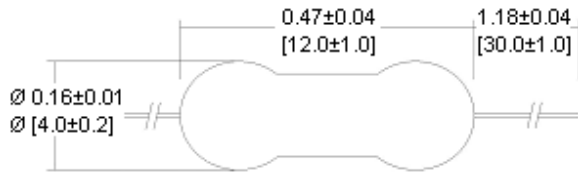

Epoxy Coated

Part Number	Amperage	Safety Approval		Rated Voltage (VAC)	I <sup>2</sup> T Reference A <sup>2</sup> Sec
		UL / CUL	CSA		
FXF-200mA	200mA		•	350V	0.0200
FXF-250mA	250mA		•		0.0352
FXF-300mA	300mA		•		0.0562
FXF-315mA	315mA		•		0.0620
FXF-350mA	350mA		•		0.0765
FXF-375mA	375mA		•		0.0878
FXF-400mA	400mA		•		0.107
FXF-500mA	500mA		•		0.219
FXF-600mA	600mA		•		0.118
FXF-630mA	630mA		•		0.130
FXF-700mA	700mA		•		0.208
FXF-750mA	750mA		•		0.239
FXF-800mA	800mA	•	•		0.319
FXF-1A	1A	•	•		0.542
FXF-1.2A	1.2A	•	•		0.746
FXF-1.25A	1.25A	•	•	0.776	
FXF-1.5A	1.5A	•	•	1.684	
FXF-1.6A	1.6A	•	•	1.763	
FXF-2A	2A	•	•	2.291	
FXF-2.25A	2.25A	•	•	2.912	
FXF-2.5A	2.5A	•	•	2.290	
FXF-3A	3A	•	•	3.548	
FXF-3.15A	3.15A	•	•	3.912	
FXF-3.5A	3.5A	•	•	4.856	
FXF-4A	4A	•	•	5.998	
FXF-5A	5A	•	•	10.57	
FXF-6A	6A	•	•	17.86	
FXF-6.3A	6.3A	•	•	19.69	
FXF-7A	7A	•	•	27.54	
FXF-8A	8A	•	•	41.28	
FXF-9A	9A	•	•	58.72	
FXF-10A	10A	•	•	85.90	
FXF-12A	12A	•	•	167.5	
FXF-15A	15A	•	•	325.0	

• Approved

<b>Warning:</b> 	-Operation beyond the specified maximum ratings or improper use may result in damage and possible electrical arcing and/or flame.
	-Avoid contact of Fuse device with chemical solvent. Prolonged contact may damage the device performance.