Type PMA-DS-06-SOS **Panel Mount Fuse Holder** 1/4" x 11/4" (6.3 x 32mm) Fuses **Driver / Screw**



www.optifuse.com

(619) 593-5050

Electrical Rating: 20A, 250V AC **Fuse Style:** 1/4" x 11/4" (6.3 x 32mm)


Material:

Frame and Cap: Nylon (UL flame: 94V-2)

Terminals: Nickel-plated brass Cap: Slotted Driver type, Screw type **Mounting:** Snap-in mounting **Terminal:** Solder tabs 6.4mm / 0.250"

Panel Thickness: 0.75 ~ 3.5mm **Agency Standards and Listings:**

Product Dimensions: Inches [mm]

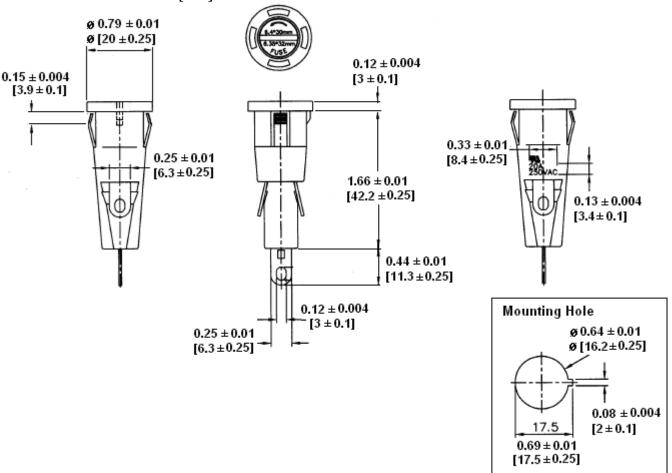

Warning:

-Operation beyond the specified maximum ratings or improper use may result in damage and possible electrical arcing and/or flame.



-Fuse Holders are not intended for circuit disconnect. All power should be disconnected before removing fuse.

-Avoid contact of Fuse Holder with chemical solvent. Prolonged contact may damage the device performance.