


FEATURES

- ▶ Ultra Compact Size 1.0" x 1.0" x 0.64"
- ▶ Fully Encapsulated Plastic Case for PCB Mounting
- ▶ Universal Input 85-264VAC
- ▶ I/O Isolation 3000VAC with Reinforced Insulation
- ▶ Operating Ambient Temp. Range -25°C to +70°C
- ▶ No Min. Load Requirement
- ▶ Overload/Voltage and Short Circuit Protection
- ▶ EMI Emission EN 55032/14-1 Class B Approved
- ▶ EMS Immunity EN 61000-4-2,3,4,5,6,8,11 Approved
- ▶ Eco Design, Low No Load Power Consumption < 150mW
- ▶ UL/cUL/IEC/EN 62368-1(60950-1), TUV/IEC/EN 60335-1 Safety Approval & CE Marking

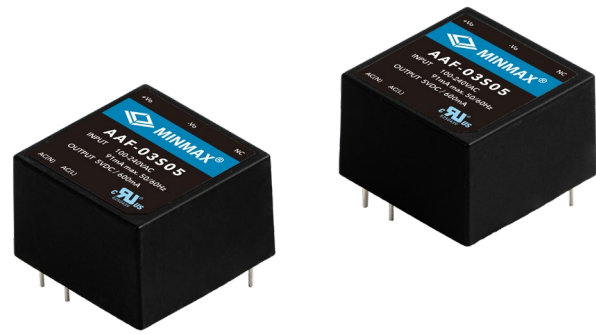

PRODUCT OVERVIEW

The AAF-03 Series from MINMAX is a range of ultra-small, fully encapsulated 3 Watt AC-DC power supply modules. They are designed for easy PCB mounting with solder pins. The modules feature EMI emission EN 55032/14-1 Class B approved. EMC immunity complies with EN 61000-6-1. The low stand-by power consumption complies with European ErP Directive 2009/125/EC. This series comply with international standard pinout and input voltage range of 85-264VAC for worldwide markets. The AAF-03 series provide a better solution for space critical applications in consumer appliances and instrumentation and communication equipment.

Model Selection Guide

Model Number	Output Voltage VDC	Output Current		Input Current @Max. Load mA(typ.)	Max. capacitive Load µF	Efficiency (typ.) @Max. Load %
		Max. mA	Peak ₍₁₎ mA			
		AAF-03S03	3.3	900	1170	62
AAF-03S05	5	600	780	61	820	72
AAF-03S09	9	333	430	57	470	77
AAF-03S12	12	250	320	56	330	78
AAF-03S15	15	200	260	56	270	78
AAF-03S24	24	125	160	56	180	78

Input Specifications

Parameter	Conditions / Model	Min.	Typ.	Max.	Unit
Input Voltage Range	All Models	85	---	264	VAC
Input Frequency Range		47	---	63	Hz
Input Voltage Range		120	---	370	VDC
No-Load Power Consumption		---	---	150	mW
Inrush Current (Cold Start at 25°C)		115VAC	---	---	15
	230VAC	---	---	25	A

Output Specifications

Parameter	Conditions	Min.	Typ.	Max.	Unit
Output Voltage Accuracy		---	---	±2.0	%Vnom.
Line Regulation	Vin=Min. to Max. @Full Load	---	---	±1.0	%
Load Regulation	Io=0% to 100%	---	---	±1.0	%
Ripple & Noise	0-20 MHz Bandwidth	---	---	70	mV _{P-P}
Minimum Load	No minimum Load Requirement				
Over Voltage Protection	Zener Diode Clamp	---	125	---	% of Vo
Temperature Coefficient		---	---	±0.05	%/°C
Overshoot		---	---	5	%Vout
Over Load Protection	Hiccup mode, auto-recovery	135	150	---	%Inom.
	(long term overload condition may cause damage)				
Short Circuit Protection	Hiccup mode, Automatic Recovery				

General Specifications

Parameter	Conditions	Min.	Typ.	Max.	Unit
I/O Isolation Voltage	60 Seconds	3000	---	---	VAC
I/O Isolation Resistance	500 VDC	100	---	---	MΩ
Switching Frequency		---	65	---	kHz
Hold-up Time	115VAC, Full Load	---	8	---	ms
MTBF (calculated)	MIL-HDBK-217F@25°C, Ground Benign	1,200,000			Hours
Safety Approvals	UL/cUL 60950-1 recognition (UL certificate), IEC/EN 60950-1 (CB-report)				
	UL/cUL 62368-1 recognition (UL certificate), IEC/EN 62368-1 (CB-report)				
	IEC/EN 60335-1 recognition (CB-report, TUV certificate)				

EMC Specifications

Parameter	Standards & Level			Performance
	Conduction	Radiation		
EMI	Conduction	EN 55014-1, EN 55032	Without external components	Class B
	Radiation			
EMS	EN 55014-2, EN 55035			
	ESD	EN 61000-4-2 Air ± 8kV, Contact ± 4kV		A
	Radiated immunity	EN 61000-4-3 10V/m		A
	Fast transient	EN 61000-4-4 ±2kV		A
	Surge	EN 61000-4-5 ±1kV		A
	Conducted immunity	EN 61000-4-6 10Vrms		A
	PFMF	EN 61000-4-8 30A/m		A
	Dips	EN 61000-4-11 30% 10ms		A
	Interruptions	EN 61000-4-11 >95% 5000ms		B


Environmental Specifications

Parameter	Conditions	Min.	Max.	Unit
Operating Ambient Temperature Range		-25	+70	°C
Storage Temperature Range		-40	+85	°C
Power Derating	+60°C to +70°C	0.15		W / °C
Humidity (non condensing)		---	95	% rel. H
Lead Temperature (1.5mm from case for 10Sec.)		---	260	°C

Notes

- Peak load lasting <30s with a maximum duty cycle of 10%, average output power not to exceed maximum power.
- All specifications typical at Ta=+25°C, resistive load, 115VAC, 60Hz input voltage and after warm-up time rated output current unless otherwise noted.
- We recommend to protect the converter by a slow blow fuse in the input supply line.
- Other input and output voltage may be available, please contact MINMAX.
- Specifications are subject to change without notice.

Package Specifications

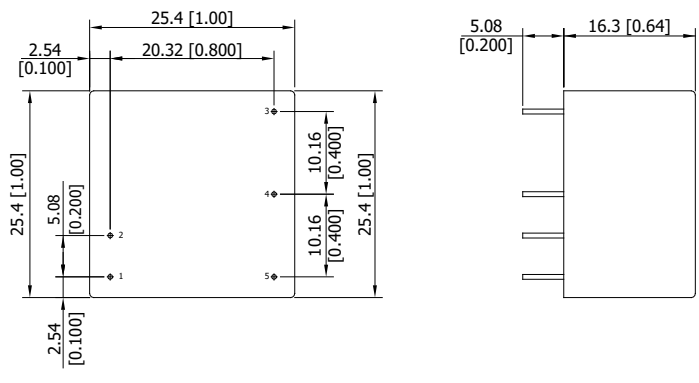Mechanical Dimensions		Pin Connections																			
		<table border="1"> <thead> <tr> <th>Pin</th> <th>Function</th> <th>Diameter mm (inches)</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>AC (N)</td> <td>∅ 0.6 [0.02]</td> </tr> <tr> <td>2</td> <td>AC (L)</td> <td>∅ 0.6 [0.02]</td> </tr> <tr> <td>3</td> <td>NC</td> <td>∅ 0.6 [0.02]</td> </tr> <tr> <td>4</td> <td>-Vout</td> <td>∅ 0.6 [0.02]</td> </tr> <tr> <td>5</td> <td>+Vout</td> <td>∅ 0.6 [0.02]</td> </tr> </tbody> </table> <p style="text-align: center;">NC: No Connection</p> <ul style="list-style-type: none"> ▶ All dimensions in mm (inches) ▶ Tolerance: ±0.5 (±0.02) ▶ Pin pitch tolerance: ±0.25 (±0.01) ▶ Pin diameter tolerance: X.X±0.1 (X.XX±0.004) 		Pin	Function	Diameter mm (inches)	1	AC (N)	∅ 0.6 [0.02]	2	AC (L)	∅ 0.6 [0.02]	3	NC	∅ 0.6 [0.02]	4	-Vout	∅ 0.6 [0.02]	5	+Vout	∅ 0.6 [0.02]
Pin	Function	Diameter mm (inches)																			
1	AC (N)	∅ 0.6 [0.02]																			
2	AC (L)	∅ 0.6 [0.02]																			
3	NC	∅ 0.6 [0.02]																			
4	-Vout	∅ 0.6 [0.02]																			
5	+Vout	∅ 0.6 [0.02]																			

Physical Characteristics

Case Size	: 25.4x25.4x16.3mm (1.0x1.0x0.64 inches)
Case Material	: Plastic resin (flammability to UL 94V-0 rated)
Pin Material	: Copper Alloy
Weight	: 17.4g