

FEATURES

- ▶ Smallest Encapsulated 30W Converter
- ▶ Ultra-compact 1"x1" Package
- ▶ Ultra-wide 4:1 Input Voltage Range
- ▶ Fully Regulated Output Voltage
- ▶ Excellent Efficiency up to 90%
- ▶ I/O Isolation 1500 VDC
- ▶ Operating Ambient Temp. Range -40°C to +80°C
- ▶ No Min. Load Requirement
- ▶ Very low no load power consumption
- ▶ Under-voltage, Overload/Voltage and Short Circuit Protection
- ▶ Remote On/Off Control, Output Voltage Trim
- ▶ Shielded Metal Case with Insulated Baseplate
- ▶ UL/cUL/IEC/EN 62368-1 Safety Approval & CE Marking

NEW

 CE cULus CB
 UL 62368-1 Scheme

PRODUCT OVERVIEW

The MINMAX MJWI30 series is the latest range of a new generation of 30Watt isolated DC-DC power modules with ultra-wide input range of 9-36 / 18-75Vin and 14 models available for 3.3/5/12/15/24/±12/±15VDC tightly output voltage in a highest power density 75W/in³ and ultra-compact size with dimensions of just 1.0"x1.0"x0.4" shielded and encapsulated package. Key performance featuring high efficiency up to 90%, operating ambient temp. range of -40°C to +80°C, no min. load requirement, very low no-load power consumption, remote on/off, output voltage trim, build-in fault condition protection include under-voltage, overload, over voltage and short circuit protection.

The MJWI30 series has been intensely qualified to safety approval UL/cUL/IEC/EN 62368-1 with CB report and CE marking which offer a solution for the applications where wide input voltage range, high efficiency for wide operating ambient temp. range, isolated power with fault condition protection, shield and encapsulated package and very board space limited / critical are required.

Model Selection Guide

| Model Number | Input Voltage (Range) VDC | Output Voltage VDC | Output Current Max. mA | Input Current | | Over Voltage Protection VDC | Max. capacitive Load μF | Efficiency (typ.) % |
|---------------|------------------------------|-----------------------|------------------------------|------------------------|----------------------|--------------------------------|----------------------------|------------------------|
| | | | | @Max. Load mA(typ.) | @No Load mA(typ.) | | | |
| | | | | @Max. Load mA(typ.) | @No Load mA(typ.) | | | |
| MJWI30-24S033 | 24 (9 ~ 36) | 3.3 | 7000 | 1106 | 10 | 3.9 | 10000 | 87 |
| MJWI30-24S05 | | 5 | 6000 | 1420 | 10 | 6.2 | 7200 | 88 |
| MJWI30-24S12 | | 12 | 2500 | 1420 | 10 | 15 | 1250 | 88 |
| MJWI30-24S15 | | 15 | 2000 | 1420 | 10 | 18 | 800 | 88 |
| MJWI30-24S24 | | 24 | 1250 | 1420 | 10 | 30 | 330 | 88 |
| MJWI30-24D12 | | ±12 | ±1250 | 1420 | 10 | ±15 | 680# | 88 |
| MJWI30-24D15 | | ±15 | ±1000 | 1404 | 10 | ±18 | 470# | 88 |
| MJWI30-48S033 | 48 (18 ~ 75) | 3.3 | 7000 | 553 | 8 | 3.9 | 10000 | 87 |
| MJWI30-48S05 | | 5 | 6000 | 702 | 8 | 6.2 | 7200 | 88 |
| MJWI30-48S12 | | 12 | 2500 | 702 | 8 | 15 | 1250 | 90 |
| MJWI30-48S15 | | 15 | 2000 | 702 | 8 | 18 | 800 | 90 |
| MJWI30-48S24 | | 24 | 1250 | 694 | 8 | 30 | 330 | 90 |
| MJWI30-48D12 | | ±12 | ±1250 | 694 | 8 | ±15 | 680# | 90 |
| MJWI30-48D15 | | ±15 | ±1000 | 694 | 8 | ±18 | 470# | 90 |

For each output

| Input Specifications | | | | | | |
|----------------------------------|---|------------------|------|------|------|--|
| Parameter | Conditions / Model | Min. | Typ. | Max. | Unit | |
| Input Surge Voltage (100ms max.) | 24V Input Models | -0.7 | --- | 50 | VDC | |
| | 48V Input Models | -0.7 | --- | 100 | | |
| Start-Up Threshold Voltage | 24V Input Models | --- | --- | 9 | | |
| | 48V Input Models | --- | --- | 18 | | |
| Start Up Time (Power On) | Nominal Vin and Constant Resistive Load | --- | --- | 30 | ms | |
| Input Filter | All Models | Internal Pi Type | | | | |

| Remote On/Off Control | | | | | | |
|-----------------------------|------------------------------|------|------|------|------|--|
| Parameter | Conditions | Min. | Typ. | Max. | Unit | |
| Converter On | 3.5V ~ 12V or Open Circuit | | | | | |
| Converter Off | 0V ~ 1.2V or Short Circuit | | | | | |
| Control Input Current (on) | Vctrl = 5.0V | --- | --- | 0.5 | mA | |
| Control Input Current (off) | Vctrl = 0V | --- | --- | -0.5 | mA | |
| Control Common | Referenced to Negative Input | | | | | |
| Standby Input Current | Nominal Vin | --- | 2 | --- | mA | |

| Output Specifications | | | | | | |
|---------------------------------|---|---|------|-------|---------|-------------------|
| Parameter | Conditions / Model | Min. | Typ. | Max. | Unit | |
| Output Voltage Setting Accuracy | | --- | --- | ±1.0 | %Vnom. | |
| Output Voltage Balance | Dual Output, Balanced Loads | --- | --- | ±2.0 | % | |
| Line Regulation | Vin=Min. to Max. @Full Load | Single Output | --- | --- | ±0.2 | % |
| | | Dual Output | --- | --- | ±0.5 | % |
| Load Regulation | Io=0% to 100% | Single Output | --- | --- | ±0.2 | % |
| | | Dual Output | --- | --- | ±1.0 | % |
| Cross Regulation (Dual) | Asymmetrical Load 25% / 100% FL | --- | --- | ±5.0 | % | |
| Minimum Load | No minimum Load Requirement | | | | | |
| Ripple & Noise | 20 MHz Bandwidth | Measured with a 0.1µF/50V MLCC and a 47µF/50V MLCC. | --- | --- | 75 | mV _{P-P} |
| Transient Recovery Time | 25% Load Step Change | --- | 250 | --- | µsec | |
| Transient Response Deviation | | --- | ±3 | ±5 | % | |
| Temperature Coefficient | | --- | --- | ±0.02 | %/°C | |
| Trim Up / Down Range | % of Nominal Output Voltage | --- | --- | ±10 | % | |
| Over Load Protection | Hiccup | --- | 150 | --- | % | |
| Over Voltage Protection | Zener Diode Clamp | --- | 125 | --- | % of Vo | |
| Short Circuit Protection | Continuous, Automatic Recovery (Hiccup Mode 0.6Hz typ.) | | | | | |

| General Specifications | | | | | | |
|--|---|-----------|------|------|-------|--|
| Parameter | Conditions | Min. | Typ. | Max. | Unit | |
| I/O Isolation Voltage | 60 Seconds | 1500 | --- | --- | VDC | |
| | 1 Second | 1800 | --- | --- | VDC | |
| Isolation Voltage Input/Output to case | 60 Seconds | 1000 | --- | --- | VDC | |
| I/O Isolation Resistance | 500 VDC | 1000 | --- | --- | MΩ | |
| I/O Isolation Capacitance | 100kHz, 1V | --- | --- | 1500 | pF | |
| Switching Frequency | 3.3 Vo Models | 158 | 175 | 193 | kHz | |
| | 5 Vo Models | 223 | 248 | 273 | kHz | |
| | 12 & 15 & 24 & Dual Vo Models | 257 | 285 | 314 | kHz | |
| MTBF(calculated) | MIL-HDBK-217F@25°C, Ground Benign | 1,310,710 | --- | --- | Hours | |
| Safety Approvals | UL/cUL 62368-1 recognition (UL certificate), IEC/EN 62368-1 | | | | | |





EMC Specifications

| Parameter | Standards & Level | | | Performance | |
|--------------------|--|--------------------------------------|------------------------------|---------------|---|
| EMI _(s) | Conduction | EN 55032 | With external components | Class A | |
| | Radiation | | | | |
| EMS _(s) | EN 55035 | | | | |
| | ESD | Direct discharge | Indirect discharge HCP & VCP | | |
| | | EN61000-4-2 Air ± 8kV, Contact ± 6kV | | Contact ± 6kV | |
| | Radiated immunity | EN 61000-4-3 10V/m | | | A |
| | Fast transient | EN 61000-4-4 ±2kV | | | A |
| | Surge | EN 61000-4-5 ±2kV | | | A |
| | Conducted immunity | EN 61000-4-6 10Vrms | | | A |
| PFMF | EN61000-4-8 100A/m Continuous; 1000A/m 1sec. | | | A | |

Environmental Specifications


| Parameter | Model | Min. | Max. | | Unit |
|--|--|------|------------------|---------------|----------|
| | | | without Heatsink | with Heatsink | |
| Operating Ambient Temperature Range Nominal Vin, Load 100% Inom. (for Power Derating see relative Derating Curves) | MJWI30-24S05, MJWI30-24S12, MJWI30-24S15 MJWI30-24S24, MJWI30-24D12, MJWI30-24D15 MJWI30-48S05 | -40 | 60 | 65 | °C |
| | MJWI30-24S033, MJWI30-48S033, MJWI30-48S12 MJWI30-48S15, MJWI30-48S24, MJWI30-48D12 MJWI30-48D15 | | 65 | 70 | |
| Case Temperature | | --- | +105 | | °C |
| Storage Temperature Range | | -55 | +125 | | °C |
| Humidity (non condensing) | | --- | 95 | | % rel. H |
| Lead Temperature (1.5mm from case for 10 sec.) | | --- | 260 | | °C |

Power Derating Curve
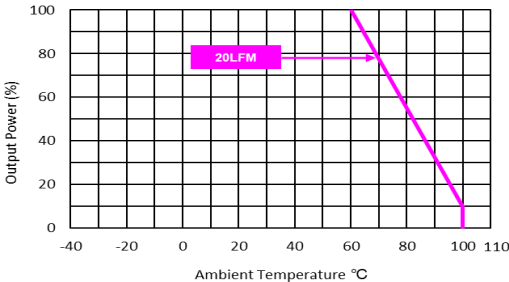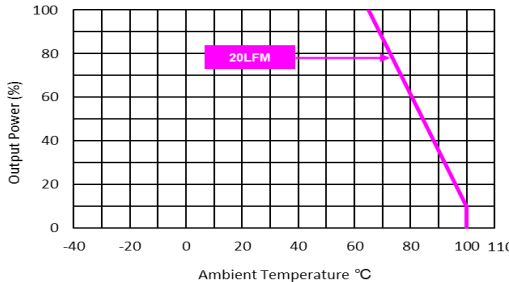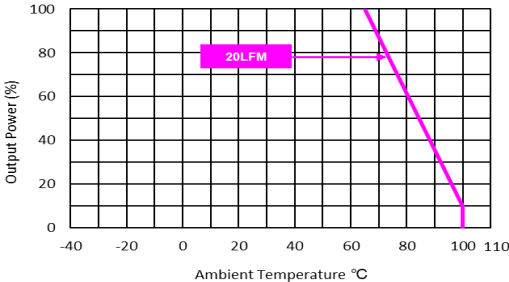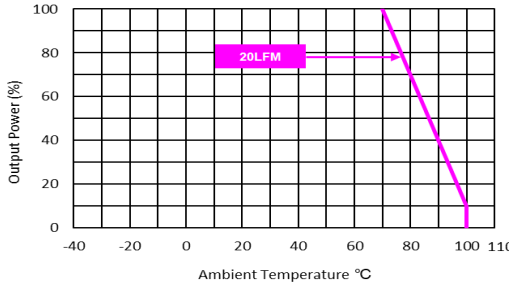
| | |
|---|--|
|  |  |
| MJWI30-24S05, MJWI30-24S12, MJWI30-24S15, MJWI30-24S24 MJWI30-24D12, MJWI30-24D15, MJWI30-48S05 Derating Curve without Heatsink | MJWI30-24S05, MJWI30-24S12, MJWI30-24S15, MJWI30-24S24 MJWI30-24D12, MJWI30-24D15, MJWI30-48S05 Derating Curve with Heatsink |
|  |  |
| MJWI30-24S033, MJWI30-48S033, MJWI30-48S12, MJWI30-48S15 MJWI30-48S24, MJWI30-48D12, MJWI30-48D15 Derating Curve without Heatsink | MJWI30-24S033, MJWI30-48S033, MJWI30-48S12, MJWI30-48S15 MJWI30-48S24, MJWI30-48D12, MJWI30-48D15 Derating Curve with Heatsink |

Notes

- 1 Specifications typical at $T_a=+25^{\circ}\text{C}$, resistive load, nominal input voltage, rated output current unless otherwise noted.
- 2 Transient recovery time is measured to within 1% error band for a step change in output load of 75% to 100%.
- 3 We recommend to protect the converter by a slow blow fuse in the input supply line.
- 4 Other input and output voltage may be available, please contact MINMAX.
- 5 The external components might be required to meet EMI/EMS standard for some of test items. Please contact MINMAX for the solution in detail.
- 6 Specifications are subject to change without notice.
- 7 The repeated high voltage isolation testing of the converter can degrade isolation capability, to a lesser or greater degree depending on materials, construction, environment and reflow solder process. Any material is susceptible to eventual chemical degradation when subject to very high applied voltages thus implying that the number of tests should be strictly limited. We therefore strongly advise against repeated high voltage isolation testing, but if it is absolutely required, that the voltage be reduced by 20% from specified test voltage. Furthermore, the high voltage isolation capability after reflow solder process should be evaluated as it is applied on system.

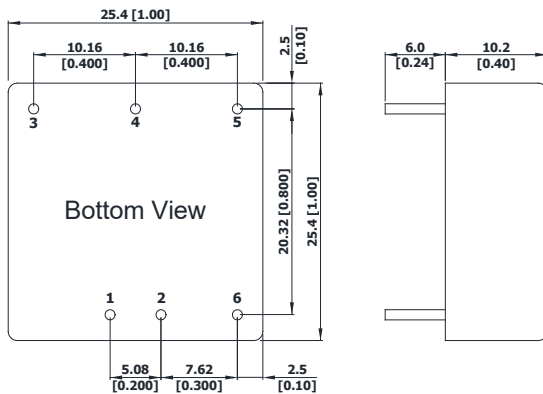Package Specifications
Mechanical Dimensions

Pin Connections

| Pin | Single Output | Dual Output | Diameter mm (inches) |
|-----|---------------|---------------|-------------------------|
| 1 | +Vin | +Vin | ∅ 1.0 [0.04] |
| 2 | -Vin | -Vin | ∅ 1.0 [0.04] |
| 3 | +Vout | +Vout | ∅ 1.0 [0.04] |
| 4 | Trim | Common | ∅ 1.0 [0.04] |
| 5 | -Vout | -Vout | ∅ 1.0 [0.04] |
| 6 | Remote On/Off | Remote On/Off | ∅ 1.0 [0.04] |

- ▶ All dimensions in mm (inches)
- ▶ Tolerance: X.X±0.5 (X.XX±0.02)
X.XX±0.25 (X.XXX±0.01)
- ▶ Pin diameter tolerance: X.X±0.05 (X.XX±0.002)

Physical Characteristics


Case Size : 25.4x25.4x10.2mm (1.0x1.0x0.4 inches)

Case Material : Metal With Non-Conductive Baseplate

Base Material : FR4 PCB (flammability to UL 94V-0 rated)

Pin Material : Copper

Weight : 25g

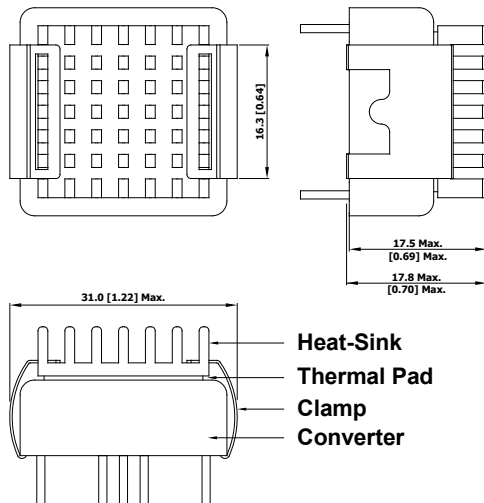
Heatsink (Option -HS)
Mechanical Dimensions


Heatsink Material: Aluminum
Finish: Anodic treatment (black)
Weight: 2g

- ▶ The advantages of adding a heatsink are:
 1. To improve heat dissipation and increase the stability and reliability of the DC-DC converters at high operating temperatures.
 2. To increase Operating temperature of the DC-DC converter, please refer to Derating Curve.


External Output Trimming

Output can be externally trimmed by using the method shown below

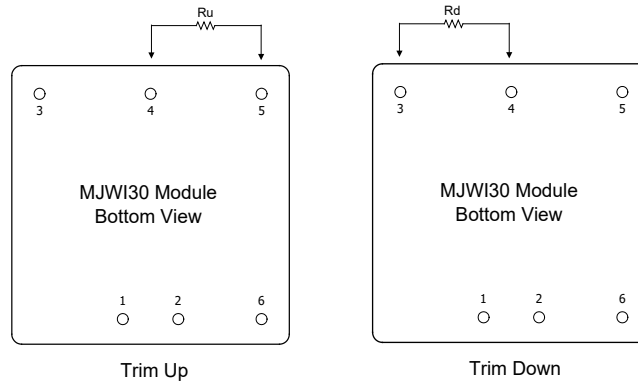

| Trim Range (%) | MJWI30-XXS033 | | MJWI30-XXS05 | | MJWI30-XXS12 | | MJWI30-XXS15 | | MJWI30-XXS24 | |
|----------------|----------------|--------------|----------------|--------------|----------------|--------------|----------------|--------------|----------------|--------------|
| | Trim down (kΩ) | Trim up (kΩ) | Trim down (kΩ) | Trim up (kΩ) | Trim down (kΩ) | Trim up (kΩ) | Trim down (kΩ) | Trim up (kΩ) | Trim down (kΩ) | Trim up (kΩ) |
| 1 | 72.64 | 60.49 | 139.38 | 107.37 | 413.55 | 351.00 | 530.73 | 422.77 | 598.65 | 487.13 |
| 2 | 32.49 | 27.14 | 62.91 | 48.26 | 184.55 | 157.50 | 238.61 | 189.89 | 267.77 | 218.01 |
| 3 | 19.10 | 16.03 | 37.42 | 28.56 | 108.22 | 93.00 | 141.24 | 112.26 | 157.48 | 128.30 |
| 4 | 12.41 | 10.47 | 24.68 | 18.71 | 70.05 | 60.75 | 92.56 | 73.44 | 102.33 | 83.45 |
| 5 | 8.39 | 7.14 | 17.03 | 12.80 | 47.15 | 41.40 | 63.35 | 50.15 | 69.24 | 56.54 |
| 6 | 5.72 | 4.91 | 11.94 | 8.86 | 31.88 | 28.50 | 43.87 | 34.63 | 47.18 | 38.60 |
| 7 | 3.80 | 3.33 | 8.29 | 6.05 | 20.98 | 19.29 | 29.96 | 23.54 | 31.43 | 25.78 |
| 8 | 2.37 | 2.14 | 5.56 | 3.94 | 12.80 | 12.37 | 19.53 | 15.22 | 19.61 | 16.17 |
| 9 | 1.25 | 1.21 | 3.44 | 2.29 | 6.44 | 7.00 | 11.41 | 8.75 | 10.42 | 8.69 |
| 10 | 0.36 | 0.47 | 1.74 | 0.98 | 1.35 | 2.70 | 4.92 | 3.58 | 3.07 | 2.71 |


| Order Code Table | |
|------------------|------------------|
| Standard | With heatsink |
| MJWI30-24S033 | MJWI30-24S033-HS |
| MJWI30-24S05 | MJWI30-24S05-HS |
| MJWI30-24S12 | MJWI30-24S12-HS |
| MJWI30-24S15 | MJWI30-24S15-HS |
| MJWI30-24S24 | MJWI30-24S24-HS |
| MJWI30-24D12 | MJWI30-24D12-HS |
| MJWI30-24D15 | MJWI30-24D15-HS |
| MJWI30-48S033 | MJWI30-48S033-HS |
| MJWI30-48S05 | MJWI30-48S05-HS |
| MJWI30-48S12 | MJWI30-48S12-HS |
| MJWI30-48S15 | MJWI30-48S15-HS |
| MJWI30-48S24 | MJWI30-48S24-HS |
| MJWI30-48D12 | MJWI30-48D12-HS |
| MJWI30-48D15 | MJWI30-48D15-HS |

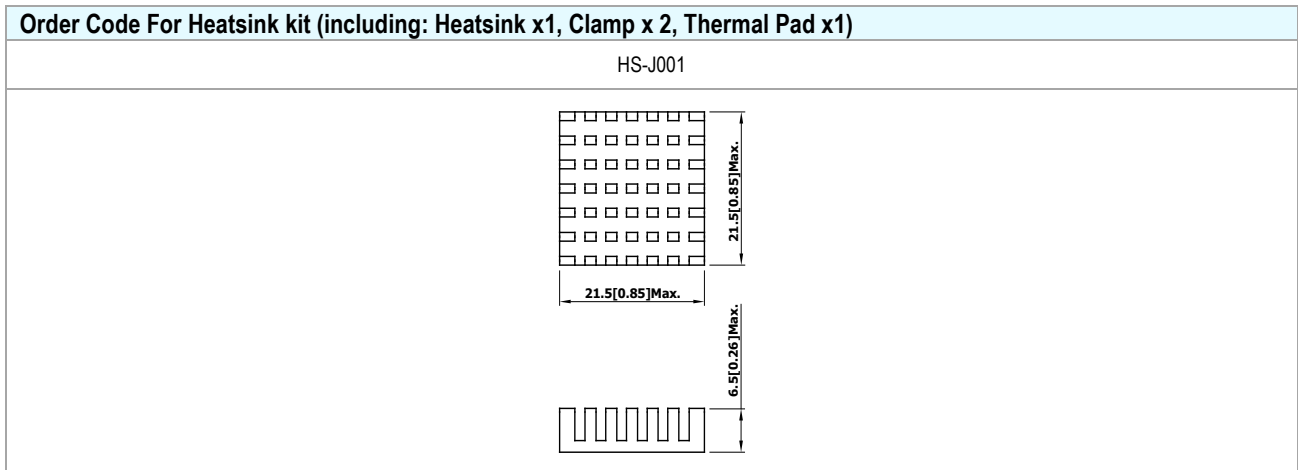

Test Setup



Input Reflected-Ripple Current Test Setup

Input reflected-ripple current is measured with an inductor L_{in} (4.7 μ H) and C_{in} (220 μ F, ESR < 1.0 Ω at 100 kHz) to simulate source impedance. Capacitor C_{in} offsets possible battery impedance. Current ripple is measured at the input terminals of the module, measurement bandwidth is 0-500 kHz.

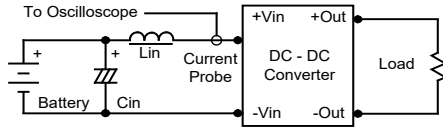

Peak-to-Peak Output Noise Measurement Test

Use a 47 μ F and 0.1 μ F ceramic capacitor. Scope measurement should be made by using a BNC socket, measurement bandwidth is 0-20 MHz. Position the load between 50 mm and 75 mm from the DC-DC Converter.

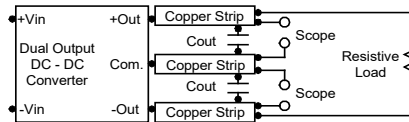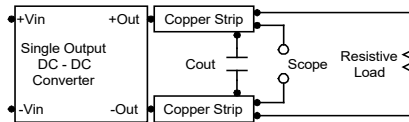

Technical Notes

Remote On/Off

Positive logic remote on/off turns the module on during a logic high voltage on the remote on/off pin, and off during a logic low. To turn the power module on and off, the user must supply a switch to control the voltage between the on/off terminal and the -Vin terminal.

The switch can be an open collector or equivalent. A logic low is 0V to 1V. A logic high is 2.5V to 50V. The maximum sink current at on/off terminal during a logic low is -500 μ A. The maximum allowable leakage current of the switch at on/off terminal (2.5 to 50V) is 500 μ A.

Overload Protection


To provide protection in a fault (output overload) condition, the unit is equipped with internal current limiting circuitry and can endure current limiting for an unlimited duration. At the point of current-limit inception, the unit shifts from voltage control to current control. The unit operates normally once the output current is brought back into its specified range.

Input Source Impedance

The power module should be connected to a low ac-impedance input source. Highly inductive source impedances can affect the stability of the power module.



In applications where power is supplied over long lines and output loading is high, it may be necessary to use a capacitor at the input to ensure startup.

Capacitor mounted close to the power module helps ensure stability of the unit, it is recommended to use a good quality low Equivalent Series Resistance (ESR < 1.0 Ω at 100 kHz) capacitor of a 6.8 μ F for the 24V and 48V devices.



Output Ripple Reduction

A good quality low ESR capacitor placed as close as practicable across the load will give the best ripple and noise performance. To reduce output ripple, it is recommended to use 4.7 μ F capacitors at the output.

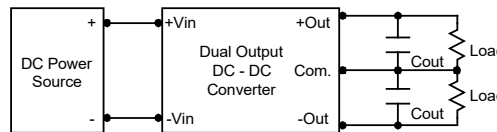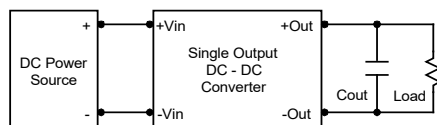

Maximum Capacitive Load

The MJWI30 series has limitation of maximum connected capacitance at the output. The power module may be operated in current limiting mode during start-up, affecting the ramp-up and the startup time. The maximum capacitance can be found in the data sheet.

Thermal Considerations

Many conditions affect the thermal performance of the power module, such as orientation, airflow over the module and board spacing. To avoid exceeding the maximum temperature rating of the components inside the power module, the case temperature must be kept below 105 $^{\circ}$ C. The derating curves are determined from measurements obtained in a test setup.

