



Quality Products. Service Excellence.


500mw Audio Miniature Epoxy Potted 108 Series

PC Board Mount

Features



- Perfect for audio input, line matching, isolation or output transformer applications.
- 500 milliwatt (+/- 1.5 db, 300 Hz. - 50 KHz.).
- Epoxy potted in an attractive black molded case, Pin type P.C. board mount (min. 0.187" length).
- In some models where no center tap is required (on secondary), pin No. 5 is omitted.
- Power level ratings are maximum at lowest frequency rating (see charts & PDF spec. sheets below)
- Power can be increased slightly at higher frequencies. See individual PDF specs. for specifics.
- Will withstand soldering for 10 sec. @ 260 degrees C, ambient temp. 85 degrees C max.

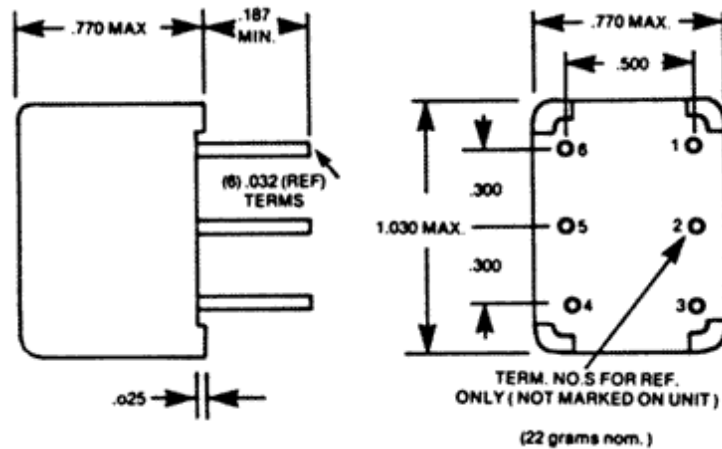

| Part No. | Nominal Impedance (Ohms) | | D.C. Resistance (Ohms) +/- 20% | | Max. D.C. Unbalance (ma.) |
|----------|--------------------------|----------------------|--------------------------------|----------------------|---------------------------|
| | Primary (Pins 1-3) | Secondary (Pins 4-6) | Primary (Pins 1-3) | Secondary (Pins 4-6) | |
| 108E | 600 ct | 3.2 | 65 | 0.43 | 6 |
| 108F | 600 ct | 150 ct | 65 | 18 | 6 |
| 108G | 600 ct | 250 ct | 65 | 29 | 6 |
| 108H | 600 ct | 600 ct | 65 | 69 | 6 |
| 108J | 1K ct | 600 ct | 109 | 69 | 4.5 |
| 108K | 1.5K ct | 600 ct | 170 | 69 | 4 |
| 108L | 10K ct | 3.2 | 1050 | 0.43 | 1.5 |
| 108N | 10K ct | 600 ct | 1050 | 69 | 1.5 |
| 108P | 10K ct | 1.5K ct | 1050 | 180 | 1.5 |
| 108T | 10K ct | 10K ct | 1050 | 1200 | 1.5 |

Data subject to change without notice

