## Type PMA-KS-06-Q1S **Panel Mount Fuse Holder** <sup>1</sup>/<sub>4</sub>" x 1<sup>1</sup>/<sub>4</sub>" (6.3 x 32mm) Fuses **Knob / Screw**




www.optifuse.com

(619) 593-5050

Electrical Rating: 15A, 250V AC **Fuse Style:** <sup>1</sup>/<sub>4</sub>" x 1<sup>1</sup>/<sub>4</sub>" (6.3 x 32mm) **Material:** Frame: Phenolic (UL flame: 94V-1) Cap: PBT (UL flame: 94V-0) **Terminals:** Tin-plated brass **Cap:** Knob type, Screw type Mounting: by nut Terminal: Solder/Quick-Connect 4.8mm / 0.187" Panel Thickness: 0.5 ~ 4.5mm Agency Standards and Listings:

## SP

**Product Dimensions: Inches [mm]** 

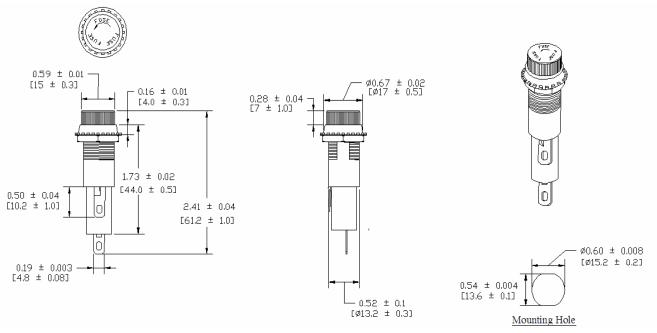



-Operation beyond the specified maximum ratings or improper use may result in damage and possible electrical arcing and/or flame.

-Fuse Holders are not intended for circuit disconnect. All power should be disconnected before removing fuse. -Avoid contact of Fuse Holder with chemical solvent. Prolonged contact may damage the device performance.