

1531.5

RK 16/35/N/IS BU

RK 16/35/N/IS BU



Feed-through terminal, Screw connection, Mounting type: Mounting rail TS 35/7.5, Rated cross-section: 16 mm<sup>2</sup>, Width: 12 mm, Colour: Blue

## Business data

Product description	Feed-through terminal
Packaging unit	50
Quantity unit	PC
Weight per piece (not including packaging)	26.85
Weight per piece (including packaging)	28.64
Unit of weight	G
Customs number	85369010
Country of origin	DE

**1531.5**

**RK 16/35/N/IS BU**

**RK 16/35/N/IS BU**

## Technical Data

---

### Dimensions

---

Length	54 mm
Width	12 mm
Height TS 35/7.5	47 mm

### Ratings

---

Rated voltage	800 V
Rated current	76 A
Rated cross-section	16 mm <sup>2</sup>
Rated impulse voltage	8 kV
Overvoltage category	III
Contamination degree	3

**1531.5**

**RK 16/35/N/IS BU**

**RK 16/35/N/IS BU**

## Technical Data

---

### Connection data

Connection principle	Screw connection
Connection position	Lateral
Connections	2
Number of terminals per level	2
Number of levels	1
Wire cross-section single-core (rigid) / stranded, min.	2.5 mm <sup>2</sup>
Wire cross-section single core (rigid)/stranded, max.	25 mm <sup>2</sup>
Wire cross-section stranded, min.	2.5 mm <sup>2</sup>
Wire cross-section stranded, max.	16 mm <sup>2</sup>
Wire cross-section stranded with wire-end ferrules, min.	2.5 mm <sup>2</sup>
Wire cross-section stranded with wire-end ferrules, max.	16 mm <sup>2</sup>
Wire cross-section AWG, min.	10
Wire cross-section AWG, max.	6
Stripping length	15 mm
Screw head	Inner hex (Allen)
Screw threading	M 5
Tightening torque, min.	2 Nm
Tightening torque, max.	4 Nm

**1531.5**

**RK 16/35/N/IS BU**

**RK 16/35/N/IS BU**

## Technical Data

---

### Materials

---

Insulation housing	Polyamide 6.6
--------------------	---------------

Flammability class UL 94	V-2
--------------------------	-----

Working temperature, min.	-40 °C
---------------------------	--------

Working temperature, max.	105 °C
---------------------------	--------

### Further technical data

---

Mounting type	Mounting rail TS 35/7,5
---------------	-------------------------

Gauge plug acc. to EN 60 947-1	B7
--------------------------------	----

Number of cross-connection channels	1
-------------------------------------	---

**1531.5**

**RK 16/35/N/IS BU**

**RK 16/35/N/IS BU**

## Approvals

---

### Standards and regulations

---

EAC approval	TR ZU 004/2011
--------------	----------------

EAC approval granted	✓
----------------------	---

### CSA approval

---

CSA approval	C22.2 No 158
--------------	--------------

CSA approval granted	✓
----------------------	---

CSA Usegroup C: rated voltage	600 V
-------------------------------	-------

CSA Usegroup C: rated current	85 A
-------------------------------	------

CSA wire cross-section AWG, min.	12
----------------------------------	----

CSA wire cross-section AWG, max.	4
----------------------------------	---

CSA stripping length	15 mm
----------------------	-------

### CSAus approval

---

CSAus approval	UL 1059
----------------	---------

CSAus approval granted	✓
------------------------	---

CSAus Usegroup C: rated voltage	600 V
---------------------------------	-------

CSAus Usegroup C: rated current	85 A
---------------------------------	------

CSAus wire cross-section AWG, min.	12
------------------------------------	----

**1531.5**

**RK 16/35/N/IS BU**

**RK 16/35/N/IS BU**

## Approvals

---

### CSAus approval

---

CSAus wire cross-section AWG, max.	4
CSAus stripping length	15 mm

### cUL Recognized

---

cUL Recognized	C22.2 No 158
cUL Recognized	✓
cUL Usegroup C: rated voltage	600 V
cUL Usegroup C: rated current	85 A
cUL wire cross-section single-core (rigid) AWG, min.	10
cUL wire cross-section single-core (rigid) AWG, max.	4
cUL wire cross-section stranded AWG, min.	10
cUL wire cross-section stranded AWG, max.	4
cUL torque	20 Nm
cUL wire material	Cu

**1531.5**

**RK 16/35/N/IS BU**

**RK 16/35/N/IS BU**

## Approvals

---

### German Lloyd approval

---

GL approval	IEC 60947-7-1
GL approval granted	✓
GL rated voltage	800 V
GL rated current	76 A
GL rated cross-section	16 mm <sup>2</sup>
GL environmental category	C

### KEMA KEUR approval

---

KEMA KEUR approval	EN 60947-7-1
KEMA KEUR approval granted	✓
KEMA rated voltage	800 V
KEMA rated current	76 A
KEMA rated impulse voltage	8 kV
KEMA wire cross-section single core (rigid), min.	2.5 mm <sup>2</sup>
KEMA wire cross-section single-core (rigid), max.	25 mm <sup>2</sup>
KEMA wire cross-section stranded, min.	2.5 mm <sup>2</sup>
KEMA wire cross-section stranded, max.	16 mm <sup>2</sup>

**1531.5**

**RK 16/35/N/IS BU**

**RK 16/35/N/IS BU**

## Approvals

---

### UL Recognized

UL Recognized	UL 1059
UL Recognized granted	✓
UL Usegroup C: rated voltage	600 V
UL Usegroup C: rated current	85 A
UL wire cross-section single-core (rigid) AWG, min.	10
UL wire cross-section single-core (rigid) AWG, max.	4
UL wire cross-section stranded AWG, min.	10
UL wire cross-section stranded AWG, max.	4
UL torque	20 Lb In
UL wire material	Cu
UL factory wiring	✓
UL field wiring	✓




1531.5

RK 16/35/N/IS BU


RK 16/35/N/IS BU

## Media


---

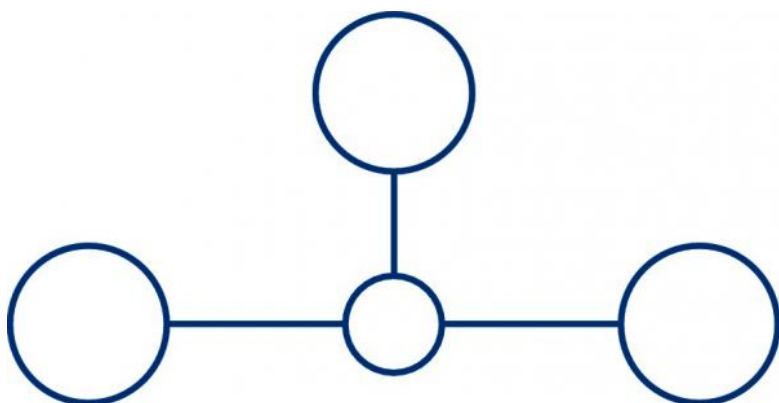

**M5**



**EAC**

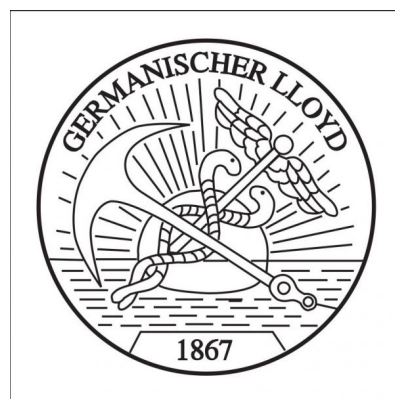

1531.5

RK 16/35/N/IS BU

RK 16/35/N/IS BU

Media

---



1531.5

RK 16/35/N/IS BU

RK 16/35/N/IS BU

## Accessories

---

### Cover

---



Cover, Length: 26.5 mm, Width: 12 mm, Colour: Yellow

### In general

Order number	Article designation	GTIN (EAN)	Packaging unit
2955.0	AD 1/12/N/B	4044211056834	20 PC

---



Cover, Length: 26.5 mm, Width: 12 mm, Colour: White

### In general

Order number	Article designation	GTIN (EAN)	Packaging unit
2967.0	AD 1/12/N	4044211056964	20 PC

---

1531.5

RK 16/35/N/IS BU


RK 16/35/N/IS BU

## Accessories

---

### End bracket

---



End stop, Mounting type: Mounting rail TS 35/7.5,  
Width: 9.5 mm, Colour: Beige

### In general

Order number	Article designation	GTIN (EAN)	Packaging unit
2828.0	ES 35/K/ST	4044211055547	50 PC

---

### Cross connector

---



Cross-connector, No. of poles: 10, Mounting type: Can  
be screwed on, Width: 115.3 mm, Rated cross-  
section: 16 mm<sup>2</sup>, Colour: natural

### In general

Order number	Article designation	GTIN (EAN)	Packaging unit
2266.0	Q 10	4044211050757	10 PC

---

1531.5

RK 16/35/N/IS BU


RK 16/35/N/IS BU

## Accessories

---

### Cross connector

---



Cross-connector, No. of poles: 2, Mounting type: Can be screwed on, Width: 20.1 mm, Rated cross-section: 16 mm<sup>2</sup>, Colour: natural

### In general

Order number	Article designation	GTIN (EAN)	Packaging unit
2257.0	Q 2	4044211050702	20 PC

---



Cross-connector, No. of poles: 3, Mounting type: Can be screwed on, Width: 32 mm, Rated cross-section: 16 mm<sup>2</sup>, Colour: natural

### In general

Order number	Article designation	GTIN (EAN)	Packaging unit
2258.0	Q 3	4044211050719	20 PC

---

1531.5

RK 16/35/N/IS BU

RK 16/35/N/IS BU

## Accessories

---

### Cross connector

---



Cross-connector, No. of poles: 4, Mounting type: Can be screwed on, Width: 43.9 mm, Rated cross-section: 16 mm<sup>2</sup>, Colour: natural


### In general

Order number	Article designation	GTIN (EAN)	Packaging unit
2265.0	Q 4	4044211050740	10 PC

---

### Quick-marking

---



Terminal marker / Pocket Maxicard, Length: 5 mm, Width: 6 mm, Colour: White

### In general

Order number	Article designation	GTIN (EAN)	Packaging unit
4702.7	PMC SB 6/50 WH	4044211089986	500 PC

---